



Your Complete Refrigeration Source

Beverage-Air is a leading domestic manufacturer of commercial refrigeration solutions, with a vast product offering including over 1,000 unique models across 31 product series and 11 product categories. Manufactured in Brookville, Pennsylvania and headquartered in Winston-Salem, North Carolina, Beverage-Air is committed to producing American made equipment for the foodservice market.


Founded in 1944, Beverage-Air was acquired by the Ali Group, one of the largest and most diversified global leaders in the foodservice and equipment industry, in 2008. Today, the Ali Group employs more than 14,000 people in 34 countries and operates 75 manufacturing facilities worldwide. Often times, second and third generation employees work side by side to drive innovative thinking and quality manufacturing.

Our expansive product offering allows us to meet any operator's refrigeration need whether it be front of the house, back of the house, food preparation or point of sale merchandising. With seemingly unlimited customizable options, award winning design innovation and unparalleled customer commitment, Beverage-Air continues to be a trusted partner in the food service industry. Whether it's national accounts, high-end restaurants or small operations, Beverage-Air has a solution for any food service application.







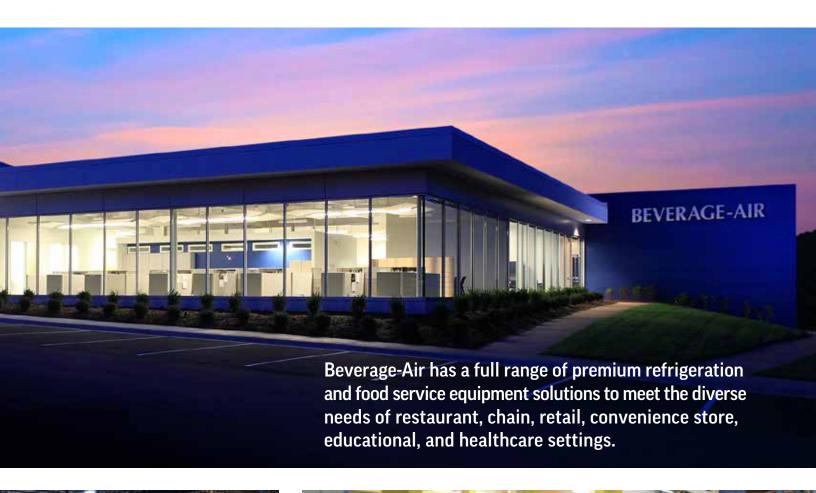







AFTERMARKET SERVICES

As a Beverage-Air customer, our commitment to you continues with the ongoing support of our aftermarket services. This program provides you access to a full range of support tools.

YOU HAVE ACCESS TO THE FOLLOWING:

- · Ongoing technical support via telephone
- · Product Customization
- Qualified parts distributor network
- · Qualified network of reputable service technicians
- Service and maintenance dispatch
- · Online manuals & parts breakdown
- Online warranty claims processing (warranty at back of catalog)

CUSTOMER COMMITMENT

Committed to innovation, excellence, and customer satisfaction, Beverage-Air continually works to leverage efficiencies in manufacturing and distribution to benefit our customers.

WE COMMIT ALL OF THE FOLLOWING TO YOU:

- · Industry-leading quality and customer satisfaction
- · Award-winning product innovation
- · Competitive pricing
- · Factory Inventory
- · Energy efficient products
- · Complete aftermarket services

Factory Headquarters Sales Office 3779 Champion Blvd Winston-Salem, NC 27105

Phone: (336) 245-6400
Fax: (336) 245-6453
Email: sales@bevair.com
Web: www.beverage-air.com

Warranty Service Dispatch

(877) 866-1223

Factory Technical Service

Phone: (800) 684-1199 Fax: (800) 262-9381

Factory Customer Service

Phone: (888) 845-9800 Fax: (800) 253-5168



TABLE OF CONTENTS

Top Mount Ro	each-Ins	4
HR/HF	Horizon Series	6
TMR/TMF	TM Series	10
PR/PF	P Series	12
СТ	Cross Temp Series	18
Bottom Mou	nt Reach-Ins	24
RB/FB	Vista Series	26
HBR/HBF	Horizon Series	30
SR/SF	Slate Series	36
RI	RI Series	38
Warming Cal	oinets	42
НН	Horizon Series	44
PH	P Series	46
Glass Door M	erchandisers	52
MT	Marketeer Series	54
MM	MarketMax Series	56
CF/CT	Countertop Units	64
BDC/NC	Dipping Cabinets	66
Open Air Mer	chandisers	72
BZ	Breeze Series	74
VM	VueMax	76
Deli Cases		80
CDR	Deli Cases	82

Food Prep Table	es	84
SPE	Sandwich Prep Tables	86
DP	Pizza Prep Tables	98
SPE-S	Salad Bars	102
Worktops & Un	dercounters	110
WTR/WTF	Worktops	112
UCR/UCF	Undercounters	124
Chef Bases		134
WTRCS/WTFCS	Chef Bases	136
Bar & Wine Equ	ipment	140
DD/DZ/BM	Direct Draw	142
BM23/DZ24	Bar Mobile	146
BB/DZ	Back Bar	148
DW	Bottle Coolers	158
GF/FLG	Glass & Plate Chiller	160
Milk Coolers		166
SM/SMF	Single Access	169
ST/STF	Dual Access	170
Blast Chillers / S	Shock Freezers	172
CF/BF	Self Contained	174
BF	Remote	176
BF200	Blast Chiller/Freezer/Thawer	180
Beverage-Air		
	Warranty	182
	Contacts/Directory	184

©2023 Beverage-Air. All rights reserved. Beverage-Air, Horizon, Vista, Cross Temp, Marketeer, MarketMax, Breeze, and VueMax are trademarks of Beverage-Air. Beverage-Air cannot be held responsible for typographical or photographic errors. Photos of units in working environments may show custom or third-party modifications which may not be available from our factory. Beverage-Air, 3779 Champion Blvd, Winston-Salem, NC 27105









TOP MOUNT REACH-INS

DESIGNED TO EXCEED EXPECTATIONS IN TOUGH KITCHEN ENVIRONMENTS



Horizon Series



TM Series



P Series



Cross Temp[®]





HORIZON[®] SERIES

Refrigerators & Freezers



Designed to perform in high ambient conditions

3 year parts and labor warranty with an additional 4 year compressor part warranty

Made in USA



Heavy Duty Construction

2" CFC and HCFC-free foamed-in place polyurethane insulation

Full electronic Control

with one-touch defrost

Multiple finish options

Door locks standard

Solid doors only (optional on glass door models)

Field-reversible doors

Solid doors only

Cam-lift hinges

with 120 degree stay open feature

Sealed system makes service and maintenance quick and easy

LED lighting standard

Back rack airflow distribution system

Self-closing doors

6" heavy duty casters standard

3" casters or 6" leg option available at no charge when specified on order

Environmentally friendly, energy efficient R290 refrigerant

AVAILABLE DOORS

- Solid (one full-door)
- Half Solid (two half-doors)
- Glass (one full-door)
- Half Glass (two half-doors)





BACK CHANNEL to promote air flow



FIELD-REVERSIBLE DOORS for flexibility to get your kitchen set up exactly how you want it

EXTERIOR FINISHES

- · Stainless steel front with gray painted steel sides
- · Stainless steel sides/front

INTERIOR FINISHES

- · Corrosion resistant aluminum
- · Stainless steel

AVAILABLE OPTIONS

- · Left hinge doors
- · Remote models available

AVAILABLE ACCESSORIES

- Tray Slides
- · Additional shelves

MOUNTING OPTIONS

- · 6" casters (standard)
- 6" legs
- 3" casters
- · Flanged/seismic feet

AGENCY CERTIFICATIONS



1, 2, AND 3 SECTION MODELS AVAILABLE







HORIZON[®] SERIES

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
	HR1HC-1S	SOLID	1/3				115	1/4	2.7	21.17
1	HR1HC-1HS	HALF SOLID	2/3	00	22.62	70.5	115	1/4	2.7	21.17
SECTION	HR1HC-1G	GLASS	1/3	26	33.63	3.63 78.5	445	4/4	0.7	00.00
	HR1HC-1HG	HALF GLASS	2/3				115	1/4	2.7	22.28
1 WIDE	HR1WHC-1S	SOLID	1/2	25	22.62	70 F	115	1/4	2.7	20.70
SECTION	HR1WHC-1G	GLASS	1/3	35	33.63	78.5	113	1/4	2.7	30.76
	HR2HC-1S	SOLID	2/6		22.62	78.5		1/3	6	
2	HR2HC-1HS	HALF SOLID	4/6	F 2			115			40.00
SECTIONS	HR2HC-1G	GLASS	2/6	52	33.63					46.88
	HR2HC-1HG	HALF GLASS	4/6							
	HR3HC-1S	SOLID	3/9							
3	HR3HC-1HS	HALF SOLID	6/9	70	22.62	70 5	445	1/0		74.50
SECTIONS	HR3HC-1G	GLASS	3/9	78	33.63	78.5	115	1/3	6	71.52
	HR3HC-1HG	HALF GLASS	6/9							

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.


	FINISH OPT	IONS REFRIGERATOR & FI	REEZER
SUFFIX	EXAMPLE	EXTERIOR	INTERIOR
(standard)	HR1HC-1S	Stainless steel front with gray painted steel sides	Corrosion resistant aluminum
P	HRP1HC-1S	Stainless steel front with stainless steel sides	Corrosion resistant aluminum
s	HRS1HC-1S	Stainless steel front with gray painted steel sides	Stainless steel
PS	HRPS1HC-1S	Stainless steel front with stainless steel sides	Stainless steel



Stainless steel



Gray painted steel





Left hinge door (-18)

FREEZERS


MAINTAINS PRODUCT TEMPERATURES OF -10°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
	HF1HC-1S	SOLID	1/3							
1	HF1HC-1HS	HALF SOLID	2/3	20	33.63	78.5	115		11	24.00
SECTION	HF1HC-1G	GLASS	1/3	26	33.03	70.3		3/4	11	21.06
	HF1HC-1HG	HALF GLASS	2/3							
1 WIDE Section	HF1WHC-1S	SOLID	1/3	35	33.63	78.5	115	3/4	11	30.76
	HF2HC-1S	SOLID	2/6		33.63 78	78.5	115	3/4+	40	
2	HF2HC-1HS	HALF SOLID	4/6	50			115	3/4+	10	45.2
SECTIONS	HF2HC-1G	GLASS	2/6	52			445	2/4 (V2)	40.0	45.2
	HF2HC-1HG	HALF GLASS	4/6				115	3/4 (X2)	13.2	
	HF3HC-1S	SOLID	3/9							
3	HF3HC-1HS	HALF SOLID	6/9	70	22.62	70 F	445	2/4 (V2)	40.0	69
SECTIONS	HF3HC-1G	GLASS	3/9	78	33.63	78.5	115	3/4 (X2)	13.2	69
	HF3HC-1HG	HALF GLASS	6/9							

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

ADAPTIVE DEFROST

- Reduces energy consumption up to 15%
- · Units are able to provide a consistent product temperature throughout the cabinet even during defrost cycles
- · Reduces the overall time defrosting versus traditional timed defrost
- Example: Adaptive Defrost: 48 min total in 4 cycles versus 60 min in 3 cycles (Traditional 8HR)
- · High Ambient and Humidity testing shows the system's ability to perform better in high usage environments under unfavorable conditions

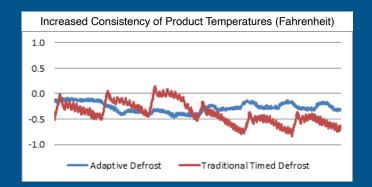





TM SERIES

Refrigerators & Freezers



Stainless steel exterior and interior standard

Energy efficient R290 provides solution for all environmental concerns

2 year parts and labor warranty with an additional 5 year compressor part warranty

Full electronic control

Stainless steel exterior and interior

Easy access to the refrigeration

Uses environmentally friendly, energy efficient R290 refrigerant

Hot gas condensate evaporator

Hot gas face heater (freezers only)

Electric defrost heater

LED lighting standard

3 epoxy coated wire shelves per section



FANS IN COOLER MODELS

are set back and higher than the freezer fans, accommodating more product while holding its set temperature



FANS IN FREEZER MODELS

increase the cold air flow to create consistent temperature throughout the unit

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1 SECTION	TMR1HC-1S	SOLID	1/3	26.313	33.563	74.688	115	1/4	3	19
2 SECTIONS	TMR2HC-1S	SOLID	2/6	53.969	33.563	74.688	120	1/2	5.3	40

Depth measurement includes handles. For total height, add 6 inches for casters.

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF 0°F AND BELOW.

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1 SECTION	TMR1HC-1S	SOLID	1/3	26.313	33.563	74.688	120	1/2	4.73	19
2 SECTIONS	TMR2HC-1S	SOLID	2/6	53.969	33.563	74.688	120	1/2	8.3	40

Depth measurement includes handles. For total height, add 6 inches for casters.

AVAILABLE DOORS

Solid (one full-door)

EXTERIOR FINISHES

· Stainless steel

INTERIOR FINISHES

Stainless steel

MOUNTING OPTIONS

• 6" casters (standard)

AGENCY CERTIFICATIONS









P SERIES

Spec Line Refrigeration



Maximum resistance to wear and tear with stainless steel breaker caps and door liners

Configurable interior gives ultimate flexibility for shelf and slide combinations

3 year parts and labor warranty with an additional 4 year compressor part warranty

LED lighting

Full electronic control

Self-closing doors

with 120° stay-open feature, on cam-lift hinges

Expansion valve technology

Freezer only

Door locks standard

Solid and Glass doors

Magnetic gasket attached to each door

for positive seal

Sealed system makes service and maintenance quick and easy

6" adjustable legs

(3" casters or 6" caster option available at no charge when specified on order)

3 epoxy coated wire shelves

per section

Removable access panel

for ease of service and maintenance



AVAILABLE DOORS

- Solid (one full-door)
- Half Solid (two half-doors)
- Glass (one full-door)
- Half Glass (two half-doors)





TRAY SLIDES A AVAILABLE holds one 18x26" or two 14x18"



TRAY SLIDES A/C AVAILABLE hold one 18x26", or two 14x18", or two 12x20"

EXTERIOR FINISHES

· Stainless steel

INTERIOR FINISHES

- · Corrosion-resistant aluminum
- · Stainless steel

AVAILABLE OPTIONS

- · Left hinge doors
- · Remote models available

AVAILABLE ACCESSORIES

- Additional shelves
- · Tray slide kits (reach-in & pass-thru only)
- · Stainless steel shelves
- · Kick plate

MOUNTING OPTIONS

- 6" legs (standard)
- 6" casters
- · 3" casters
- · Flanged/seismic feet

AGENCY CERTIFICATIONS







1, 2, AND 3 SECTION MODELS AVAILABLE IN REACH-IN, PASS-THRU, ROLL-IN AND ROLL-THRU







P SERIES

REFRIGERATORS - REACH IN

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
	PR1HC-1AS	SOLID	1/3	26.50	34.63	77.75	115	1/2	6.5	21.01
1	PR1HC-1AHS	HALF SOLID	2/3	20.30	34.03	//./3	115	1/3	0.5	21.01
SECTION	PR1HC-1BG	GLASS	1/3	26.50	33.38	77.75	115	1/3	6.5	21.01
	PR1HC-1BHG	HALF GLASS	2/3	20.30	33.30	//./3	115	1/3	0.0	21.01
	PR2HC-1AS	SOLID	2/6	F0.40	34.63	77.75	115	1/2	6.5	44.57
2	PR2HC-1AHS	HALF SOLID	4/6	52.13	34.03	77.73	115	1/3	0.5	44.57
SECTIONS	PR2HC-1BG	GLASS	2/6	52.13	22.20	7775	115	1/2	6 5	44.57
	PR2HC-1BHG	HALF GLASS	4/6	32.13	33.38	77.75	115	1/2	6.5	44.57
	PR3HC-1AS	SOLID	3/9	77.76	34.63	77.75	115	3/4	8.5	68.34
3	PR3HC-1AHS	HALF SOLID	6/9	77.75	34.03	//./3	115	3/4	6.5	00.34
SECTIONS	PR3HC-1BG	GLASS	3/9	77.75	22.20	7775	115	2/4	0.5	60.24
	PR3HC-1BHG	HALF GLASS	6/9	77.75	33.38	77.75	115	3/4	8.5	68.34

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS - PASS-THRU

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	HP	AMPS	CUBIC FEET
	PRD1HC-1AS	SOLID	2/3						6.5	
1	PRD1HC-1AHS	HALF SOLID	4/3	26.50	38.38	77.75	115	1/0		22.9
SECTION	PRD1HC-1BG	GLASS	2/3	20.30	30.30			1/3	6.5	22.5
	PRD1HC-1BHG	HALF GLASS	4/3							
	PRD2HC-1AS	SOLID	4/6				115	1/3	6.5	48.33
2	PRD2HC-1AHS	HALF SOLID	8/6	52.13	38.38	38.38 77.75	110	1/3	0.0	40.33
SECTIONS	PRD2HC-1BG	GLASS	4/6				115	3/4	8.5	48.33
	PRD2HC-1BHG	HALF GLASS	8/6				113	3/4	0.5	40.33
	PRD3HC-1AS	SOLID	6/9				115	3/4	8.5	74
3	PRD3HC-1AHS HALF SOLID 12/9	77.75	38.38	77.75	113	3/4	0.5	/4		
SECTIONS	PRD3HC-1BG	GLASS	6/9	77.75	30.36	//./3	115	1/3 (X2)	10.8	75.1
	PRD3HC-1BHG	HALF GLASS	12/9				115	1/3 (A2)	10.0	73.1

 $Depth\ measurement\ includes\ handles.\ For\ total\ height,\ add\ 3\ or\ 6\ inches,\ based\ on\ your\ mounting\ choice.$

REFRIGERATORS - ROLL-IN

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1	PRI1HC-1AS	SOLID	4	36.5	36.13	84	115	1/3	6.5	34.86
SECTION	PRI1XTHC-1AS	SOLID	ı	30.3	30.13	89.63	115	1/3	6.5	38.06
2	PRI2HC-1AS	COLUD		00.00	20.40	84	445	2/1		70.84
SECTIONS	PRI2XTHC-1AS	SOLID	2	68.88	36.13	89.63	115	3/4	8.5	77.35
3 SECTIONS	PRI3HC-1AS	SOLID	3	101.25	36.13	84	115	2x 1/3	10.8	106.81

Depth measurement includes handles.

REFRIGERATORS - ROLL-THRU

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1	PRT1HC-1AS	SOLID	2	36.5	39.88	84	115	3/4	8.5	38.69
SECTION	PRT1XTHC-1AS	SOLID	2	30.3	33.00	89.63	115	3/4	6.5	42.27
2	2 PRT2HC-1AS	SOLID	4	68.88	39.88	84	115	2/4	8.5	78.49
SECTIONS	PRT2XTHC-1AS	SULID	4	00.00	39.00	89.63	115	3/4	0.5	85.76
3 SECTIONS	PRT3HC-1AS	SOLID	6	101.25	39.88	84	115	2x 1/3	10.8	118.3

Depth measurement includes handles.







P SERIES

FREEZERS - REACH IN

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
	PF1HC-1AS	SOLID	1/3	26.50	34.63	77.75	115	3/4	9.1	21.01
1	PF1HC-1AHS	HALF SOLID	2/3	20.30	34.03	//./3	115	3/4	9.1	21.01
SECTION	PF1HC-1BG	GLASS	1/3	26.50	33.38	77.75	115	3/4	9.1	21.01
	PF1HC-1BHG	HALF GLASS	2/3	20.30	33.30	//./3	115	3/4	9.1	21.01
	PF2HC-1AS	SOLID	2/6	F0.40	34.63	77.75	115	2/4.	10 F	44.57
2	PF2HC-1AHS	HALF SOLID	4/6	52.13	34.03	77.73	115	3/4+	10.5	44.57
SECTIONS	PF2HC-1BG	GLASS	2/6	52.13	22.20	77.75	115	2 X 3/4	13.9	44.57
	PF2HC-1BHG	HALF GLASS	4/6	32.13	33.38	77.75	115	2 A 3/4	13.3	44.57
	PF3HC-1AS	SOLID	3/9	77.75	34.63	77.75	115	2 X 3/4	13.9	68.34
3	PF3HC-1AHS	HALF SOLID	6/9	//./3	34.03	//./3	115	2 X 3/4	13.9	00.34
SECTIONS	PF3HC-1BG	GLASS	3/9	77.75	33.38	77.75	115	2 7 2/4	13.9	60.24
	PF3HC-1BHG	HALF GLASS	6/9		33.36	//./3	115	2 X 3/4	13.3	68.34

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

FREEZERS - PASS-THRU

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
	PFD1HC-1AS	SOLID	2/3	26.50	38.38	77.75	115	3/4	9.1	22.9
1	PFD1HC-1AHS	HALF SOLID	4/3	26.50	30.30	77.73				22.9
SECTION	PFD1HC-1BG	GLASS	2/3		35.88	77.75	115	3/4	9.1	22.9
	PFD1HC-1BHG	HALF GLASS	4/3		33.00	77.75	.13	3/4	3.1	22.3
	PFD2HC-1AS	SOLID	4/6	F0.40	00.00	22.25	115	3/4+	10.5	48.33
2	PFD2HC-1AHS	HALF SOLID	8/6	52.13	38.38	77.75				
SECTIONS	PFD2HC-1BG	GLASS	4/6	E2 12	35.88	77.75	115	2 X 3/4	13.9	48.33
	PFD2HC-1BHG	HALF GLASS	8/6	52.13	33.88	77.75	115			48.66

 ${\it Depth\ measurement\ includes\ handles.}\ {\it For\ total\ height,\ add\ 3\ or\ 6\ inches,\ based\ on\ your\ mounting\ choice.}$

FREEZERS - ROLL-IN

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1	PFI1HC-1AS	SOLID		36.5	36.13	84	115	3/4	9.1	34.86
SECTION	PFI1XTHC-1AS	SULID	•	30.3	30.13	89.63	113	3/4	J.1	38.06
2	PFI2HC-1AS	COLID	2	68.88	36.13	84	115	2 X 3/4	13.9	70.84
SECTIONS	PFI2XTHC-1AS	SOLID	2			89.63	115			77.35
3 SECTIONS	PFI3HC-1AS	SOLID	3	101.25	36.13	84	115	2 X 3/4	13.9	106.81

Depth measurement includes handles.

FREEZERS - ROLL-THRU

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1 SECTION	PFT1HC-1AS	SOLID	2	36.5	39.88	84	115	3/4+	10.5	38.69
	PFT1XTHC-1AS		2	30.3		89.63	113			42.27
2	PFT2HC-1AS	00110	4	68.88	39.88	84	115	2 X 3/4	13.9	78.49
SECTIONS	PFT2XTHC-1AS	SOLID				89.63				85.76

Depth measurement includes handles.

DUAL-TEMPS - REACH-IN

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F (REFRIGERATOR), AND -10°F (FREEZER).

SECTIONS	MODEL#	DOOR TYPE	DOORS/ Shelves	WIDTH	DEPTH	HEIGHT	VOLTS	HP	AMPS	CUBIC FEET
2 HALF SECTIONS	PRF12-12HC-1HS	HALF SOLID	2/4	26.63	34.63	77.75	115 (X2)	R: 1/3	R: 7.5	R: 9
1 FREEZER)	PRF12-12HC-1HG	HALF GLASS	2/4	20.03	34.03	77.73	113 (X2)	F: 1/3	F: 7.5	F: 9
2 SECTIONS	PRF24-24HC-1AS	SOLID	2/0	52	22	77.75	44E (V.2)	R: 1/3	R: 6.5	R: 21
(1 REFRIGERATOR 1 FREEZER)	PRF24-24HC-1AHS	HALF SOLID	2/6		33	77.75	115 (X2)	F: 3/4	F: 9.1	F: 21

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.







CROSS TEMP® SERIES

Convertible Refrigeration



NEW 2-SECTION SIZE!

Variable speed compressor technology achieves up to 30% more energy efficiency compared to a single-speed

3 year parts and labor warranty with an additional 4 year compressor part warranty

Temperature range of -15 to 40° F

Modulates coil temp to achieve desired set point

while achieving maximum energy efficiency

Single cabinet configurable to all menu initiatives

Intuitive compressor

adjusts for optimal effectiveness in high-use situations

Quicker pull-down

for both air and product temperatures

Improved product stability

Smart-defrost

Expansion valve

Rapid-recovery after defrost

consistent product temperature and ensures food quality

Door locks standard

Solid doors only (optional on glass door models)

Field-reversible doors

(except for CT12-12HC models)

Featuring environmentally friendly energy efficient R290 refrigerant



AVAILABLE DOORS

- Solid (one full-door)
- Half Solid (two half-doors)
- Glass (one full-door)
- · Half Glass (two half-doors)





EASY-TO-USE CONTROLLER to quickly adjust set points



VARIABLE SPEED SYSTEM modulates coil temp

EXTERIOR FINISHES

- · Stainless steel front with gray painted steel sides
- Stainless steel sides/front

INTERIOR FINISHES

- · Corrosion resistant aluminum
- · Stainless steel

AVAILABLE OPTIONS

· Left hinge doors

AVAILABLE ACCESSORIES

- · Tray Slides
- · Additional shelves

MOUNTING OPTIONS

- 6" casters (standard)
- 3" casters (single section only)
- · Flanged/seismic feet

AGENCY CERTIFICATIONS





Easily converts from refrigerator to freezer

with Beverage-Air's exclusive Cross Temp® technology

WHAT IS CROSS TEMP® TECHNOLOGY?

New from Beverage-Air, Cross Temp™ technology allows the user to easily switch the unit back and forth from refrigerator to freezer as needed, with a range of -15° to 40°F.

THE PURPOSE OF CROSS TEMP®

Simply put, Cross Temp technology lets the user get the most flexibility from the unit, by letting them switch from fridge to freezer as their menus change with the seasons and initiatives, including ice-cream storage.

IS CROSS TEMP ENERGY EFFICIENT?

The Cross Temp® units are intuitive and self-adjust for optimal effectiveness based on usage. Even in high-usage situations, Cross Temp units adjust to maintain maximum energy efficiency.

HOW LONG DOES THE CONVERSION TAKE?

On average, a Cross Temp unit can convert from refrigerator to freezer or vice versa, in under an hour. (Conditions and results will vary)







CROSS TEMP® SERIES

1&2 SECTIONS

CAN CONVERT BETWEEN FREEZER AND REFRIGERATOR TEMPERATURES FROM -15° TO 40°F

SECTIONS	MODEL#	DOORTYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
	CT1HC-1S	SOLID	1/3				115	4/5	8	23.1
1	CT1HC-1HS	HALF SOLID	2/3	26	33 63	33.63 78.5	113	4/3	3	۷۵.۱
SECTION	CT1HC-1G	GLASS	1/3	20	33.03		115	4/5	8	23.1
	CT1HC-1HG	HALF GLASS	2/3			113	4/5	0	23.1	
2	CT2HC-1S	SOLID	2/6	52	22 62	79	115	4/5 (X2)	13.2	45.2
SECTIONS CT2HC-1G	CT2HC-1G	GLASS	2/0	32	33.63	/9	115	4/3 (AZ)	13.2	43.2

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

DUAL TEMP - 2 HALF SECTIONS

CAN CONVERT BETWEEN FREEZER AND REFRIGERATOR TEMPERATURES FROM -15° TO 40°F

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
2 HALF SECTIONS (STACKED) CT12-12HC-1HS CT12-12HC-1HG	CT12-12HC-1HS	HALF SOLID	2/4	00.5	24.00	70.40	44E (V.O)	1: 1/3	1: 7.5	1: 9
	HALF GLASS	2/4	26.5	34.88	78.13	115 (X2)	2: 1/3	2: 7.5	2:9	

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.









Top Mount Reach-In Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING/ORGANIZERS		
Epoxy Coated Wire Shelf	H Series Flat Shelving 1 Door Unit	412-020D-01
Epoxy Coated Wire Shelf	H Series Flat Shelving HR1W Units	412-023D-01
Epoxy Coated Wire Shelf	H Series Flat Shelving 2 Door Unit	412-021D-01
Epoxy Coated Center Shelf	H Series Flat Shelving 3 Door Unit	412-022D-01
Epoxy Coated Wire Shelf	H Series Flat Shelving 3 Door Unit	412-021D-01
Epoxy Coated Wire Shelf	TM Series Flat Shelving	3062152
Epoxy Coated Wire Shelf	P Series, 1 section	50597706
Epoxy Coated Wire Shelf	P Series, 2 section or 3 section (left or right)	50597806
Epoxy Coated Wire Shelf	P Series, 3 section (center)	50597906
Epoxy Coated Wire Shelf	Cross Temp Flat Shelving 1 Door Unit (CT1)	403-889D-01
Epoxy Coated Wire Shelf	Cross Temp Flat Shelving (CT12)	50597706
S/S Shelves	H Series Flat Shelving 1 Door Unit	412-020D-04
S/S Shelves	H Series Flat Shelving 1 Door Wide Unit	412-023D-04
S/S Shelves	H Series Flat Shelving 2 & 3 Door Unit	412-021D-04
S/S Shelves	H Series Flat Shelving 3 Door Unit-Center	412-022D-04
S/S Shelves	Cross Temp Flat Shelving 1 Door Unit (CT1)	403-889D-04
Shelf Clip	Any H Series Unit / Cross Temp 1 Door Unit (CT1)	403-169A
Shelf Clips (bag of 12)	Any TM Series Unit	2079798
Shelf Clip	P Series / Cross Temp (CT12)	50022601

MOUNTING		
6" Caster (set of four)	Any H Series Unit / Cross Temp 1 Door Unit (CT1)	61C01-001A
3" Caster (set of four)	Any H Series Unit / Cross Temp 1 Door Unit (CT1)	61C01-013A
6" Black Leg (set of four)	Any H Series Unit / Cross Temp 1 Door Unit (CT1)	58B02-001A
6" Seismic/Flanged Legs (set of four)	Any H Series Unit / Cross Temp 1 Door Unit (CT1)	00C31-055A
6" Caster (no brake) (single caster)	Any TM Series Unit	3071428
6" Caster (with brake) (single caster)	Any TM Series Unit	3071429
6" Casters (set of four)	P Series	0-0140-105\$
3" Casters (set of four)	P Series	0-0140-103S
6" Seismic/Flanged Legs (set of four)	P Series	00C26-028A

ADDITIONAL ACCESSORIES		
Door Lock	Glass Door H Series / Glass Door Cross Temp (CT1) (per door)	61C11S032A
Door lock	P Series	50597111
S/S Breakers Half Door	Any H Series Unit	61C08-019A
S/S Breakers Full Door	Any H Series Unit (except extra-wide units)	61C08-020A

10601201S

Tray Slides

DESCRIPTION UNIT(S) PART NUMBER INDIVIDUAL TRAY SLIDES

1 pair of type "A" tray slides

Pilaster and mounting hardware not included. Contact us for hardware selection.

Bot	tom support for (1) 18x26" pan, or (2) 14x18" pans
DACING	2"	3"	4"
ALING			
PACING ull Door	26	18	13

1 pair of type "A/C" tray slides H-Series / Cross Temp Series (except CT12) Pilaster and mounting hardware not included. Contact us for hardware selection.

Bottom supp	ort for (1) 18x26"	pan, or (2) 14x18" p	ans, or (2) 12x20" pans
SPACING	2"	3"	4"
Full Door	26	18	13
Half Door	12	8	6

TRAY SLIDE KITS **EPOXY COATED WIRE ROD TRAY SLIDE KIT #4-1/2 SECTION** 1/2 SECTION 61C31-251A-01 **19 SLOTS** H Series - 1 Section Unit (order 2) 61C31-251A-02 H Series - 2 Section Unit (order 4) 61C31-251A-03 H Series - 3 Section Unit (order 6)







BOTTOM MOUNT REACH-INS

MULTIPLE OPTIONS TO MEET ANY COOLING CHALLENGE OR ENVIRONMENT







Horizon Series



Slate Series



RI Series





VISTA® SERIES

Refrigerators & Freezers



Designed to perform in high ambient conditions

3 year parts and labor warranty with an additional 4 year compressor part warranty

Made in USA

Full electronic control

Door locks standard

(solid doors only, optional on glass door models)

One piece grille

Cartridge style door hinges

with 120 degree stay-open feature

LED lighting standard

Self-closing doors

Right and Left hinged models available

(specify at time of order)

6" heavy duty casters standard

(3" casters or 6" leg option available at no charge when specified on order)

Environmentally friendly, energy efficient R290 refrigerant



AVAILABLE DOORS

- Solid (one full-door)
- Glass (one full-door)





DOOR LOCKS STANDARD on solid door units for loss prevention (available as an option for glass doors)



FULL ELECTRONIC CONTROL with easy to read digital display

EXTERIOR FINISHES

· Stainless steel front with gray painted steel sides

INTERIOR FINISHES

· Corrosion resistant aluminum

AVAILABLE OPTIONS

- Left hinge doors
- · Remote models available

AVAILABLE ACCESSORIES

- · Additional shelves
- · Tray slide kits

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- · 3" casters
- · Flanged/seismic feet

AGENCY CERTIFICATIONS







1, 2, AND 3 SECTION MODELS AVAILABLE







VISTA® SERIES

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORTYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1 Section	RB12HC-1S	SOLID	1/4	24	26	62	115	1/6	2	12.06
1 SHALLOW	RB19HC-1S	SOLID	1/3	27.25	27.56	78	115	1/4	3	17.87
SECTION	RB19HC-1G	GLASS	1/3	21.23	27.30	76	115	1/4	3	17.07
1	RB23HC-1S	SOLID	1/3	27.25	33.75	78	115	1/4	3	23.1
SECTION	RB23HC-1G	GLASS	1/3	27.23	33.73	76	115	1/4	3	23.1
1	RB27HC-1S	SOLID	1/3	30	33.75	78	115	1/4	3	25.88
SECTION	RB27HC-1G	GLASS	1/3	30	33./3	76	115	1/4	3	25.00
2	RB35HC-1S	SOLID	2/6	39.5	33.75	78	115	1/4	2.4	36.87
SECTIONS	RB35HC-1G	SOLID	2/0	33.3	33.73	76	113	1/4	2.4	30.07
2	RB44HC-1S	SOLID	2/6	47	33.75	78	115	1/3	5.4	44
SECTIONS	RB44HC-1G	GLASS	2/0	4/	33.73	76	113	1/3	3.4	44
2	RB49HC-1S	SOLID	2/6	52	33.75	78	115	1/3	5.4	46.15
SECTIONS	RB49HC-1G	GLASS	2/0	3 2	33./3	76	lia	1/3	5.4	40.15
3	RB72HC-1S	SOLID	3/9	75	33.75	78	115	1/2	6.2	68.93
SECTIONS	RB72HC-1G	GLASS	3/3	/5	33./3	76	115	1/2	0.2	00.93

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1 Section	FB12HC-1S	SOLID	1/3	24	26	62	115	1/2	5	11.9
1 SHALLOW SECTION	FB19HC-1S	SOLID	1/3	27.25	27.56	78	115	3/4	7.5	17.87
	FB19HC-1G	GLASS	1/3							17.07
1	FB23HC-1S	SOLID	1/2	27.25	33.75	78	115	3/4	7.5	22.5
SECTION	FB23HC-1G	GLASS	1/3							22.5
1	FB27HC-1S	SOLID	1/3	30	33.75	78	115	3/4	7.5	20.57
SECTION	FB27HC-1G	GLASS								26.57
2	FB35HC-1S	COLUD	2/6	39.5	33.75	78	115	3/4	11	36.87
SECTIONS	FB35HC-1G	SOLID								30.67
2	FB44HC-1S	SOLID	2/6	47	33.75	78	115	3/4	11	44
SECTIONS	FB44HC-1G	GLASS			33./3					44
2	FB49HC-1S	SOLID	2/6	52	33.75	78	115	3/4	11	46.2
SECTIONS	FB49HC-1G	GLASS	2/6							46.2
3 SECTIONS	FB72HC-5S	SOLID		75	33.75	78	230	3/4 (X2)	14	CO. F
	FB72HC-5G	GLASS	3/9							68.5

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.





HORIZON[®] SERIES

Refrigerators & Freezers



Designed to perform in high ambient conditions

3 year parts and labor warranty with an additional 4 year compressor part warranty

Made in USA

Heavy Duty Construction

(2" CFC and HCFC-free foamed-in place polyurethane insulation)

Full electronic Control

with one-touch defrost

Door locks standard

(solid doors only, optional on glass door models)

Cartridge-style hinges

with 120 degree stay open feature

LED lighting standard

Self-closing doors

6" heavy duty casters standard

(3" casters or 6" leg option available at no charge when specified on order)

Environmentally friendly, energy efficient R290 refrigerant



AVAILABLE DOORS

- Solid (one full-door)
- Half Solid (two half-doors)
- Glass (one full-door)
- Half Glass (two half-doors)



DOOR LOCKS STANDARD on solid door units for loss prevention (available as an option for glass doors)



FULL ELECTRONIC CONTROL with easy to read digital display

EXTERIOR FINISHES

· Stainless steel

INTERIOR FINISHES

· Stainless steel

AVAILABLE OPTIONS

- · Left hinge doors
- · Remote models available

AVAILABLE ACCESSORIES

- · Additional shelves
- · Tray slide kits
- · Wine models
- · Dual-temp

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AGENCY CERTIFICATIONS



1, 2, AND 3 SECTION MODELS AVAILABLE







HORIZON[®] SERIES

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1 Section	HBR12HC-1	SOLID	1/4	24	26	62	115	1/6	2	12.06
1 SHALLOW SECTION	HBR19HC-1	SOLID	1/3	27.25	27.75	78	115	4/4	3	17.07
	HBR19HC-1-G	GLASS	1/3	27.25	27.73		115	1/4		17.87
1	HBR23HC-1	SOLID	1/3							
	HBR23HC-1-HS	HALF SOLID	2/3			70		4/4		22.4
SECTION	HBR23HC-1-G	GLASS	1/3	27.25	33.75	78	115	1/4	3	23.1
	HBR23HC-1-HG	HALF GLASS	2/3							
	HBR27HC-1	SOLID	1/3		33.75	78	115	1/4	3	
1	HBR27HC-1-HS	HALF SOLID	2/3	20						25.88
SECTION	HBR27HC-1-G	GLASS	1/3	30						
	HBR27HC-1-HG	HALF GLASS	2/3							
2	HBR35HC-1	SOLID	2/6	20.5	22.75	78	115	1/4	2.4	20.07
SECTIONS	HBR35HC-1-G	GLASS	2/6	39.5	33.75					36.87
	HBR44HC-1	SOLID	2/6	47	33.75	78	115	1/3	5.4	
2	HBR44HC-1-HS	HALF SOLID	4/6							40.2
SECTIONS	HBR44HC-1-G	GLASS	2/6							
	HBR44HC-1-HG	HALF GLASS	4/6							
	HBR49HC-1	SOLID	2/6		33.75	78	115	1/3	5.4	
2	HBR49HC-1-HS	HALF SOLID	4/6							46.15
SECTIONS	HBR49HC-1-G	GLASS	2/6	52						
	HBR49HC-1-HG	HALF GLASS	4/6							
3 SECTIONS	HBR72HC-1	SOLID	3/9	75	33.75	78	115	1/2	6.2	68.93
	HBR72HC-1-HS	HALF SOLID	6/9							
	HBR72HC-1-G	GLASS	3/9							
	HBR72HC-1-HG	HALF GLASS	6/9							

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

SECTIONS	MODEL#	DOORTYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1 SECTION	HBF12HC-1	SOLID	1/3	24	26	62	115	1/2	5	11.9
	HBF12HC-1-G	GLASS	1/3					1/2		11.5
1SHALLOW SECTION	НВГ19НС-1	SOLID	1/3	27.25	27.75	78	115	3/4	7.5	17.87
	HBF19HC-1-G	GLASS	1/3							17.87
	HBF23HC-1	SOLID	1/2		33.75					
1	HBF23HC-1-HS	HALF SOLID	2/2	27.25		70	445	2/4	75	22.5
SECTION	HBF23HC-1-G	GLASS	1/2	21.25		78	115	3/4	7.5	22.5
	HBF23HC-1-HG	HALF GLASS								
	HBF27HC-1	SOLID	1/2	30	33.75	78	115	3/4	7.5	
1 SECTION	HBF27HC-1-HS	HALF SOLID	2/2							26.57
	HBF27HC-1-G	GLASS	1/2							
2	HBF35HC-1	SOLID	2/6	39.5	33.75	78	115	3/4	11	36.87
SECTIONS	HBF35HC-1-G	GLASS	2/0							
	НВГ44НС-1	SOLID	2/6	47	33.75	78	115	3/4	11	
2 SECTIONS	HBF44HC-1-HS	HALF SOLID	4/6							44
	HBF44HC-1-G	GLASS	2/6							
	НВF49НС-1	SOLID	2/6		33.75	78	115	3/4	11	
2 SECTIONS	НВ F49HC-1-HS	HALF SOLID	4/6	52						46.2
	НВF49HC-1-G	GLASS	2/6							
3 SECTIONS	HBF72HC-5	SOLID	3/9	75	33.75	78	230	3/4 (X2)	14	
	HBF72HC-5-HS	HALF SOLID	6/9							68.5
	HBF72HC-5-G	GLASS	3/9							





HORIZON[®] SERIES

DUAL-TEMPS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F (REFRIGERATOR), AND -10°F (FREEZER).

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
2 HALF SECTIONS (1 REFRIGERATOR 1 FREEZER)	HBRF23HC-1-A	HALF SOLID	2/4	27.25	33.75	78	115 (X2)	R: 1/10 F: 1/2	R: 2 F: 4	R: 11.5 F: 8.65
2 SECTIONS (1 REFRIGERATOR 1 FREEZER)	HBRF49HC-1-A	SOLID	2/6	52	33.75	78	115 (X2)	R: 1/4 F: 3/4	R: 2.4 F: 7.5	R: 21.01 F: 21.01
	HBRF49HC-1-A-G	GLASS								
3 SECTIONS (1 REFRIGERATOR 2 FREEZER)	HBRF72HC-1-B	SOLID	2/2	75	33.75	78	115 (X2)	R: 1/4 F: 1	R: 2.4 F: 11	R: 19.62 F: 44.85
	HBRF72HC-1-B-G	GLASS	3/9							

^{*}Freezers powered by 115/208-230 volts are designed for field wiring (requires 4-wire electrical circuit, hard-wired).

Depth measurement includes handles.



All options for Horizon Bottom Mount Dual Temps are specified within the model number using the designated codes described below.

HBRF23HC EXAMPLE

Customer orders a HBRF23HC-1-A

· The refrigerator will be on the TOP with Right hinged door. The freezer will be on the BOTTOM with Right hinged door. (RF)

HB (RF, FR) 23 - COOLER CONFIGURATIONS

HALF DOOR ON TOP - HALF DOOR ON BOTTOM

- Freezer on the Top with Right Hinged Door, Refrigerator on the **Bottom with Right Hinged Door**
- Refrigerator on the Top with Right Hinged Door, Freezer on the Bottom with Right Hinged Door
- One Refrigerator on Top, second Refrigerator on the Bottom, Right Hinged Doors

SPECIAL DOOR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER

All Left Hinged Doors

HBRF49HC EXAMPLE

Customer orders a HBRF49HC-1-A

· The refrigerator will be on the LEFT with Left hinged door. The freezer will be on the RIGHT with Right hinged door. (RF)

HB (RF, FR) 49 - COOLER CONFIGURATIONS

SINGLE DOOR ON LEFT - SINGLE DOOR ON RIGHT

- Freezer on the Left with Left Hinged Door, Refrigerator on the Right with Right Hinged Door
- Refrigerator on the Left with Left Hinged Door, Freezer on the Right with Right Hinged Door
- One Refrigerator on the Left, second Refrigerator on Right

SPECIAL DOOR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER

All Left Hinged Doors -18

All Right Hinged Doors -015

HBRF72 EXAMPLE

Customer orders a HBRF72HC-1-B

- The refrigerator will be on the left and freezer will be on the right (RF)
- . Single section on the left, and double section on the right (B)

HB (RF, FR) 72 - COOLER CONFIGURATIONS

Refrigerator/Freezer Location

- Freezer on the Left, Refrigerator on the right
- Refrigerator on the Left, Freezer on the right
- One Refrigerator on the Left, second Refrigerator on Right RR

Door Configuration

- Single section on left, Double section on right
- Double section on left, Single section on right

B DOOR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER

Standard - Single section on the Left with Left Hinged Door, 2 Door Section on the Right with Left/Right Hinged Doors

Single section on the Left with Left Hinged Door, 2 Door Section on -282 the Right with 2 Right Hinged Doors

Single section on the Left with Left Hinged Door, 2 Door Section on the Right with 2 Left Hinged Doors

Single section on the Left with Right Hinged Door, 2 Door Section on the Right with 2 Right Hinged Doors

C DOOR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER

Standard - 2 Door Section on the Left with Left/Right Hinged Doors, Single Door Section on the Right with Right Hinged Door

2 Door Section on the Left with 2 Left Hinged Doors, Single Door -18 Section on the Right with Left Hinged Door

2 Door Section on the Left with 2 Right Hinged Doors, Single Door Section on the Right with Right Hinged Door

2 Door Section on the Left with 2 Left Hinged Doors, Single Door Section on the Right with Right Hinged Door







SLATE SERIES

Refrigerators & Freezers



Features and style not found in other entry level bottom mount units

2 year parts and labor warranty with an additional 5 year compressor part warranty

Modern slate exterior finish looks great and is easy to clean

Uses environmentally friendly, energy efficient R290 refrigerant

15-25% cost reduction versus other Beverage-Air entry level bottom mount models

Refrigerator has mechanical control

Freezer has electronic control

LED lighting standard

Door locks standard

3 epoxy coated wire shelves per section



MODERN SLATE FINISH contrasts beautifully with the stainless steel doors and grille.



LED LIGHTING for dynamic product presentation

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1 SECTION	SR1HC-1S	SOLID	1/3	30.1	33.5	77.8	120	1/5	5	23
2 SECTIONS	SR2HC-1S	SOLID	2/6	52	34.9	77.8	120	1/4	6	43

Depth measurement includes handles. For total height, add 6 inches for casters.

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF 0°F.

SECTIONS	MODEL#	DOORTYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1 SECTION	SF1HC-1S	SOLID	1/3	30.1	33.5	77.8	120	1/3	5	23
2 SECTIONS	SF2HC-1S	SOLID	2/6	52	34.9	77.8	120	1/2	6	43

Depth measurement includes handles. For total height, add 6 inches for casters.

AVAILABLE DOORS

• Solid (one full-door)

EXTERIOR FINISHES

· Stainless steel doors and grille, with modern slate finish sides

INTERIOR FINISHES

· White coated steel walls with slate finish interior door

MOUNTING OPTIONS

• 6" casters (standard)









RI SERIES

Refrigerators



Designed to perform in high ambient conditions

3 year parts and labor warranty with an additional 4 year compressor part warranty

Made in USA

Compact design

to fit challenging kitchen layouts

Heavy Duty Construction

(2" CFC and HCFC-free foamed-in place polyurethane insulation)

Cartridge-style hinges

with 120 degree stay open feature

LED lighting standard

Self-closing doors

6" heavy duty casters standard


(3" casters or 6" leg option available at no charge when specified on order)

Uses environmentally friendly, energy efficient R290 refrigerant





FULL ELECTRONIC CONTROL with easy to read digital display



BUILT-IN LED LIGHTSImproved LED lighting for better product display

REFRIGERATORS (REACH-IN)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
	RI18HC	SOLID	1/4							
	RI18HC-HS	HALF SOLID	2/5							
1 SECTION	RI18HC-G	GLASS	1/4	27.25	29.25	69	115	1/4	5.5	16.85
	RI18HC-HG	HALF GLASS	2/5							
	RI18HC-HGS	HALF GLASS HALF SOLID	2/5							

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice

REFRIGERATORS (PASS-THRU)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1	RID18HC-HS	HALF SOLID	2/5	27.05	20.02	60	445	4/4		40.00
SECTION	RID18HC-HGS	HALF GLASS HALF SOLID	4/5	27.25	32.63	69	115	1/4	5.5	18.38

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice

AVAILABLE DOORS

- Solid (one full-door)
- Half Solid (two half-doors)
- Glass (one full-door)
- Half Glass (two half-doors)
- Half Glass, Half Solid (two half-doors)

EXTERIOR FINISHES

· Stainless steel

INTERIOR FINISHES

Stainless steel

AVAILABLE OPTIONS

Left hinge doors

AVAILABLE ACCESSORIES

- Additional shelves
- · Wire shelf divider
- · Bottle cartridge kit

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- · Flanged/seismic feet

AGENCY CERTIFICATIONS













Bottom Mount Reach-In Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING/ORGANIZERS		
Epoxy Coated Wire Shelf	RB/FB/HBR/HBF23	403-900D-02
Epoxy Coated Wire Shelf	RB/FB/HBR/HBF27	403-871D-02
Epoxy Coated Wire Shelf	RB/FB/HBR/HBF49	403-873D-02
Epoxy Coated Wire Shelf	RB/FB/HBR/HBF72	403-874D-02
Epoxy Coated Wire Shelf	SR1/SF1	100185005
Epoxy Coated Wire Shelf	SR2/SF2	100185306
Epoxy Coated Wire Shelf	RI18	403-207D
Shelf Clip	RB/FB/HBR/HBF	403-169A
Shelf Clip	Any Slate Units	100389004
Flat Wine Rack with Bottle Support	RB/HBR23	403-928D-04
Flat Wine Rack with Bottle Support	RB/HBR27	403-929D-04
Flat Wine Rack with Bottle Support	RB/HBR49	403-930D-04
Flat Wine Rack with Bottle Support	RB/HBR72	403-931D-04
Wire Divider	RI Series	403-719C

MOUNTING		
3" Caster Kit	RB/FB/HBR/HBF	61C01-018D-01
6" Caster Kit	RB/FB/HBR/HBF	61C01-014D-01
6" Seismic/Flanged Legs	RB/FB/HBR/HBF Series (set of four)	00C31-055A
6" Caster	Any Slate Units	100476036
6" Caster With Brake	Any Slate Units	100476037
3" Caster	RI Series	401-695B
3" Caster With Brake	RI Series	401-696B
6" Caster	RI Series	401-275A
6" Caster With Brake	RI Series	401-276A
6" Black Legs	RI Series	401-405A

ADDITIONAL ACCESSORIES		
Door Lock (at time of order)	RB/FB/HBR/HBF (SOLID DOORS)	401-274A

TRAY SLIDE KITS		
KIT #3 STAINLESS STEEL UNIVERSAL TR	AY SLIDE	
O DAIDC BER 4/2 CECTION	RB/FB/HBR/HBF 23	61C08-038A-02 (order 2)
8 PAIRS PER 1/2 SECTION	RB/FB/HBR/HBF 49	61C08-038A-01 (order 4)









WARMING CABINETS

KEEP FOOD WARM, FRESH, AND SAFE THROUGH THE PREP-TO-DELIVERY PROCESS



NEW! Horizon Series



P Series





HORIZON[®] SERIES

Warming Cabinets





Optimal airflow for consistent cabinet temperature

3 year parts and labor warranty

Made in USA

Adjustable Electronic Temp Control

From 80°F To 180°F

Built-In Adjustable Humidity Control Vent

Safety Shielded Strip Type Heating Elements

Externally Mounted Blower

Maintains Even Temperatures

Stainless Steel Front

With Gray Painted Galvanized Sides

Corrosion Resistant Aluminum Interior

Stainless Steel Breaker Caps

Snap-In Magnetic Door Gasket

Heavy-Duty Cam Lift Hinges

Stay-Open Door Feature

For Easy Product Loading

3 Heavy-Duty Epoxy Coated Shelves per section





FULL ELECTRONIC CONTROL

with easy to read digital display



FIELD-REVERSIBLE DOORS for flexibility to get your kitchen set up

for flexibility to get your kitchen set exactly how you want it


WARMING CABINETS

ADJUSTABLE ELECTRONIC TEMP CONTROL FROM 80°F TO 180°F

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	WATTS	AMPS	CUBIC FEET
1 SECTION	HH1-1S	SOLID	1/3	26	33.88	78.5	208- 240	1500	5.9 / 6.8	21.17
2 SECTIONS	HH2-1S	SOLID	2/6	52	33.88	78.5	208- 240	3000	11.3 / 13	45.04

Depth measurement includes handles. For total height, add 6 inches for casters.





Illustrated with the safety shield removed to give a good view of the heating element and vent.

AVAILABLE DOORS

• Solid (one full-door)

EXTERIOR FINISHES

· Stainless steel front with gray painted steel sides

INTERIOR FINISHES

· Corrosion resistant aluminum

AVAILABLE OPTIONS

· Left hinge doors

AVAILABLE ACCESSORIES

- Tray Slides
- · Additional shelves

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- · Flanged/seismic feet

AGENCY CERTIFICATIONS











P SERIES

Spec Line Warming Cabinets



Maximum resistance to wear and tear with stainless steel breaker caps and door liners

Modular interior gives maximum flexibility for shelf and slide combinations

3 Year parts and labor warranty

Stainless steel breakers

Full electronic control

Self-closing doors

with 120° stay-open feature, on cam-lift hinges

Built-in adjustable humidity control

Door locks standard

for both Solid and Glass doors

Magnetic gasket attached to each door

for positive seal

6" adjustable legs

(3" casters or 6" caster option available at no charge when specified on order)

3 chrome-plated wire shelves

per section

Removable access panel

for ease of service and maintenance

Temperature range from 80-180° F



AVAILABLE DOORS

- Solid (one full-door)
- Half Solid (two half-doors)
- Glass (one full-door)
- Half Glass (two half-doors)





TRAY SLIDES A AVAILABLE holds one 18x26" or two 14x18"



TRAY SLIDES A/C AVAILABLE hold one 18x26", or two 14x18", or two 12x20"

EXTERIOR FINISHES

· Stainless steel

INTERIOR FINISHES

- · Corrosion-resistant aluminum
- · Stainless steel

AVAILABLE OPTIONS

· Left hinge doors

AVAILABLE ACCESSORIES

- · Additional shelves
- · Tray slide kits (reach-in & pass-thru only)
- · Stainless steel shelves
- · Kick plate

MOUNTING OPTIONS

- 6" legs (standard)
- 6" casters
- 3" casters
- · Flanged/seismic feet

AGENCY CERTIFICATIONS





1, 2, AND 3 SECTION MODELS AVAILABLE IN REACH-IN, PASS-THRU, ROLL-IN, ROLL-THRU, AND EXTRA-TALL







P SERIES

WARMING CABINETS - REACH IN

TEMPERATURE RANGE FROM 80-180° F

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	WATTS	AMPS	CUBIC FEET
	PH1-1S	SOLID	1/3	26.50	35	77.75	208-240	1500	6.3	21.5
1	PH1-1HS	HALF SOLID	2/3	26.50	35	77.75	208-240	1500	6.3	21.5
SECTION	PH1-1BG	GLASS	1/3	26.50	33.38	77.75	208-240	1500	6.3	21.5
	PH1-1BHG	HALF GLASS	2/3	26.50	33.38	77.75	208-240	1500	6.3	21.5
	PH2-1S	SOLID	2/6	52.13	35	77.75	208-240	3000	13	46.5
2	PH2-1HS	HALF SOLID	4/6	52.13	35	77.75	208-240	3000	13	46.5
SECTIONS	PH2-1BG	GLASS	2/6	52.13	33.38	77.75	208-240	3000	13	46.5
	PH2-1BHG	HALF GLASS	4/6	52.13	33.38	77.75	208-240	3000	13	46.5

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

WARMING CABINETS - PASS-THRU

TEMPERATURE RANGE FROM 80-180° F

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	WATTS	AMPS	CUBIC FEET
	PH1-1S-PT	SOLID	2/3	26.50	38.38	77.75	208-240	1500	6.3	21.5
1	PH1-1HS-PT	HALF SOLID	4/3	26.50	38.38	77.75	208-240	1500	6.3	21.5
SECTION	PH1-1BG-PT	GLASS	2/3	26.50	35.88	77.75	208-240	1500	6.3	21.5
	PH1-1BHG-PT	HALF GLASS	4/3	26.50	35.88	77.75	208-240	1500	6.3	21.5
	PH2-1S-PT	SOLID	4/6	52.13	38.38	77.75	208-240	3000	13	46.5
2	PH2-1HS-PT	HALF SOLID	8/6	52.13	38.38	77.75	208-240	3000	13	46.5
SECTIONS	PH2-1BG-PT	GLASS	4/6	52.13	35.88	77.75	208-240	3000	13	46.5
	PH2-1BHG-PT	HALF GLASS	8/6	52.13	35.88	77.75	208-240	3000	13	46.5

 $Depth\ measurement\ includes\ handles.\ For\ total\ height,\ add\ 3\ or\ 6\ inches,\ based\ on\ your\ mounting\ choice.$

WARMING CABINETS - ROLL-THRU

TEMPERATURE RANGE FROM 80-180° F

SECTIONS	MODEL#	DOOR TYPE	DOORS	WIDTH	DEPTH	HEIGHT	VOLTS	WATTS	AMPS	CUBIC FEET
1	PHI1-1S-PT	COLID	2	36 F	20.00	84.38	200.240	1500	6.3	22.6
SECTION	PHI1XT-1S-PT	SOLID	2	36.5	39.88	89.88	208-240	1500	6.3	33.6
2	PHI2-1S-PT	COLUD	4	CO 00	20.00	84.38	200 240	2000	40	70.4
2 SECTIONS	PHI2XT-1S-PT	SOLID	4	68.88	39.88	89.88	208-240	3000	13	72.4

Depth measurement includes handles.

WARMING CABINETS - ROLL-IN

TEMPERATURE RANGE FROM 80-180° F

SECTIONS	MODEL#	DOOR TYPE	DOORS	WIDTH	DEPTH	HEIGHT	VOLTS	WATTS	AMPS	CUBIC FEET
1	PHI1-1S	COLID	4	26 E	36.5 36.13		208-240	1500	6.3	33.6
SECTION	PHI1XT-1S	SOLID	Į.	30.3	30.13	89.88	200-240	1500	0.3	33.0
2	PHI2-1S	COLID	2	CO 00	68.88 36.13	84.38	208-240	3000	13	72.4
SECTIONS	PHI2XT-1S	SOLID	2	68.88		89.88				72.4

Depth measurement includes handles.







Warming Cabinet Accessories

DESCRIPTION	ESCRIPTION UNIT(S)							
SHELVING/ORGANIZERS								
Epoxy Coated Wire Shelf	H Series Flat Shelving 1 Door Unit	403-889D-01						
Epoxy Coated Wire Shelf	H Series Flat Shelving 2 Door Unit	403-887D-01						
Epoxy Coated Wire Shelf	P Series, 1 section	50597706						
Epoxy Coated Wire Shelf	P Series, 2 section or 3 section (left or right)	50597806						
Epoxy Coated Wire Shelf	P Series, 3 section (center)	50597906						
Shelf Clip	Any H Series Unit	403-169A						
Shelf Clip	P Series	50022601						

MOUNTING		
6" Caster (set of four)	Any H Series Unit	61C01-001A
3" Caster (set of four)	Any H Series Unit	61C01-013A
6" Black Leg (set of four)	Any H Series Unit	58B02-001A
6" Seismic/Flanged Legs (set of four)	Any H Series Unit	00C31-055A
6" Casters (set of four)	P Series	0-0140-105S
3" Casters (set of four)	P Series	0-0140-103S
6" Seismic/Flanged Legs (set of four)	P Series	00C26-028A

ADDITIONAL ACCESSORIES					
Door lock	P Series	50597111			



Tray Slides

UNIT(S) PART NUMBER DESCRIPTION

INDIVIDUAL TRAY SLIDES

1 pair of type "A" tray slides	H-Series / P-Series	10601211		
	Bot	14x18" pans		
	SPACING	2"	011	411
	SPACING	2	3"	4"
	Full Door	26	18	13

1 pair of type "A/C" tray slides	H-Series	10601201\$					
	<i>"</i>	Bottom support for (1) 18x26" pan, or (2) 14x18" p					
	SPACING	2"	3"	4"			
	Full Door	26	18	13			
Pilaster and mounting hardware not included.	Half Door	12	8	6			







GLASS DOOR MERCHANDISERS

CONSISTENT COOLING POWER WITH WELL LIT PRODUCT DISPLAY



Marketeer® Series



MarketMax Series





Novelty & Dipping Cabinets





MARKETEER® SERIES

Refrigerators & Freezers



NEW SIZES AVAILABLE

Energy Star rated (select models)

Unique sizing options

3 year parts and labor warranty with an additional 4 year compressor part warranty

Triple pane Low-E argon-filled glass doors on freezers; Double pane on refrigerators

LED lighting

creates dynamic product presentation

Refrigerators have electro-mechanical control

Freezers have full electronic control

Energy efficient and environmentally friendly R290 refrigerant

(except for 1H6 models, which use R600)

Energy Star rated

(select models)

Self-closing hinged doors

with mechanical locks standard (except MT06, MT21, MT41)

Sliding glass doors available

on select units

NEW! Bottle Coolers now available (MT41)



MECHANICAL LOCKS standard on all hinged units (excluding MT21 models)



BUILT-IN LED LIGHTS for dynamic product presentation

REFRIGERATORS

	SECTIONS	MODEL#	DOOR Type	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
	1 DOOR	MT08-1H6B MT08-1H6W	HINGED	1/5	18.88	20.63	71.38	115	1/8	1.8	7.69	BLACK WHITE
NEW	1 DOOR	MT06-1H6B	HINGED	1/3	21.25	27.75	36.25	115	1/8	2.5	5.0	BLACK
	1 DOOR	MT10-1B MT10-1W	HINGED	1/3	24.88	22.5	54.38	115	1/6	3.2	9.43	BLACK WHITE
	1 DOOR	MT12-1B MT12-1W	HINGED	1/4	24.88	22.81	63.63	115	1/6	4.1	11.5	BLACK WHITE
	1 DOOR	MT23-1B MT23-1W	HINGED	1/5	29.56	26.13	78.63	115	1/3	7	19.2	BLACK WHITE
	2 CURVED Doors	MT21-1B MT21-1W	HINGED	2/10	36.13	24.5	57.5	115	1/3	3.6	16.8	BLACK WHITE
	2 DOORS	MT34-1B MT34-1W	HINGED	2/10	39.5	27.5	79	115	1/3	7.6	26.12	BLACK WHITE
NEW	2 DOORS	MT41-48-1-SDB	SLIDING	2/6	47.25	21.75	48.13	115	1/4	3.1	16.4	BLACK
NEW	2 DOORS	MT41-54-1-SDB	SLIDING	2/6	47.25	21.75	54.13	115	1/4	3.1	19.5	BLACK
	2 DOORS	MT49-1B MT49-1W	HINGED	2/10	47.13	30.13	79	115	1/2	8.3	37.42	BLACK WHITE
	2 DOOKS	MT49-1-SDB MT49-1-SDW *	SLIDING	2/10	47.13	30.13	78.63	115	1/2	8.3	39.03	BLACK WHITE
	2 DOORS	MT53-1B MT53-1W	HINGED	2/10	54.25	29.38	79	115	1/2	8.3	41.66	BLACK WHITE
	2 DOORS	MT53-1-SDB MT53-1-SDW*	SLIDING	2/10	54.25	29.38	78.63	115	1/2	8.7	41.66	BLACK WHITE
NEW	3 DOORS	MT72-1B	HINGED	3/15	78.75	33.63	79.38	115	2X 1/2	13.6	66.3	BLACK

^{*} Sliding glass doors and door frames are black on black exterior and white exterior units. / Depth measurement includes handles.

FREEZERS

SECTIONS	MODEL#	DOOR Type	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
NEW 1 DOOR	MTF12-1B	HINGED	1/4	24.88	22.81	63.63	115	1/2	5.1	11.5	BLACK
NEW 1 DOOR	MTF23-1B	HINGED	1/5	30.13	30.88	78.75	115	3/4	7.0	20.24	BLACK
NEW 2 DOORS	MTF53-1B	HINGED	2/10	54.3	31.3	78.9	115	(2) 1/2	11.2	42.97	BLACK

Depth measurement includes handles.

EXTERIOR FINISHES

- Black
- White (not available on MTF's)

INTERIOR FINISHES

White

AVAILABLE ACCESSORIES

- Visislide shelving kit
- Extra shelves & clips
- 3" Casters
- 2" Leveling Legs

AVAILABLE DOORS

- Hinged
- Sliding door

AGENCY CERTIFICATIONS













MARKETMAX® SERIES

Refrigerators & Freezers



Energy efficient R290 provides solution for all environmental concerns

Designed to perform in high ambient conditions

Made in USA

Double pane, lowE argon-filled glass doors

Freezers have triple pane

Field-reversible (refrigerator only)

Requires additional hardware kit

Self-closing doors

120° stay open feature

LED lighting

creates dynamic product presentation

Brightly lit sign panel

Custom door decals and signage available

Full electronic temperature control

Energy efficient and environmentally friendly R290 refrigerant

5 epoxy coated wire shelves per section

1, 2 & 3 door model options available

Sliding glass doors available on select units



AVAILABLE DOORS

- Hinged
- Sliding door







FULL ELECTRONIC CONTROL with easy to read digital display



BRIGHTLY LIT HEADER PANEL to grab attention and increase sales

EXTERIOR FINISHES

- Black
- White
- · Stainless steel

INTERIOR FINISHES

- Black
- White
- · Stainless steel

AVAILABLE OPTIONS

- · Left hinge doors
- · Remote models available
- · Header signs

AVAILABLE ACCESSORIES

- Electronic locks
- · Dual-temp models
- Wine models
- Door locks
- Gravity-Flo kits
- · Price-tag molding
- Custom graphics
- · Field-reversible door kit (refrigerators only)

MOUNTING OPTIONS

- 6" casters
- 6" legs
- 3" casters

AGENCY CERTIFICATIONS



1, 2, AND 3 SECTION MODELS AVAILABLE







MARKETMAX®

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL# Black	MODEL# WHITE	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1	MMR12HC-1-B	MMR12HC-1-W	HINGED	1/4	24.13	25.75	62	115	1/6	2	12.06
1	MMR19HC-1-B	MMR19HC-1-W	HINGED	1/5	27.25	27.5	78	115	1/4	3	17.87
1	MMR23HC-1-B	MMR23HC-1-W	HINGED	1/5	27	33.63	78	115	1/4	3	23.1
1	MMR27HC-1-B	MMR27HC-1-W	HINGED	1/5	30	33.63	78	115	1/4	3	25.88
2	MMR35HC-1-B	MMR35HC-1-W	HINGED	2/10	39.5	33.5	78	115	1/4	2.4	36.87
2	MMR38HC-1-B	MMR38HC-1-W	SLIDING	2/10	43.5	32.25	78	115	1/3	5.4	35.37
2	MMR44HC-1-B	MMR44HC-1-W	HINGED	2/10	47	33.63	78	115	1/3	5.4	40.2
2	MMR45HC-1-B	MMR45HC-1-W	SLIDING	2/10	52	32.25	78	115	1/3	5.4	44
2	MMR49HC-1-B	MMR49HC-1-W	HINGED	2/10	52	33.63	78	115	1/3	5.4	46.15
3	MMR66HC-1-B	MMR66HC-1-W	SLIDING	3/15	75	32.25	78	115	1/2	6.2	64.4
3	MMR72HC-1-B	MMR72HC-1-W	HINGED	3/15	75	33.63	78	115	1/2	6.2	68.5

Depth measurement includes handles.

FREEZERS

UTILIZES EXPANSION VALVE TECHNOLOGY TO MAINTAIN TEMPERATURE OF 0° TO -10°F.

SECTIONS	MODEL# BLACK	MODEL# WHITE	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1	MMF12HC-1-B	MMF12HC-1-W	HINGED	1/4	24.13	25.75	62	115	1/2	5	11.9
1	ммғ19нс-1-в	MMF19HC-1-W	HINGED	1/5	27.25	27.5	78	115	3/4	7.5	17.87
1	MMF23HC-1-B	MMF23HC-1-W	HINGED	1/5	27	33.63	78	115	3/4	7.5	22.5
1	MMF27HC-1-B	MMF27HC-1-W	HINGED	1/5	30	33.63	78	115	3/4	7.5	26.57
2	MMF35HC-1-B	MMF35HC-1-W	HINGED	2/10	39.5	33.5	78	115	3/4	11	36.87
2	ММҒ44НС-1-В	MMF44HC-1-W	HINGED	2/10	47	33.63	78	115	3/4	11	44
2	ММҒ49НС-1-В	MMF49HC-1-W	HINGED	2/10	52	33.63	78	115	3/4	11	46.2
3	ММF72HC-5-В	MMF72HC-5-W	HINGED	3/15	75	33.63	78	230*	3/4 (X2)	14	68.5

*Freezers powered by 115/208-230 volts are designed for field wiring (requires 4-wire electrical circuit, hard-wired).

Depth measurement includes handles.

DUAL-TEMPS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F (REFRIGERATOR), AND -10°F (FREEZER).

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
2	MMRF49HC-1-A-BW	UINCED	2/10	52	33.63	78	115 (X2)	R: 1/4	R: 2.4	R: 21.01	BLACK
	MMRF49HC-1-A-WW	HINGED	2/10	32	33.03	78	115 (X2)	F: 3/4	F: 7.5	F: 21.01	WHITE
2	MMRR49HC-1-A-BW	HINGED	2/10	52	33.63	78	115 (X2)	R: 1/4	R: 2.4	R: 21.01	BLACK
2	MMRR49HC-1-A-WW	HINGED	2/10	32	33.03	76	115 (X2)	R: 1/4	R: 2.4	R: 21.01	WHITE
3	MMRF72HC-1-B-BW	HINGED	2/45	75	33.63	78	115 (X2)	R: 1/4	R: 2.4	R: 19.62	BLACK
3	MMRF72HC-1-B-WW	HINGED	3/15	/5	33.03	78	115 (X2)	F: 1	F:11	F: 44.85	WHITE
2	MMRR72HC-1-B-BW	HINCED	3/15	75	33.63	70	115 (X2)	R: 1/4 R: 1/4	R: 2.4 R: 2.4	R: 19.62	BLACK
3	MMRR72HC-1-B-WW	HINGED				78				R: 44.85	WHITE

*Freezers powered by 115/208-230 volts are designed for field wiring (requires 4-wire electrical circuit, hard-wired).

Depth measurement includes handles.

All options for MarketMax Dual Temps are specified within the model number using the designated codes described below.

MMRF49HC EXAMPLE

Customer orders a MMRF49HC-1-A-BW

- · Exterior will be black. Interior of the freezer AND the refrigerator will be white. (BW)
- · The refrigerator will be on the LEFT with Left hinged door. The freezer will be on the RIGHT with Right hinged door. (RF)

MM (F	RF, FR) 49 - COOLER CONFIGURATIONS								
SINGL	SINGLE DOOR ON LEFT - SINGLE DOOR ON RIGHT								
FR	Freezer on the Left with Left Hinged Door, Refrigerator on the Right with Right Hinged Door								
RF	Refrigerator on the Left with Left Hinged Door, Freezer on the Right with Right Hinged Door								
RR	One Refrigerator on the Left, second Refrigerator on Right								
SPECI	AL DOOR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER								
-18	All Left Hinged Doors								
-015	All Right Hinged Doors								

COLO	R COMBINATIONS
(вотн	CABINET INTERIORS BEING THE SAME COLOR)
BW	Black Exterior / White Interior
ww	White Exterior / White Interior
sw	Stainless Exterior / White Interior
BB	Black Exterior / Black Interior
BS	Black Exterior / Stainless Interior
WB	White Exterior / Black Interior
ws	White Exterior / Stainless Interior
SS	Stainless Exterior / Stainless Interior
SB	Stainless Exterior / Black Interior

MMRF72 EXAMPLE

Customer orders a MMRF72HC-1-B-WW

- · Exterior will be white. Interior of the freezer AND the refrigerators will also be white. (WW)
- The refrigerator will be on the left and freezer will be on the right (RF)
- . Single section on the left, and double section on the right (B)

MM (RF, FR) 72 - COOLER CONFIGURATIONS											
Refrigerator/Freezer Location											
FR	Freezer on the Left, Refrigerator on the right										
RF	Refrigerator on the Left, Freezer on the right										
RR	One Refrigerator on the Left, second Refrigerator on Right										
Door (Configuration										
В	Single section on left, Double section on right										
C	Double section on left, Single section on right										

B DOO	OR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER
	Standard - Single section on the Left with Left Hinged Door, 2 Door Section on the Right with Left/Right Hinged Doors
-282	Single section on the Left with Left Hinged Door, 2 Door Section on the Right with 2 Right Hinged Doors
-18	Single section on the Left with Left Hinged Door, 2 Door Section on the Right with 2 Left Hinged Doors
-015	Single section on the Left with Right Hinged Door, 2 Door Section on the Right with 2 Right Hinged Doors

C D00	R OPENINGS - ADD NUMBER TO END OF MODEL NUMBER
	Standard - 2 Door Section on the Left with Left/Right Hinged Doors, Single Door Section on the Right with Right Hinged Door
-18	2 Door Section on the Left with 2 Left Hinged Doors, Single Door Section on the Right with Left Hinged Door
-015	2 Door Section on the Left with 2 Right Hinged Doors, Single Door Section on the Right with Right Hinged Door
-103	2 Door Section on the Left with 2 Left Hinged Doors, Single Door Section on the Right with Right Hinged Door





MARKETMAX® IQ

Merchandisers with Electronic Smart Lock Feature



Keeps unattended merchandisers secure in your micro-market

Designed to perform in high ambient conditions

Made in USA

Sleek design

NAMA certified, UL & NSF compliant

Secures temperature-sensitive products for worry-free operation

Automatically locks when power loss or temperature drop is sensed

Unlocks automatically if outage is less than 30 minutes

LED indicator to quickly view status

Flashes to indicate if protection event occurs

Easy-access test switch for health inspectors

Built-in safety feature allows escape in case of accidental lock-in

Optional features such as remote monitoring, fault alerts, and remote unlocking can be added using **FreshTrag.com**



Detects power loss or temperature failure, and automatically locks the unit.

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORTYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
	MMR12HC-1-B-IQ	HINGED	1/4	24.125*	25.75	62	115	1/6	2	12.06	BLACK
•	MMR12HC-1-W-IQ	HINGED	1/4	24.125	23.73	UZ.	113	1/0		12.00	WHITE
1	MMR23HC-1-B-IQ	HINGED	1/5	27*	33.63	78	115	1/4	3	23.1	BLACK
•	MMR23HC-1-W-IQ	HINGED	1/3	21	33.03	70		1/4	J		WHITE
4	MMR27HC-1-B-IQ	UINCED	1/5	30*	33.63	78	115	1/4	3	25.88	BLACK
'	MMR27HC-1-W-IQ	HINGED	1/5	30		76					WHITE
2	MMR44HC-1-B-IQ	HINGED	2/10	47	33.63	70	115	1/2	5.4	40.2	BLACK
	MMR44HC-1-W-IQ	пінцер	2/10	47	33.03	78	115	1/3	5.4	40.2	WHITE
	MMR49HC-1-B-IQ	HINCED	2/10	F2	22.62	70	445	1/2	F 4	46.45	BLACK
2	MMR49HC-1-W-IQ	HINGED	2/10	52	33.63	78	115	1/3	5.4	46.15	WHITE

^{*}The IQ locks on single door units are external and will add 1 inch to the overall width shown above.

Depth measurement includes handles.

FREEZERS

UTILIZES EXPANSION VALVE TECHNOLOGY TO MAINTAIN TEMPERATURE OF 0° TO -10°F.

SECTIONS	MODEL#	DOOR TYPE	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
1	MMF12HC-1-B-IQ	HINGED	1/4	24.125*	25.75	62	115	1/2	5	11.9	BLACK
•	MMF12HC-1-W-IQ	HINGED	1/4	24.123	23.73	UZ		1/2		11.5	WHITE
1	MMF23HC-1-B-IQ	HINGED	1/5	27*	33.63	78	115	3/4	7.5	22.5	BLACK
	MMF23HC-1-W-IQ	HINGED	1/3	21	33.03	70		3/4	7.5	22.5	WHITE
1	MMF27HC-1-B-IQ	HINGED	1/5	30*	33.63	78	115	3/4	7.5	26.57	BLACK
'	MMF27HC-1-W-IQ				33.03	70	115	3/4			WHITE
2	MMF44HC-1-B-IQ	HINGED	2/10	47	33.63	70	115	2/4	44	44	BLACK
2	MMF44HC-1-W-IQ	HINGED	2/10	4/	33.03	78	115	3/4	11	44	WHITE
	MMF49HC-1-B-IQ	LUNCED	2/10	F2	22.62	70	445	2/4	44	46.0	BLACK
2	MMF49HC-1-W-IQ	HINGED	2/10	52	33.63	78	115	3/4	11	46.2	WHITE

^{*}The IQ locks on single door units are external and will add 1 inch to the overall width shown above.

Depth measurement includes handles.

AVAILABLE DOORS

- Hinged
- · Sliding door

EXTERIOR FINISHES

- Black
- White
- Stainless steel

INTERIOR FINISHES

- Black
- White
- Stainless steel

AVAILABLE OPTIONS

- · Remote models available
- Header signs

AVAILABLE ACCESSORIES

- Electronic locks
- · Dual-temp models
- Wine models
- · Gravity-Flo kits
- · Price-tag molding
- · Custom graphics

MOUNTING OPTIONS

- · 6" casters
- 6" legs
- 3" casters

AGENCY CERTIFICATIONS








MARKETMAX® WINE UNITS



The MarketMax wine units have the same great MarketMax features, with wine-specific options to create the ultimate wine merchandiser.

SHELVING UPGRADES

We offer curved and flat wine racks, designed to secure the bottles while keeping them prominently on display. Available in white, black, and chrome finish.



MarketMax

with upgrades

wine unit

BASE UNIT

WINE OPTION UPGRADES

WINE REFRIGERATORS







UNIT MODEL # (BLACK EXTERIOR -B)			н	FLAT RACK	CURVED SHELF		
MMR23HC-1-B-WINE	27 33.63 78		78	403-933D	412-076D	409-418C-065	409-418C-064
MMR27HC-1-B-WINE	30	33.63	78	403-934D	412-078D	409-419C-150	409-419C-149
MMR44HC-1-B-WINE	B-WINE 47 33.63 78		412-070D	412-074D	409-421C-080	409-4210-079	
MMR49HC-1-B-WINE	MMR49HC-1-B-WINE 52 33.63 78		403-936D	412-077D	409-422C-121	409-422C-120	
MMR72HC-1-B-WINE	75	33.63	78	412-071D	412-073D	409-423C-070	409-423C-069

Depth measurement includes handles.

DUAL-TEMP WINE REFRIGERATORS

Add your shelf color choice to the end of the shelf model # -01 for white; -02 for black; -04 for chrome finish example: 412-078D-04

SHELVING



SIGNAGE



UNIT MODEL#	W	D	н	FLAT RACK	CURVED SHELF		
MMRR49HC-1-A-BW-WINE 52 33.63 78		412-072D	412-075D	409-422C-121	409-422C-120		
MMRR72HC-1-B-BW-WINE	75	33.63	78	412-071D (double section) 412-070D (single section)	412-073D (double section) 412-074D (single section)	409-423C-070	409-423C-069

Add your shelf color choice to the end of the shelf model # Depth measurement includes handles. -01 for white; -02 for black; -04 for chrome finish example: 412-075D-01

CONTROLLER

Easily programmed to keep unit and its contents at the necessary set point (between 35-62° F)

To have your controller pre-programmed for white wines, change the WINE in the unit model number to WWINE; for red wines, change it to RWINE.



FINISHES

MarketMax exterior is standard black with optional white or stainless steel.

MarketMax interior is standard white with optional black or stainless steel.













COUNTERTOPS

Refrigerators & Freezers



MT06 Refrigerator NEW COUNTERTOP UNIT

Triple pane, Low-E argon-filled glass doors

Self-closing hinged door features pocket door handle

Refrigerators have electro-mechanical temperature control

LED lighting

creates dynamic product presentation

Automatic, electric defrost

Freezers have full electronic control

R600 refrigerant

Energy Star rated

(select models)

3 year parts & labor warranty/ additional 4 year compressor warranty

AGENCY CERTIFICATIONS





CT96 Refrigerator

Double pane, tempered glass door with locks

Heavy-duty black textured steel exterior

with black plastic door frames

Heavy-duty white epoxy coated steel interior

LED lighting

creates dynamic product presentation

3 epoxy coated shelves

top 2 shelves are adjustable

Full electronic temperature control with display

Refrigeration system uses R600a refrigerant

to comply with all environmental concerns

System is serviceable from the rear

Custom graphics available

1 year parts & labor warranty

AGENCY CERTIFICATIONS





REFRIGERATORS

MODEL#	DOORS/ SHELVES	VOLTS	НР	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	EXTERIOR COLOR	INTERIOR COLOR
МТ06-1Н6В	1/3	115	1/8	2.5	5	21.25	27.75	36.25	BLACK	WHITE
СТ96НС-1-В	1/3	115	1/5	1.3	5.9	21.38	25.5	37.5	BLACK	WHITE

Depth measurement includes handles. Height measurement includes mounting height.



CF3 Freezer

Triple pane, tempered glass door

Pre-painted steel interior and exterior for easy cleaning

LED lighting

creates dynamic product presentation

2 shelves standard

one full & one half shelf

Custom graphics available

AGENCY CERTIFICATIONS



2" leveling legs

with up to 1" for leveling of the unit

Refrigeration system uses R290 refrigerant

to comply with all environmental concerns

1 year parts & labor warranty



UCF20 Freezer

Glass door provides clear merchandising of ice cream

Oversized refrigeration system holds -15°F product temperature

Full electronic control

for enhanced defrost



AGENCY CERTIFICATIONS







Forced air design does not require unit to undergo manual defrost

which is a major advantage to comparable cold wall freezers

20" footprint for countertop

or undercounter applications

3 year parts and labor warranty/ additional 4 year compressor warranty

FREEZERS

MODEL#	DOORS/ SHELVES	VOLTS	НР	AMPS	CUBIC FEET	WIDTH	DEPTH	HEIGHT	COLOR	OPERATING TEMPERATURE
CF3HC-1-W	1/2	115	1/4	4	4	23.75	22.5	28.5	WHITE	-10° F
UCF20HC-25-15	1/2	115	1/2	3.65	2.25	20	24.5	31.13	STAINLESS	-10 to -15° F

Depth measurement includes handles.

Energy efficient refrigerant provides solution for all environmental concerns Designed to perform in high ambient conditions





DIPPING CABINETS



R290 refrigerant provides low energy consumption and is environmentally friendly

3 year parts and labor warranty with an additional 4 year compressor part warranty

Galvanized metal cabinet

with powder coated painted surface

Easy-to-clean interior

Full electronic control

Sliding glass lids are LowE tempered

Lock and keys standard

2" Heavy-duty casters

allow easy and fast movement

Drain plug for easy cleaning

Lexan sneeze guard

Heavy-duty PVC coated wire support racks

allows containers to be placed on top level for optimal storage

Each rack designed to hold

multiple 3-gallon ice cream containers

R290 refrigerant provides low energy consumption and is environmentally friendly



LID LOCKS STANDARD for loss prevention



LED LIGHTING for dynamic product presentation

DIPPING CABINETS

COLD WALL SYSTEM MAINTAINS TEMPERATURES OF 0 to -10°F.

MODEL#	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
BDC-HC-8	50.4	26.4	52	120	1/3	5.4	15.2	White
BDC-HC-12	68.2	26.4	52	120	1/3	5.2	20.9	White

Depth measurement includes handles. For total height, add 2 inches for the caster height.

BDC-HC-8 Capacity

Top rack: eight 3-gallon ice cream containers Bottom rack: six 3-gallon ice cream containers

BDC-HC-12 Capacity

Top rack: twelve 3-gallon ice cream containers Bottom rack: ten 3-gallon ice cream containers



EXTERIOR FINISHES

White

INTERIOR FINISHES

White

ACCESS OPTIONS

Glass lids

MOUNTING OPTIONS

• 2" casters (standard)

AVAILABLE ACCESSORIES

• Custom graphics

AGENCY CERTIFICATIONS







NOVELTY CASES



R290 refrigerant provides low energy consumption and is environmentally friendly

3 year parts and labor warranty with an additional 4 year compressor part warranty

White coated steel exterior

White powder coated surface interior

R290 refrigerant provides low energy consumption

LED lighting

Adjustable thermostat

Operating temperature of -10°F

Angle top design with LowE tempered glass lids

Lids are easily removable

Lid lock & keys

Round exterior edges

Integrated tag molding

2" heavy duty casters

Drain plug for easy cleaning

Removable baskets



LID LOCKS STANDARD for loss prevention



LED LIGHTING for dynamic product presentation

NOVELTY CASES

MAINTAINS TEMPERATURES OF -10°F.

MODEL#	LIDS/BASKETS	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
NC28HC-1-W	2/2	28.1	26.4	32.2	115	1/5	3	4.31	White
NC34HC-1-W	2/3	34.1	26.4	32.2	115	1/4	3	5.67	White
NC43HC-1-W	2/4	42.7	26.4	32.2	115	1/4	3.5	7.63	White
NC51HC-1-W	2/5	50.6	26.4	32.2	115	1/4	3.5	9.43	White
NC60HC-1-W	2/6	60.4	26.4	34.2	115	1/3	4	11.66	White
NC68HC-1-W	2/7	68.3	26.4	34.2	115	1/3	4	21	White

Depth measurement includes handles. For total height, add 2 inches for the caster height.



EXTERIOR FINISHES

White

INTERIOR FINISHES

White

ACCESS OPTIONS

Glass lids

MOUNTING OPTIONS

• 2" casters (standard)

AVAILABLE ACCESSORIES

- Custom graphics
- · Dip well

AGENCY CERTIFICATIONS







Glass Door Merchandiser Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING / ORGANIZERS		
Epoxy Coated Wire Shelf	MMR/MMF23	403-900D-01
Epoxy Coated Wire Shelf	MMR/MMF27	403-871D-01
Epoxy Coated Wire Shelf	MMR/MMF49	403-873D-01
Epoxy Coated Wire Shelf	MMR/MMF72	403-874D-01
Epoxy Coated Wire Shelf, Black	MMR/MMF23	403-900D-03
Epoxy Coated Wire Shelf, Black	MMR/MMF27	403-871D-03
Epoxy Coated Wire Shelf, Black	MMR/MMF49	403-873D-03
Epoxy Coated Wire Shelf, Black	MMR/MMF72	403-874D-03
Wire Shelf	СТ96	CT9652
FLAT Wine Rack	MMR23	403-933D =
FLAT Wine Rack	MMR27	403-934D
FLAT Wine Rack	MMR44	412-070D
FLAT Wine Rack	MMR49	403-936D
FLAT Wine Rack	MMR72	412-071D
FLAT Wine Rack	MMRR49	412-072D
FLAT Wine Rack	MMRR72	412-071D (double section) 412-070D (single section)
CURVED Wine Rack	MMR23	412-076D
CURVED Wine Rack	MMR27	412-078D
CURVED Wine Rack	MMR44	412-074D
CURVED Wine Rack	MMR49	412-077D
CURVED Wine Rack	MMR72	412-073D
CURVED Wine Rack	MMRR49	412-072D
CURVED Wine Rack	MMRR72	412-073D (double section) 412-074D (single section)
Shelf Clip	MMR/MMF Series	403-169A
Novelty Basket (White)	All MMF models	403-941D-01
Novelty Basket (Black)	All MMF models	403-941D-02
Shelf Clip	СТ96	CT9651
Gravity Flo Kits (5 shelves for 1 section)	MM23	61C31-253D-01
Gravity Flo Kits (5 shelves for 1 section)	MM27	61C31-193A-01
Gravity Flo Kits (5 shelves for 1 section)	MM44	61C31-201A-01 (order 2)
Gravity Flo Kits (5 shelves for 1 section)	MM49/72	61C31-199A-01 order 2 for MM49 order 3 for MM72
MOUNTING	·	
3" Casters	MT Series (set of four)	61C01-011A
2" Leveling Feet	MT Series (set of four)	2016557
6" Seismic/Flanged Legs	MMR/MMF Series (set of four)	00C31-055A
ADDITIONAL ACCESSORIES		

Designate shelf color by adding one of these to the part number:

- -01 White -02 Black -04 Chrome Finish
- ex. 412-078D-02

DESCRIPTION	UNIT(S)	PART NUMBER
SIGNAGE		
Price Tag Molding (per shelf)	MMR/F 23, 45/49, 66/72	61A32-082D-01
Price Tag Molding (per shelf)	MMR/F 27	61A32-090D-02
Price tag strips (5 p/kit)	MT08-1H6	2039785
Price tag strips (5 p/kit)	MT10-1	2039789
Price tag strips (5 p/kit)	MT23-1	2039787
Price tag strips (10 p/kit)	MT34-1	2082716
Price tag strips (10 p/kit)	MT49-1	2082715
Price tag strips (5 p/kit)	MT53-1	2030792
Brushed sign 26-3/8" x 8.5"	MMR23/MMF23	409-505B-01
Brushed sign 29 1/8" x 8.5"	MMR27/MMF27	409-505B-02
Brushed sign 46.13" W x 8.5"	MMR44/MMF44	409-505B-04
Brushed sign 51 1/8" x 8.5"	MMR/MMF49	409-505B-05
Brushed sign 74 1/4" x 8.5"	MMR/MMF72	409-505B-06
Flat Black Sign	MMR23/MMF23	409-488B-01
Flat Black Sign	MMR/MMF27	409-488B-02
Flat Black Sign	MMR/MMF49	409-488B-05
Flat Black Sign	MMR/MMF72	409-488B-06
Flat White Sign	MMR23/MMF23	409-418C-053
Flat White Sign	MMR/MMF27	409-419C-140
Flat White Sign	MMR/MMF49	409-413C-140 409-422C-109
		409-423C-061
Flat White Sign	MMR/MMF72	
Self-Serve Sign	MMR23/MMF23	409-418C-054
Self-Serve Sign	MMR/MMF27	409-419C-141
Self-Serve Sign	MMR/MMF49/MMRF49	409-422C-110
Self-Serve Sign	MMR/MMF72/MMRF72	409-423C-062
Fresh Foods Sign	MMR23/MMF23	409-418C-056
Fresh Foods Sign	MMR/MMF27	409-419C-143
Fresh Foods Sign	MMR/MMF49	409-422C-112
Fresh Foods Sign	MMR/MMF72	409-423C-064
Cold Drinks Sign	MMR23	409-418C-055
Cold Drinks Sign	MMR27	409-419C-142
Cold Drinks Sign	MMR49	409-422C-111
Cold Drinks Sign	MMR72	409-423C-063
Chilled Wine Sign - Vineyard	MMR23	409-418C-064
Chilled Wine Sign - Vineyard	MMR27	409-419C-149
Chilled Wine Sign - Vineyard	MMR44	409-421C-079
Chilled Wine Sign - Vineyard	MMR49	409-422C-120
Chilled Wine Sign - Vineyard	MMR72	409-423C-069
Chilled Wine Sign - Corks	MMR23	409-418C-065
Chilled Wine Sign - Corks	MMR27	409-419C-150
Chilled Wine Sign - Corks	MMR44	409-421C-080
Chilled Wine Sign - Corks	MMR49	409-422C-121
Chilled Wine Sign - Corks	MMR72	409-423C-070
Got Milk Sign	MMR27	409-419C-102
Got Milk Sign	MMR 45/49	409-422C-087
Got Milk Sign	MMR 66/72	409-423C-054







Chilled Wine Sign - Corks









OPEN AIR MERCHANDISERS

EASY-ACCESS AND HIGH VISIBILITY PRODUCT DISPLAYS



Breeze[™] Series



VueMax™ Series





BREEZE™ SERIES



Unique size suited for endcaps and schools

Custom graphics available

3 year parts and labor warranty with an additional 4 year compressor part warranty

Exterior finish is a heavy-duty steel with a durable, baked on black or white coating

Curved design with open front & side shield

to maximize product display

Interior is white coated steel

2 recessed interior lights

provide maximum product visibility

3 epoxy coated shelves

Modern grille is easy to remove

for cleaning or service

Gravity-Flo organizer

Holds unit temperature from 32°-40°F

Certified for bottled beverage & packaged foods

Brightly lit sign panel

Featuring environmentally friendly energy-efficient R290 refrigerant



SIDE SHIELD to maximize product display



GRAVITY-FLO organizer standard



REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

MODEL#	SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
вz13нс-в		20		54.38	115	3/4	9.1	12.63	BLACK
BZ13HC-W	3 3HC-W	30	32.75						WHITE

Depth measurement includes handles. For total height, add 2 inches for the caster height.





EXTERIOR FINISHES

- Black
- White

INTERIOR FINISHES

White

AVAILABLE ACCESSORIES

- Black dividers
- Black shelves
- Roller kit
- · Custom graphics and signage

AGENCY CERTIFICATIONS









VUEMAX™ SERIES



Ideal for gourmet shops, delicatessens, convenience stores & bakeries

3 year parts and labor warranty with an additional 4 year compressor part warranty

Heavy duty steel exterior

with a durable paint finish

Glass sides enhance product visibility

from side viewpoints

Foamed in place CFC-free polyurethane

insulation enhances the structural strength of the cabinet and increases energy efficiency

LED lighting

enhances product illumination for maximum visibility

Shelving display flexibility

Shelves can be installed in two positions

Full electronic temperature control

from 36° -40°F, with display

Certified for bottled beverage & packaged foods

Night curtain

Stylish impact bumper

Featuring environmentally friendly energy-efficient R290 refrigerant



SIDE SHIELD to maximize product display



CUSTOM GRAPHICS AVAILABLE

for brand or product promotion



REGULAR DEPTH

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL#	SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
VMHC-7-1	3	35.5	31.75	63.88	115	1/3	10	9.58
VMHC-12-1	5	35.13	31.75	83.13	115	(2) 1/4	12	15.45
VMHC-18-1	5	52	31.75	83.38	115	(2) 1/3	12	23.87


Height measurements include 6 inch legs.

NARROW DEPTH

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL#	SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
VMHCSL-18	5	47.3	24.38	83.5	115	2 (1/3)	12	23

Height measurements include 6 inch legs.

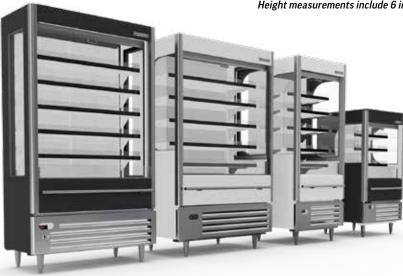

EXTERIOR FINISHES

- Black wrap over stainless steel
- White wrap over stainless steel
- · Grey painted stainless steel

INTERIOR FINISHES

White

AVAILABLE ACCESSORIES

- Lockable Security Cage
- · Bar/bag hooks
- · Price tag molding
- Clearcool Curtain
- Custom graphics available

MOUNTING OPTIONS

- 6" adjustable legs (standard)
- 5" casters

AGENCY CERTIFICATIONS





Intertek Intertek





Open Air Merchandiser Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING/ORGANIZERS		
Epoxy Coated Wire Shelf	BZ13	403-749D-01
Shelf Clip	BZ13	403-168A
Divider, 20oz	BZ13	403-750D-01

MOUNTING		
2" Roller Kit	BZ13	61C01-010A
5" Casters (set of 4)	VM7/VM12/VM18/VM18SL	61C01-014D-01

MERCHANDISING ACCESSORIES		
Front Product Display	VM7 / VM12	183602102
Front Product Display	VM18	183602101
Front Product Display	VM18 Slim	183602103
Side Saddle Bag Assembly (4 shelves)	VM7	183110203
Side Saddle Bag Assembly (7 shelves)	VM18	183110202
Clearcool Curtain Assembly, Plastic Strips	VM7	CLEARCOOL55
Clearcool Curtain Assembly, Plastic Strips	VM12	CLEARCOOL77
Clearcool Curtain Assembly, Plastic Strips	VM18	CLEARCOOL120
Wonder Bar Assembly, 48" Saddle Style Black w/6 Pegs	VM7 / VM12	WonderBar-ALPA-55/77
Wonder Bar Assembly, 48" Saddle Style Black w/6 Pegs	VM18 / VM18 Slim	WonderBar-ALPA-99/120

ADDITIONAL ACCESSORIES									
Locking Cage w/Lock	VM7	183629014ASM							
Locking Cage w/Lock	VM12	183629013ASM							
Locking Cage w/Lock	VM15	183629012ASM							
Locking Cage w/Lock	VM18	183629011ASM							
Locking Cage w/Lock	VM18 Slim	183629010							











DELI CASES

BOLD AND SPACIOUS PRODUCT DISPLAY FOR ANY DELI OR BAKERY







DELI CASES



Ideal for gourmet shops, bakeries, delicatessens and convenience stores

3 year parts and labor warranty with an additional 4 year compressor part warranty

Open-food rated

Sliding rear glass doors, easily removed for cleaning

Curved front glass

Full electronic control

LED lighting with on and off switch

Additional electrical outlet for scale

Adjustable shelves for better product display

Price tag molding standard

Powder coated galvanized steel exterior

Stainless steel floor with mirrored interior end caps



ACCESSIBLE OUTLET
Conveniently located for secondary small equipment such as scales.



REMOVABLE SLIDING DOORS for easy maintenance and cleaning of the unit and doors.

REFRIGERATED UNITS

MAINTAINS PRODUCT TEMPERATURES OF 33-41°F.

MODEL#	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR	
CDR3HC-1-B	37.25	35.75	48.5	115	1/0	4	10	BLACK	
CDR3HC-1-W		37.23	33./3	40.3	115	1/6	4	10	WHITE
CDR4HC-1-B	40.05	25.75	48.5	115	1/6	4	14	BLACK	
CDR4HC-1-W	49.25	35.75	40.3	113	1/0	4		WHITE	
CDR5HC-1-W	60.25	35.75	48.5	115	1/4	5	17	BLACK	
CDR5HC-1-B	60.25	33./3	40.3	115	1/4			WHITE	
CDR6HC-1-B	73.75	70.75	25.75	40.5			_	4.	BLACK
CDR6HC-1-W		35.75	48.5	115	1/4	5	21	WHITE	

Depth measurement includes handles. For total height, add 2 inches for the caster height.

DRY CASES (NON-REFRIGERATED)

MODEL#	WIDTH	DEPTH	HEIGHT	CUBIC FEET	COLOR
CDR3HC-1-B-D	37.25	35.75	48.5	10	BLACK
CDR3HC-1-W-D	37.25	35./5	48.5	IU	WHITE
CDR4HC-1-B-D	49.25	35.75	48.5	14	BLACK
CDR4HC-1-W-D	49.25	35./5	46.5	14	WHITE
CDR5HC-1-W-D	CO 25	25.75	40.5	47	BLACK
CDR5HC-1-B-D	60.25	35.75	48.5	17	WHITE
CDR6HC-1-B-D	70.75	0F 7F	40.5		BLACK
CDR6HC-1-W-D	73.75	35.75	48.5	21	WHITE

Depth measurement includes handles. For total height, add 2 inches for the caster height.

EXTERIOR FINISHES

- Black
- White

INTERIOR FINISHES

· Stainless steel floor with mirrored interior end caps

AVAILABLE OPTIONS

• Dry units

MOUNTING OPTIONS

- · 3" casters
- 5" casters

AGENCY CERTIFICATIONS











FOOD PREP TABLES

BACK BONE OF FOOD SERVICE WITH ALMOST LIMITLESS OPTIONS





Pizza Prep



Salad Bar







Food Prep Tables



Designed to perform in high ambient conditions

3 year parts and labor warranty with an additional 4 year compressor part warranty

Made in USA

Full electronic control

Heavy-duty aluminum pan liner

easy to clean and prevents spills from falling into cabinet while also ensuring coldest air flows across bottom of pans

Reversible cutting boards

1/2" thick, 10" deep

Locking divider bars

Field-reversible doors

with 120 degree stay-open feature

Two epoxy coated shelves

per door section standard

Snap-in door gaskets

Accommodates up to 6" deep food service pans

4" deep 1/6 size polycarbonate pans are included


Heavy duty insulated covers

protects products and eliminates sweating when closed

6" heavy duty casters standard

3" casters or 6" leg option available at no charge when specified on order



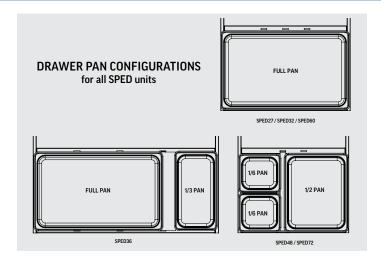

ACCESS OPTIONS

Doors

Drawers Dual-sided

PERFECT SEAL PAN LINER ensures airflow under pans and protects bottom of cabinet from pan spills



CLEAR LIDS AVAILABLE for optimized product display

EXTERIOR FINISHES

- Stainless steel with galvanized back
- · Stainless steel with stainless back

INTERIOR FINISHES

- · Corrosion-resistant aluminum
- · Stainless steel

AVAILABLE OPTIONS

- · Left hinge doors
- · Remote models available

AVAILABLE ACCESSORIES

- · 12" crossbar
- · Side/front crumb catchers
- · Overshelf kits
- Composite cutting boards
- Bun tray rack
- · Locks (for solid doors)

LID OPTIONS

(specify at time of order)

- · Clear lids
- · Flat-hinged lids
- · Lift-off lids
- · See-thru lids

MOUNTING OPTIONS

- 6" casters3" casters (allows for ADA compliant working height)
- 6" legs



AVAILABLE IN STANDARD TOP, MEGA TOP, AND CUTTING TOP

STANDARD TOP

Two rows of food pans for easy access to ingredients. Perfect for smaller sandwich, salad or back of the house line service



MEGA TOP

Three rows of food pans offer 50% more capacity than a standard top prep table. Ideal for users with a wide array of ingredients



CUT TOP

An extra deep, 14" cutting board on a standard top unit offers additional workspace for larger item prep, catering or complicated menu items







AVAILABLE LID CHOICES

(specify at time of order)



ROLL TOP

The standard lid for our sandwich prep units. A roll top lid allows for easy access and can be closed during non-service periods to allow the refrigeration system to recover.



FLAT-HINGED

Durable lid helps to keep ingredients at food-safe temperature while the hinge locks the lid into place, allowing for easy access to the back row of pans.

SEE-THRU

Full glass, piston driven lid allows for easy view of ingredients and pan fill lines without removing the lid, and can act as a sneeze guard when optioned with a single overshelf and side guards.



CLEAR

A polycarbonate option that is ideal for operations that want to showcase their fresh ingredients to customers while keeping a lid on their pan section.



LIFT-OFF

Allows for full view of pan section and maximizes full use of work area. The low profile of lift off lids permits the unit to fit under existing shelving or service windows.







STANDARD TOP

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	STANDARD PANS 4" DEEP
_	SPE27HC	_	1/2	07	00	20.05	445	4 10		0.04	(0)4/0 : 0 (0)4/0 :
1	SPED27HC	2	_	27	32	39.25	115	1/6	2	6.91	(6) 1/6 size & (2) 1/9 size
_	SPE27HC-B	-	1/2	07	00	20.05	445	1/6	2	6.91	(0) 1/6 ai-a
1	SPED27HC-B	2	_	27	32	39.25	115				(8) 1/6 size
	SPE32HC-08	-	1/2	22	22	20.25	445	1/0	_	0.01	(0) 1 (0 - i
1	SPED32HC-08-2	2	_	32	32	39.25	115	1/6	2	8.01	(8) 1/6 size
	SPE36HC-08	-	2/4	20	22	20.25	445	1/0	_	10.01	(0) 1 (0 -i
2	SPED36HC-08-2	2	_	36	32	39.25	115	1/6	2	10.01	(8) 1/6 size
2	SPE36HC-10	-	2/4	26	36 32	39.25	115	1/6	2	10.01	(10) 1/6 size
	SPED36HC-10-2	2	_	30 32 3	35.23	115	1/0		10.01	(10) 1/6 size	
	SPE48HC-08	-	2/4								
	SPED48HC-08-2	2	1/2	48 32	39.25	115	1/6	1/6 2.2	13.01	(8) 1/6 size	
	SPED48HC-08-4	4	_								
	SPE48HC-10	_	2/4	48				1/6	2.2	13.01	(10) 1/6 size
2	SPED48HC-10-2	2	1/2		32	39.25	115				
	SPED48HC-10-4	4	_								
	SPE48HC-12	_	2/4			39.25				13.01	(12) 1/6 size
	SPED48HC-12-2	2	1/2	48	32		115	1/6	2.2		
	SPED48HC-12-4	4	_								
	SPE60HC-08	_	2/4					1/3	5.4		
	SPED60HC-08-2	2	1/2	60	32	39.25	115			16.02	(8) 1/6 size
	SPED60HC-08-4	4	_								
	SPE60HC-10	_	2/4								
	SPED60HC-10-2	2	1/2	60	32	39.25	115	1/3	5.4	16.02	(10) 1/6 size
2	SPED60HC-10-4	4	_								
2	SPE60HC-12	_	2/4								
	SPED60HC-12-2	2	1/2	60	32	39.25	115	1/3	5.4	16.02	(12) 1/6 size
	SPED60HC-12-4	4	_								
	SPE60HC-16	_	2/4								
	SPED60HC-16-2	2	1/2	60	32	39.25	115	1/3	5.4	16.02	(16) 1/6 size
	SPED60HC-16-4	4	_								

STANDARD TOP

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	STANDARD PANS 4" DEEP
	SPE72HC-08	_	3/6								
	SPED72HC-08-2	2	2/4	70	20	20.05	445	4/0	- A	20.00	(0)4(0 :
	SPED72HC-08-4	4	1/2	72	32	39.25	115	1/3	5.4	20.02	(8) 1/6 size
	SPED72HC-08-6	6	-								
	SPE72HC-10	_	3/6								
	SPED72HC-10-2	2	2/4	72	32	39.25	115	1/3	5.4	20.02	(10) 1/6 size
	SPED72HC-10-4	4	1/2								
	SPED72HC-10-6	6	-								
3	SPE72HC-12	_	3/6					1/3	5.4		(12)
	SPED72HC-12-2	2	2/4	70							
	SPED72HC-12-4	4	1/2	72	32	39.25	115			20.02	(12) 1/6 size
	SPED72HC-12-6	6	-								
	SPE72HC-18	_	3/6								
	SPED72HC-18-2	2	2/4	70	•	20.05	445	1/3	- A	20.00	(18) 1/6 size
	SPED72HC-18-4	4	1/2	72	32	39.25	115		5.4	20.02	
	SPED72HC-18-6	6	_								

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

CONDIMENT STATIONS WITH SNEEZEGUARD

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	STANDARD PANS 4" DEEP
1	SPE27HC-SNZ	_	1/2	27	32	53	115	1/6	2	7.3	(6) 1/6 pans, (2) 1/9
2	SPE48HC-12-SNZ	-	2/4	48	32	53.13	115	1/6	2.2	13.9	(12) 1/6 pans







MEGA TOP

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	HP	AMPS	CUBIC FEET	STANDARD PANS 4" DEEP
1	SPE27HC-12M	_	1/2	27	20.20	42.75	115	1/0	2	6.91	(0) 1 (0 - : 5 (2) 1 (0 - :
	SPED27HC-12M	2	_	27	38.38	42./5	115	1/6	2	6.91	(9) 1/6 size & (3) 1/9 size
1	SPE27HC-12M-B	-	1/2	27	38.5	42.75	115	1/6	2	6.91	(12) 1/6 size
1	SPED27HC-12M-B	2	_	21	30.3	42./3	115	1/0	2	0.91	(12) 1/6 SIZE
1	SPE32HC-12M	_	1/2	32	38.38	43	115	1/6	2	8.01	(12) 1/6 size
'	SPED32HC-12M-2	2	_	32	30.30	43	115	1/0	2	6.01	(12) 1/6 Size
	SPE36HC-12M	_	2/4	36	38.38	43	115	1/6	2	10.01	(12) 1/6 size
2	SPED36HC-12M-2	2	_	30	30.30	43	115	1/0		10.01	(12) 1/0 Size
2	SPE36HC-15M	-	2/4	36	38.38	43	115	1/6	2	10.01	(15) 1/6 size
	SPED36HC-15M-2	2	_	30	30.30	43	113	1/0	2	10.01	(13) 1/0 3126
	SPE48HC-12M	_	2/4						2.2		
	SPED48HC-12M-2	2	1/2	48	38.38	43	115	1/6		13.01	(12) 1/6 size
2	SPED48HC-12M-4	4	_								
	SPE48HC-18M	_	2/4		38.38			115 1/6		13.01	(18) 1/6 size
	SPED48HC-18M-2	2	1/2	48		43	43 115		6 2.2		
	SPED48HC-18M-4	4	_								
	SPE60HC-12M	-	2/4								
	SPED60HC-12M-2	2	1/2	60	38.38	43	115	1/3	5.4	16.02	(12) 1/6 size
	SPED60HC-12M-4	4	_								
	SPE60HC-18M	-	2/4								
2	SPED60HC-18M-2	2	1/2	60	38.38	43	115	1/3	5.4	16.02	(18) 1/6 size
	SPED60HC-18M-4	4	_	60 3							
	SPE60HC-24M	-	2/4								
	SPED60HC-24M-2	2	1/2		38.38	38.38 43	115	115 1/3	5.4	16.02	2 (24) 1/6 size
	SPED60HC-24M-4	4	_								

MEGA TOP

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	STANDARD PANS 4" DEEP
	SPE72HC-12M	_	3/6								
	SPED72HC-12M-2	2	2/4	70	20.20	40	115	1/0	- A	20.00	(12) 1/6 size
	SPED72HC-12M-4	4	1/2	72	38.38	43	113	1/3	5.4	20.02	
	SPED72HC-12M-6	6	_								
	SPE72HC-18M	_	3/6								
	SPED72HC-18M-2	2	2/4	72	20.20	43	115	1/3	5.4	20.02	(40) 4/0 -:
	SPED72HC-18M-4	4	1/2	12	38.38		115	1/3	5.4	20.02	(18) 1/6 size
3	SPED72HC-18M-6	6	_								
3	SPE72HC-24M	_	3/6		22.22		115			20.02	(0.0)4/0 :
	SPED72HC-24M-2	2	2/4	72				1/3	3 5.4		
	SPED72HC-24M-4	4	1/2	12	38.38	43	115	1/3	5.4	20.02	(24) 1/6 size
	SPED72HC-24M-6	6	_								
	SPE72HC-30M	_	3/6								
	SPED72HC-30M-2	2	2/4	72 38.38	20.20	40	115	1/2	E 4	20.02	(20) 1/6 -:
	SPED72HC-30M-4	4	1/2		38.38	3.38 43	115	1/3	5.4	20.02	(30) 1/6 size
	SPED72HC-30M-6	6	_								

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

MEGATOP - DUAL-SIDED

SECTIONS	MODEL#	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	STANDARD PANS 4" DEEP
1	SPE27HC-12M-B-DS	2/2	27	48.75	40.75	115	1/6	2	6.91	(12) 1/6 size
2	SPE48HC-18M-DS	4/4	48	48.75	40.75	115	1/6	2.2	13.01	(18) 1/6 size
2	SPE60HC-24M-DS	4/4	60	48.75	40.75	115	1/3	5.4	16.02	(24) 1/6 size
3	SPE72HC-30M-DS	6/6	72	48.75	40.75	115	1/3	5.4	20.02	(30) 1/6 size

MEGA TOP - SEE-THRU LIDS

SECTIONS	MODEL#	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	STANDARD PANS 4" DEEP
2	SPE36HC-15M-STL	2/4	36	38.38	53.75	115	1/6	2	10.01	(15) 1/6 size
2	SPE48HC-18M-STL	2/4	48	38.38	53.75	115	1/6	2.2	13.01	(18) 1/6 size
2	SPE60HC-24M-STL	2/4	60	38.38	53.75	115	1/3	5.4	16.02	(24) 1/6 size
3	SPE72HC-30M-STL	3/6	72	38.38	53.75	115	1/3	5.4	20.02	(30) 1/6 size







CUTTING TOP (17" DEEP REVERSIBLE CUTTING BOARD)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	STANDARD PANS 4" DEEP
	SPE27HC-C	_	1/2	07	20.00	20.05	445	4 (0		0.04	(0)4/0 : 0 (0)4/0 :
1	SPED27HC-C	2	_	27	38.38	39.25	115	1/6	2	6.91	(6) 1/6 size & (2) 1/9 size
1	SPE27HC-C-B	_	1/2	27	38.38	39.25	115	1/6	2	6.91	(0) 1/6 size
•	SPED27HC-C-B	2	_	21	30.30	33.23	115	1/6	2	0.31	(8) 1/6 size
	SPE36HC-08C	_	2/4	36	38.38	39.25	115	1/6	2	10.01	(8) 1/6 size
2	SPED36HC-08C-2	2	_	30	30.30	33.23	113	1/0		10.01	(6) 1/0 5126
	SPE36HC-10C	_	2/4	36	38.38	39.25	115	1/6	2	10.01	(10) 1/6 size
	SPED36HC-10C-2	2	_		30 38.38	33.23	113	1/0	2	10.01	(10) 1/0 size
	SPE48HC-08C	_	2/4								
	SPED48HC-08C-2	2	1/2	48	38.38	39.25	115	1/6	2.2	13.01	(8) 1/6 size
	SPED48HC-08C-4	4	_								
	SPE48HC-10C	_	2/4								
2	SPED48HC-10C-2	2	1/2	48	38.38	39.25	115	1/6	2.2	13.01	(10) 1/6 size
	SPED48HC-10C-4	4	_								
	SPE48HC-12C	_	2/4		38.38						(12) 1/6 size
	SPED48HC-12C-2	2	1/2	48		39.25	115	1/6	/6 2.2	13.01	
	SPED48HC-12C-4	4	-								
	SPE60HC-08C	_	2/4								
	SPED60HC-08C-2	2	1/2	60	38.38	39.25	115	1/3	5.4	16.02	(8) 1/6 size
	SPED60HC-08C-4	4	_								
	SPE60HC-10C	_	2/4								
	SPED60HC-10C-2	2	1/2	60	38.38	39.25	115	1/3	5.4	16.02	(10) 1/6 size
2	SPED60HC-10C-4	4	_								
_	SPE60HC-12C	_	2/4								
	SPED60HC-12C-2	2	1/2		38.38	39.25	115	1/3	5.4	16.02	(12) 1/6 size
	SPED60HC-12C-4	4	_								
	SPE60HC-16C	_	2/4								
	SPED60HC-16C-2	2	1/2		38.38	8.38 39.25	115 1	1/3	5.4	16.02	(16) 1/6 size
	SPED60HC-16C-4	4	_								

CUTTING TOP (17" DEEP REVERSIBLE CUTTING BOARD)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.


SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	STANDARD PANS 4" DEEP
	SPE72HC-08C	_	3/6								
	SPED72HC-08C-2	2	2/4	72	38.38	39.25	115	1/3	E 4	20.02	(8) 1/6 size
	SPED72HC-08C-4	4	1/2	12	30.30	30.30 33.23	113	1/3	5.4	20.02	(6) 1/6 SIZE
	SPED72HC-08C-6	6	_								
	SPE72HC-10C	_	3/6								
	SPED72HC-10C-2	2	2/4	72	20 20	39.25	115	1/3	5.4	20.02	(10) 1/6 size
	SPED72HC-10C-4	4	1/2	12	72 38.38	35.23	113	1/3	3.4	20.02	(IU) I/6 SIZE
3	SPED72HC-10C-6	6	_								
3	SPE72HC-12C	_	3/6			8 39.25	39.25 115				(12) 1/6 size
	SPED72HC-12C-2	2	2/4	72	38.38			1/3	3 5.4	20.02	
	SPED72HC-12C-4	4	1/2	12	30.30	35.23	115		5.4	20.02	(12) 1/0 Size
	SPED72HC-12C-6	6	_								
	SPE72HC-18C	_	3/6								
	SPED72HC-18C-2	2	2/4	72 38.38 39	20.25	115	1/2	E 1	20.02	(18) 1/6 size	
	SPED72HC-18C-4	4	1/2		39.25	115	1/3	5.4	20.02	(10) 1/0 5126	
	SPED72HC-18C-6	6	_								










Pan Configurations

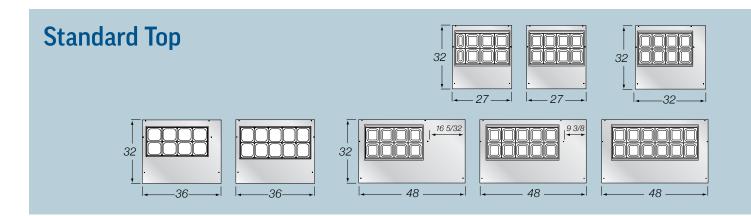


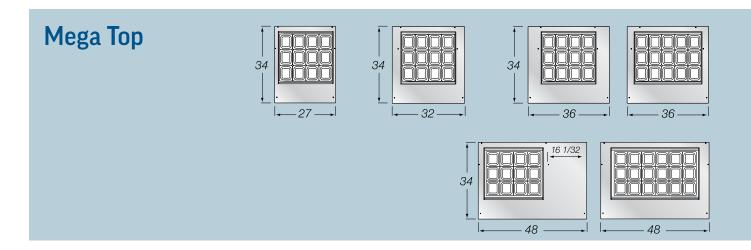


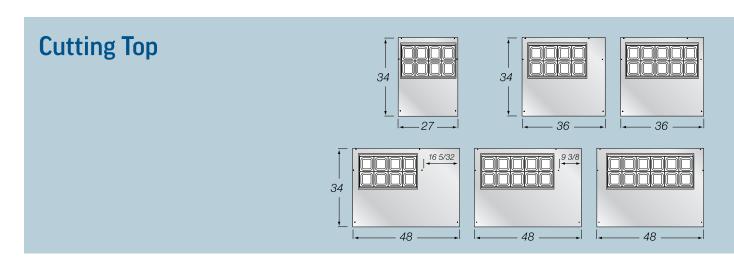

Accommodates up to 6"deep food service pans

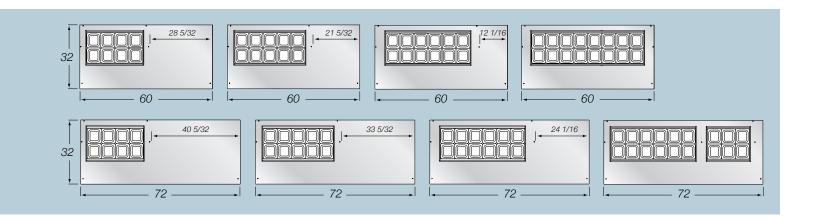

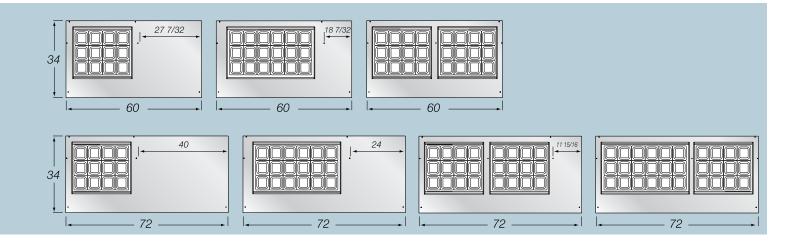

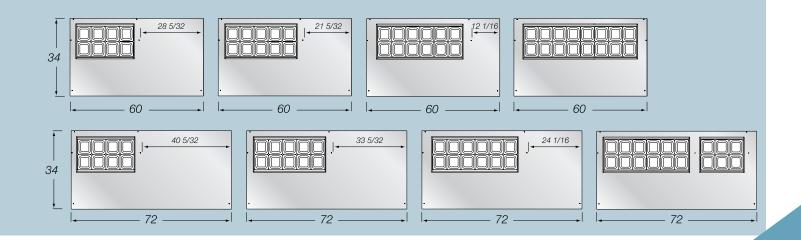





PIZZA PREP

Pizza & Deli Prep Tables



Low-profile design for enhanced ergonomics and product display

Improved airflow maintains consistent pan temperature in top rail

Designed to perform in high ambient conditions

Duct system features uniform airflow distribution

over evaporator coil and throughout raised rail

Electronic controller with smart-defrost

12-Gauge stainless steel drawer slides with Delrin° rollers rated at 275 lbs

Electrical defrost heater

terminates defrost sooner, reducing product instability

Right or left compressor placement

specify at time of order

Field-reversible doors

with 120 degree stay open feature

Heavy-duty aluminum pan liner

is easy to clean and prevents spills from falling into cabinet

Accommodates up to 6" deep food service pans

Not included

Improved serviceability


Removable service panel for easy access to refrigeration system

Featuring environmentally friendly energy efficient R290 refrigerant



ACCESS OPTIONS

- Doors
- Drawers (stacks of 2 or 3)

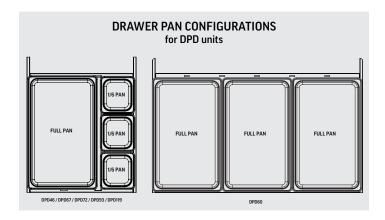



3 DRAWERS IN SINGLE SECTION available on all sizes



CLEAR LIDS AVAILABLE for optimized product display

EXTERIOR FINISHES

- · Stainless steel with galvanized back
- · Stainless steel with stainless back

INTERIOR FINISHES

- · Corrosion-resistant aluminum
- · Stainless steel

AVAILABLE OPTIONS

- · Left hinge doors
- · Remote models available
- · Alternate compressor locations

AVAILABLE ACCESSORIES

- · Composite cutting boards
- Bun tray racks
- Overshelf
- Locks
- · Additional shelves
- · Pan slides (18x26)

LID OPTIONS

- · Clear lids
- Flat Lift-off lids

MOUNTING OPTIONS

- 3" casters (standard)
- 6" casters
- 6" legs

AGENCY CERTIFICATIONS












PIZZA PREP


PIZZA PREP

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	FULL SIZE PAN CAPACITY
	DP46HC	_	1/2								
1	DPD46HC-2	2	-	46	37	49.75	115	1/3	4.5	11.91	2
	DPD46HC-3	3	_								
	DP60HC	-	2/4								3 full pans & 1 half pan
2	DPD60HC-2	2	-	60	37	49.75	115	1/3	4.5	17	
	DPD60HC-3	3	-								
	DP67HC	-	2/4			49.75	115				
	DPD67HC-2	2	1/2								
2	DPD67HC-3	3	-	67	37			1/3	4.5	20.68	3
	DPD67HC-4	4	-								
	DPD67HC-6	6	-								
	DP72HC	-	2/4			49.75	115				
	DPD72HC-2	2	1/2		37			1/3	4.5	21.87	3
2	DPD72HC-3	3	-	72							
	DPD72HC-4	4	-								
	DPD72HC-6	6	-								
	DP93HC	-	3/6			49.75	115				
	DPD93HC-2	2	2/4					1/2	2 7.8		
3	DPD93HC-3	3	-	93	37					31.54	4
	DPD93HC-4	4	1/2								
	DPD93HC-6	6	-								
	DP119HC	-	4/8								
	DPD119HC-2	2	3/6								
	DPD119HC-3	3	3/6								
4	DPD119HC-4	4	2/4	119	37	49.75	115	1/2	7.8	42.2	5 full pans
4	DPD119HC-6	6	1/2		3/	43./3	115	1/2	7.0	42.2	& 1 one-third pan
	DPD119HC-6T	6	2/4								
	DPD119HC-8	8	-								
	DPD119HC-9	9	1/2								

Depth measurement includes cutting board. For total height, add 3 or 6 inches, based on your mounting choice.

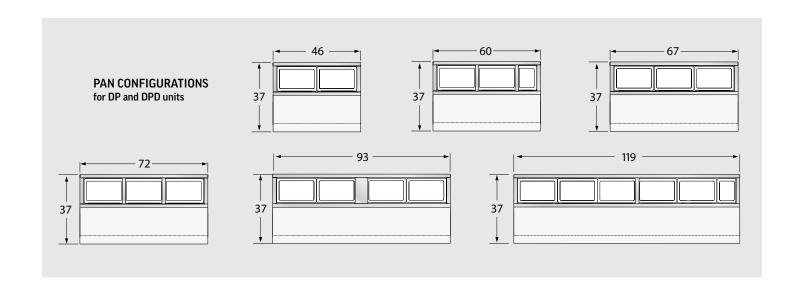

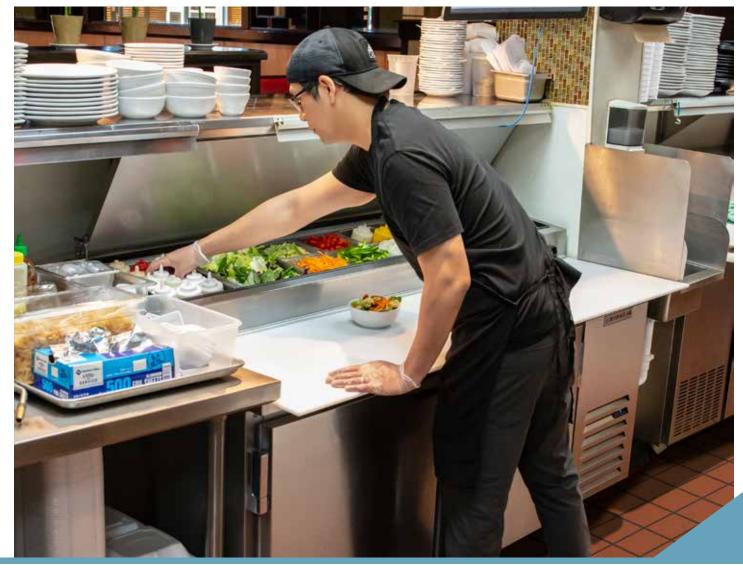





SALAD BARS



Designed to perform in high ambient conditions

3 year parts and labor warranty with an additional 4 year compressor part warranty

Made in USA

Locking divider bars

Lift-off lids standard

to help maintain product temperature

Heavy-duty aluminum pan liner

Easy to clean and prevents spills from falling into cabinet while also ensuring coldest air flows across bottom of pans

Field-reversible doors with 120 degree stay-open feature

Two epoxy coated shelves

per door section standard

Snap-in door gaskets

Accommodates up to 6" deep food service pans

4" deep 1/3 size polycarbonate pans are included

6" heavy duty casters standard

3" casters or 6" leg option available at no charge when specified on order



PERFECT SEAL PAN LINER

ensures airflow under pans and protects bottom of cabinet from pan spills



LIFT-OFF LIDS standard

to help maintain product temperature

SALAD BARS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

MODEL#	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	STANDARD PANS 4" DEEP
SPE36HC-S	2/4	36	30.13	30.88	115	1/6	2	10	(6) 1/3 size
SPE48HC-S	2/4	48	30.13	30.88	115	1/6	2.2	13	(9) 1/3 size
SPE60HC-S	2/4	60	30.13	30.88	115	1/3	5.4	16	(12) 1/3 size
SPE72HC-S	3/6	72	30.13	30.88	115	1/3	5.4	20	(15) 1/3 size

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles.



ACCESS OPTIONS

Doors

EXTERIOR FINISHES

 Stainless steel with stainless back

INTERIOR FINISHES

- · Corrosion-resistant aluminum
- Stainless steel

LID OPTIONS

· Lift-Off Lids

AVAILABLE OPTIONS

- · Left hinge doors
- · Remote models available

MOUNTING OPTIONS

- 6" casters
- · 3" casters (allows for ADA compliant working height)
- 6" legs

AVAILABLE ACCESSORIES

- · Foldable tray slides for single or dual-sided service
- Dual-sided sneeze guard, with optional add on for single side service
- Locks









Food Prep Table Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING/ORGANIZERS		
Epoxy Coated Wire Shelf (Large)	SPE27/27-12M/27C	403-826B
Epoxy Coated Wire Shelf (Small)	SPE27/SPE27-12M/SPE27C	403-912D-01
Epoxy Coated Wire Shelf (Large)	SPE36/SPE36M/SPE36C	403-911D-01
Epoxy Coated Wire Shelf (Small)	SPE36/SPE36M/SPE36C	403-915D-01
Epoxy Coated Wire Shelf (Large)	SPE48/48M/48C	403-828B
Epoxy Coated Wire Shelf (Small)	SPE48/SPE48M/SPE48C	403-913D-01
Epoxy Coated Wire Shelf (Large)	SPE60/60M/60C	403-829B
Epoxy Coated Wire Shelf (Small)	SPE60/SPE60M/SPE60C	403-914D-01
Epoxy Coated Ctr Section Wire Shelf (Large)	SPE72/72M/72C	403-827B
Epoxy Coated Wire Shelf L&R (Large)	SPE72/72M/72C	403-828B
Epoxy Coated Ctr Section Wire Shelf (Small)	SPE72/SPE72M/SPE72C	403-912D-01
Epoxy Coated Wire Shelf L&R (Small)	SPE72/SPE72M/SPE72C	403-913D-01
Shelf Clip	All SPE/SPED/DP/DPD	403-169A
Large Wire Shelf Divider	SPE27	403-722C
Small Wire Shelf Divider	SPE27	403-721C
Large Wire Shelf Divider	SPE36	403-723C
Small Wire Shelf Divider	SPE36	403-721C
Large Wire Shelf Divider	SPE48	403-723C
Small Wire Shelf Divider	SPE48	403-721C
Large Wire Shelf Divider	SPE60	403-723C
Small Wire Shelf Divider	SPE60	403-721C
Large Wire Shelf Divider	SPE72	403-721C
Small Wire Shelf Divider	SPE72	403-721C
Bottle Organizer (Holds Qty. 10 Bottles) 16 oz.	SPE Mega Tops	00B23-023D-01
Bottle Organizer (Holds Qty. 10 Bottles) 24 oz.	SPE Mega Tops	00B23-024D-01
Bottle Organizer (Holds Qty. 8 Bottles) 16 oz.	SPE Standard & Cutting Tops	00B23-025D-01
Bottle Organizer (Holds Qty. 6 Bottles) 24 oz.	SPE Standard & Cutting Tops	00B23-026D-01
	or 2 statistical as outling topo	00220 0232 0.
CRUMBCATCHERS		
Crumbcatcher Kit	SPE27A/SPE27B/SPE27MA/SPE27MB	00C23-071A-01
Crumbcatcher Kit	SPE36/36M	00C23-071A-09
Crumbcatcher Kit	SPE48/48M	00C23-071A-02
Crumbcatcher Kit	SPE60/60M	00C23-071A-03
Crumbcatcher Kit	SPE72/72M	00C23-071A-04
Crumbcatcher Kit	SPE27C	00C23-071A-05
Crumbcatcher Kit	SPE48C	00C23-071A-06
Crumbcatcher Kit	SPE60C	00C23-071A-07
Crumbcatcher Kit	SPE72C	00C23-071A-08
Side Crumbcatcher Kit	SPE Series	00C23-072A
TRAY SLIDES & PAN INSERTS		
	SDF27A	00022 0220 04
Pan Insert	SPE27A	00B23-032D-01
Pan Insert	SPE27B	00B32-033D-01

DESCRIPTION	UNIT(S)	PART NUMBER
SPE WHITE POLY CUTTING BOARDS		
10" Cutting Board	SPE27/27-12M, SPED27	705-290C-01
10" Cutting Board	SPE36/SPE36 MEGA/SPED36	705-290C-05
10" Cutting Board	SPE48/48M, SPED48	705-290C-02
10" Cutting Board	SPE60/60M, SPED60	705-290C-03
10" Cutting Board	SPE72/72M, SPED72	705-290C-04
17" Cutting Board	SPE27C, SPED27C	705-264C
17" Cutting Board	SPE32C, SPED32C	705-414D-02
17" Cutting Board	SPE36C/SPED36C	705-414D-01
17" Cutting Board	SPE48C, SPED48C	705-265C
17" Cutting Board	SPE60C, SPED60C	705-266C
17" Cutting Board	SPE72C, SPED72C	705-267C
DP WHITE POLY CUTTING BOARDS (1/19" Cutting Board	(2" THICK) DP46	705-307C-01
19" Cutting Board	DP67	705-286B
19" Cutting Board	DP93	705-287B
19" Cutting Board	DP119	705-288B
		'
SPE COMPOSITE CUTTING BOARDS (1,	/2" THICK)	
10" Composite Cutting Board	SPE27M	705-392D-06
17" Composite Cutting Board	SPE27C	705-392D-07
10" Composite Cutting Board	SPE36A	705-392D-15
10" Composite Cutting Board	SPE48	705-392D-04
12" Composite Cutting Board	SPE48	705-378B-01
15" Composite Cutting Board	SPE48C	705-392D-01
17" Composite Cutting Board	SPE48C	705-392D-08

DP COMPOSITE CUTTING BOARDS (1/2" TH	DP COMPOSITE CUTTING BOARDS (1/2" THICK)						
19" X 46" Composite Cutting Board	DP46	705-392D-11					
19" X 67" Composite Cutting Board	DP67	705-392D-12					
19" X 93" Composite Cutting Board	DP93	705-392D-13					
19" X 119" Composite Cutting Board	DP119	705-392D-14					

SPE60

SPE60C

SPE60C

SPE72

SPE72C

10" Composite Cutting Board

15" Composite Cutting Board

17" Composite Cutting Board

10" Composite Cutting Board

17" Composite Cutting Board





705-392D-05

705-392D-02

705-392D-09

705-378B-02

705-392D-10

Food Prep Table Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
OVERSHELVES		
10" Single	SPE27	00C23S026A
10" Single	SPE36-08	00C23-074A-11
10" Single	SPE36-10	00C23-074A-12
10" Single	SPE48	00C23-027A
10" Single	SPE60	00C23-028A
10" Single	SPE72	00C23-029A
10" Double	SPE27	00C23-030A
10" Double	SPE36-08	00C23-075A-08
10" Double	SPE36-10	00C23-075A-09
10" Double	SPE48	00C23-031A
10" Double	SPE60	00C23-032A
10" Double	SPE72	00C23-033A
Single	SPE27-12M	00C23-074A-01
Single	SPE32-12M	00C23-074A-02
Single	SPE36-12M	00C23-074A-10
Single	SPE36-15M	00C23-074A-12
Single	SPE48/60/72-12M	00C23-074A-02
Single	SPE48-18M	00C23-074A-03
Single / For Dual-Sided	SPE48-18M-DS	00C23-105D
Single	SPE60-18M	00C23-074A-04
Single	SPE60-24M	00C23-074A-05
Single / For Dual-Sided	SPE60-24M-DS	00C23-106D
Single	SPE72-18M	00C23-074A-06
Single	SPE72-24M	00C23-074A-07
Single	SPE72-30M	00C23-074A-08
Single / For Dual-Sided	SPE72-30M-DS	00C23-093A
Double	SPE27-12M	00C23-030A
Double	SPE27-12M-B	00C23-075A-06
Double	SPE36-12M	00C23-075A-08
Double	SPE36-15M	00C23-075A-09
Double	SPE48-12M	00C23-075A-01
Double / For Dual-Sided	SPE48-18M-DS	00C23-075A-01 00C23-107D-02
Double Double	SPE60-12M	00C23-075A-01
Double	SPE72-12M	00C23-075A-01
Double	SPE48-18M	00023-075A-01
Double	SPE60-18M	00C23-075A-03
Double / Fan Book Sided	SPE60-24M	00C23-075A-04
Double / For Dual-Sided	SPE60-24M-DS	00C23-107D-03
Double	SPE72-24M	00C23-032A
Double Double / For Dual Sided	SPE72-30M	00C23-075A-05
Double / For Dual-Sided	SPE72-30M-DS	00C23-107D-04
Single - 14" Deep	DP46	00C23-044A
Single - 14" Deep	DP60	00C23-161D-01
Single - 14" Deep	DP67	00C23-045A
Single - 14" Deep	DP72	00C23-161D-03
Single - 14" Deep	DP93	00C23-046A
Single - 14" Deep	DP119	00C23-161D-05

DESCRIPTION	UNIT(S)	PART NUMBER
OVERSHELVES CONT'D		
Double - 14" Deep	DP46	00C23-119D-01
Double - 14" Deep	DP60	00C23-161D-02
Double - 14" Deep	DP67	00C23-116D-01
Double -14" Deep	DP72	00C23-161D-04
Double - 14" Deep	DP93	00C23-120D-01
Double - 14" Deep	DP119	00C23-161D-06
Single - 14" Deep	SPE36-15M-STL	00C23-110D
Single - 14" Deep	SPE48-18M-STL	00C23-094D
Single - 14" Deep	SPE60-24M-STL	00C23-095D
Single - 14" Deep	SPE72-30M-STL	00C23-096D
Single - 14" Deep with side guards & LED light	SPE48-18M-STL	00C23-113D-01
Single - 14" Deep with side guards & LED light	SPE60-24M-STL	00C23-113D-02
Single - 14" Deep with side guards & LED light	SPE72-30M-STL	00C23-113D-03
Double - 10" Deep	SPE27 (will not work on B top)	00C23-123D-01
Double - 10" Deep	SPE36	00C23-124D-01
Double - 10" Deep	SPE48	00C23-125D-01
Double - 10" Deep	SPE60	00C23-126D-01
Double - 10" Deep	SPE72	00C23-127D-01
Double - 18" Deep	SPE27-M (will not fit on B top)	00C23-128D-01
Double - 18" Deep	SPE36-M	00C23-129D-01
Double - 18" Deep	SPE48-M	00C23-130D-01
Double - 18" Deep	SPE60-M	00C23-131D-01
Double - 18" Deep	SPE72-M	00C23-132D-01

Clear-lid models (-CL) of SPE and SPED units cannot have an overshelf

ADDITIONAL ACCESSORIES		
Ooor Lock	DP, SPE (per door)	00C30-099A
MOUNTING		
3" Caster	SPE units (set of four)	00C31-041A
6" Caster	SPE units (set of four)	00C31-038A
3" Caster	DP46,67,93 (set of four)	61C01-013A
6" Caster	DP46,67,93 (set of four)	61C01-001A
3" Caster	DP119 (set of six)	61C01-012A
6" Black Leg	SPE units (set of four)	58B02-001A
" Black Leg	DP46,67,93 (set of four)	58B02-001A
6" Black Leg	DP119 (set of six)	58B02S002A
" Seismic/Flanged Legs	SPE Series (set of four)	00C31-055A
5" Seismic/Flanged Legs	DP Series (set of four)	00C31-055A
3/4 in Caster Kit	Low Profile (set of four) SPE	00C31-049A
2" Roller Kit	SPE units	00C31-045A





Food Prep Table Accessories

UNIT(S)		DESCRIPTION	PART NUMBER
NIGHT COVERS FOR STANDARD PREP	COVERS REQUIRED	DESCRIPTION	PART NUMBER
SPE27HCHC	1	8 pan cover	00C32-013A-02
SPE32HCHC-08	1	8 pan cover	00C32-013A-06
SPE36HC-08	1	8 pan cover	00C32-013A-06
SPE36HC-10	1	10 pan cover	00C32-013A-07
SPE48HC-08	1	8 pan cover	00C32-013A-02
SPE48HC-10	1	10 pan cover	00C32-013A-03
SPE48HC-12	1	12 pan cover	00C32-013A-04
SPE60HC-08	1	8 pan cover	00C32-013A-02
SPE60HC-10	1	10 pan cover	00C32-013A-03
SPE60HC-12	1	12 pan cover	00C32-013A-04
SPE60HC-16	1	16 pan cover	00C32-013A-05
SPE72HC-08	1	8 pan cover	00C32-013A-02
SPE72HC-10	1	10 pan cover	00C32-013A-03
SPE72HC-12	1	12 pan cover	00C32-013A-04
CDE72UC 10	2	12 pan cover	00C32-013A-04
SPE72HC-18	2	6 pan cover	00C32-013A-01

NIGHT COVERS FOR MEGATOP PREP	COVERS REQUIRED	DESCRIPTION	PART NUMBER
SPE27HC-12M	1	12 pan cover	00C32-014A-03
SPE32HC-12M	1	12 pan cover	00C32-014A-01
SPE36HC-12M	1	12 pan cover	00C32-014A-01
SPE36HC-15M	1	15 pan cover	00C32-014A-04
SPE48HC-12M	1	12 pan cover	00C32-014A-01
SPE48HC-18M	1	18 pan cover	00C32-014A-02
SPE60HC-12M	1	12 pan cover	00C32-014A-01
SPE60HC-18M	1	18 pan cover	00C32-014A-02
SPE60HC-24M	2	12 pan cover (order two)	00C32-014A-01
SPE72HC-12M	1	12 pan cover	00C32-014A-01
SPE72HC-18M	1	18 pan cover	00C32-014A-02
SPE72HC-24M	2	12 pan cover (order two)	00C32-014A-01
CDETQUE 2014	2	12 pan cover	00C32-014A-01
SPE72HC-30M	2	18 pan cover	00C32-014A-02

NIGHT COVERS FOR PIZZA PREP	COVERS REQUIRED	DESCRIPTION	PART NUMBER
DP46HC	1	full cover	00C32-017A-03
DP60HC	1	full cover	00C32-022D-04
DP67HC	1	full cover	00C32-022D-01
DP72HC	1	full cover	00C32-022D-03
DP93HC	2	section cover (order two)	00C32-017A-01
DP119HC	2	kit contains left and right covers	00C32-022D-02

DESCRIPTION	PART NUMBER	
SALAD BAR - SNEEZE GUARDS		
Sneeze Guard	SPE36HC-S	00C23-160D-01
Sneeze Guard	SPE48HC-S	00C23-160D-02
Sneeze Guard	SPE60HC-S	00C23-160D-03
Sneeze Guard	SPE72HC-S	00C23-160D-04

SALAD BAR - SNEEZE GUARD EXTENSION WALL FOR SINGLE SIDE SERVICE								
Add-on wall for single side service	SPE36HC-S	00C23-162D-02						
Add-on wall for single side service	SPE48HC-S	00C23-162D-03						
Add-on wall for single side service	SPE60HC-S	00C23-162D-04						
Add-on wall for single side service	SPE72HC-S	00C23-162D-05						

SALAD BAR - FOLDING TRAY SLIDES		
Folding tray slide (order 2 for dual-side service)	SPE36HC-S	408-018D-36
Folding tray slide (order 2 for dual-side service)	SPE48HC-S	408-018D-48
Folding tray slide (order 2 for dual-side service)	SPE60HC-S	408-018D-60
Folding tray slide (order 2 for dual-side service)	SPE72HC-S	408-018D-72









WORKTOPS & UNDERCOUNTERS

FOUNDATION OF KITCHEN LAYOUTS BUILT TO PERFORM





Undercounters







Refrigerators & Freezers



Designed to perform in high ambient conditions

3 year parts and labor warranty with an additional 4 year compressor part warranty

Made in USA

Stainless steel top

Full electronic control

Self-closing doors

with 120° stay-open feature, on cartridge style hinges

Magnetic gasket

attached to each door for positive seal

Featuring environmentally friendly energy efficient R290 refrigerant

Two epoxy-coated steel wire shelves per section


Field-reversible doors

On select models

6" heavy duty casters

various ADA compliant mounting options



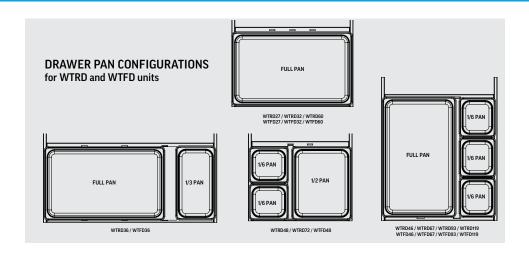



REMOVABLE BACKSPLASH available as an option, as well as a Flat Top, or a Foamed-in-Place backsplash



FIELD-REVERSIBLE DOORS for layout flexibility

EXTERIOR FINISHES

- Stainless steel with galvanized back
- · Stainless steel with stainless back

INTERIOR FINISHES

- · Corrosion-resistant aluminum
- · Stainless steel

AVAILABLE OPTIONS

- · Left hinge doors
- · Remote models available

AVAILABLE ACCESSORIES

- · Composite cutting boards (only available on rear-mounted worktops)
- · Bun tray rack
- · Door Locks (specify at time of order)
- Glass doors (rear-mount units only)
- 16-gauge stainless steel top

BACKSPLASH OPTIONS

- Removable
- 4" foamed-in-place
- Flat-top

MOUNTING OPTIONS

- 6" casters
- 3" casters
- 2.75" low-profile casters
- 1.25" roller-kit
- 6" legs

AGENCY CERTIFICATIONS







AVAILABLE IN REAR MOUNTED AND SIDE MOUNTED SYSTEMS, WITH SOLID OR GLASS DOORS







Rear-Mounted Refrigeration

REFRIGERATORS - REAR MOUNTED

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.


SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	BACKSPLASH
	WTR24AHC			24	32	33.63	115	1/6	2	5.16	REMOVABLE
1	WTR24AHC-FIP	_	1/2	24	32	33.63	115	1/6	2	5.16	FOAM
	WTR24AHC-FLT			24	32	29.63	115	1/6	2	5.16	FLAT TOP
_	WTR27AHC	_	1/2								
1	WTRD27AHC-2	2	_	27	32	33.63	115	1/6	2	6.13	REMOVABLE
	WTR27AHC-FIP	_	1/2	07	20	22.62	445	1/0		0.40	FOAN
1	WTRD27AHC-2-FIP	2	_	27	32	33.63	115	1/6	2	6.13	FOAM
	WTR27AHC-FLT	_	1/2	07	20	20.62	445	1/0		C 42	FLATTOR
1	WTRD27AHC-2-FLT	2	_	27	32	29.63	115	1/6	2	6.13	FLAT TOP
_	WTR32AHC	_	1/2	22	22	22.00	445	4 10	_	70	DEMOVA SUE
1	WTRD32AHC-2	2	-	32	32	33.63	115	1/6	2	7.2	REMOVABLE
	WTR32AHC-FIP	_	1/2	22	22	22.62	445	1/6	2	7.2	FOAM
1	WTRD32AHC-2-FIP	2	-	32	32	33.63	115				
1	WTR32AHC-FLT	_	1/2	20	20	20.62	115	1/6		70	FLAT TOP
	WTRD32AHC-2-FLT	2	-	32	2 32	29.63	115	1/0	2	7.2	TEATTOR
	WTR36AHC	_	2/4		20	22.62	445	1/0		0.5	DEMOVA DI E
2	WTRD36AHC-2	2	-	36	32	33.63	115	1/6	2	8.5	REMOVABLE
	WTR36AHC-FIP	_	2/4	20	22	22.62	445	1/0		0.5	FOAM
2	WTRD36AHC-2-FIP	2	-	36	32	33.63	115	1/6	2	8.5	FOAM
2	WTR36AHC-FLT	_	2/4	20	22	20.02	115	1/6	2	8.5	FLAT TOP
2	WTRD36AHC-2-FLT	2	-	36	32	29.63	115	1/6	2	8.5	FLATTUP
	WTR48AHC	_	2/4								
2	WTRD48AHC-2	2	1/2	48	32	33.63	115	1/6	2.2	11.82	REMOVABLE
	WTRD48AHC-4	4	_								
	WTR48AHC-FIP	_	2/4								
2	WTRD48AHC-2-FIP	2	1/2	48	32	33.63	115	1/6	2.2	11.82	FOAM
	WTRD48AHC-4-FIP	4	-								
	WTR48AHC-FLT	_	2/4								
2	WTRD48AHC-2-FLT	2	1/2	48	32	29.63	115	1/6	2.2	11.82	FLAT TOP
	WTRD48AHC-4-FLT	4	-								

REFRIGERATORS - REAR MOUNTED

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	BACK SPLASH
	WTR60AHC	_	2/4								
2	WTRD60AHC-2	2	1/2	60	32	33.63	115	1/5	3	14.75	REMOVABLE
	WTRD60AHC-4	4	_								
	WTR60AHC-FIP	_	2/4								
2	WTRD60AHC-2-FIP	2	1/2	60	32	33.63	115	1/5	3	14.75	FOAM
	WTRD60AHC-4-FIP	4	_								
	WTR60AHC-FLT	_	2/4								
2	WTRD60AHC-2-FLT	2	1/2	60	32	29.63	115	1/5	3	14.75	FLAT TOP
	WTRD60AHC-4-FLT	4	_								
	WTR72AHC	_	3/6					1/5	3	17.88	REMOVABLE
3	WTRD72AHC-2	2	2/4	72	32	33.63	115				
3	WTRD72AHC-4	4	1/2				115				
	WTRD72AHC-6	6	_								
	WTR72AHC-FIP	_	3/6								
3	WTRD72AHC-2-FIP	2	2/4	72	32	33.63	115	1/5	3	17.88	FOAM
3	WTRD72AHC-4-FIP	4	1/2	12	32	33.03	115	1/3	3	17.00	FOAM
	WTRD72AHC-6-FIP	6	_								
	WTR72AHC-FLT	_	3/6								
3	WTRD72AHC-2-FLT	2	2/4		32	29.63	115	1/5	3	17.88	FLAT TOP
3	WTRD72AHC-4-FLT	4	1/2	72	32	23.03	115				
	WTRD72AHC-6-FLT	6	-								

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.



ex: WTR48AHC





-FIP 4" foamed-in-place backsplash ex: WTR48AHC-FIP

-FLT Flat-top with no backsplash ex: WTR48AHC-FLT





Shallow Depth Refrigeration (Rear-Mounted)

REFRIGERATORS (SHALLOW DEPTH)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	BACK SPLASH
	WTR20HC	1/2	20	24.5	30.13	115	1/6	2	2.34	REMOVABLE
1	WTR20HC-FIP	1/2	20	24.5	30.13	115	1/6	2	2.34	FOAM
	WTR20HC-FLT	1/2	20	24.5	26.13	115	1/6	2	2.34	FLAT TOP
	WTR27HC	1/2	27	29.88	33.63	115	1/6	2	5.25	REMOVABLE
1	WTR27HC-FIP	1/2	27	29.88	33.63	115	1/6	2	5.25	FOAM
	WTR27HC-FLT	1/2	27	29.88	29.63	115	1/6	2	5.25	FLAT TOP
	WTR34HC	2/4	34	24.63	30.13	115	1/6	2	3.88	REMOVABLE
2	WTR34HC-FIP	2/4	34	24.63	30.13	115	1/6	2	3.88	FOAM
	WTR34HC-FLT	2/4	34	24.63	26.13	115	1/6	2	3.88	FLAT TOP









Rear-Mounted Freezers

FREEZERS - REAR MOUNTED

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	BACK SPLASH
	WTF24AHC			24	32	33.63	115	1/4	2.5	4.9	REMOVABLE
1	WTF24AHC-FIP	_	1/2	24	32	33.63	115	1/4	2.5	4.9	FOAM
	WTF24AHC-FLT			24	32	29.63	115	1/4	2.5	4.9	FLAT TOP
	WTF27AHC	_	1/2	07	20	22.62	445	4/4	0.5	0.40	DEMOVA DI E
1	WTFD27AHC-2	2	-	27	32	33.63	115	1/4	2.5	6.13	REMOVABLE
1	WTF27AHC-FIP	_	1/2	27	32	33.63	115	1/4	2.5	6.13	FOAM
•	WTFD27AHC-2-FIP	2	-	21	32	33.03	115	1/4	2.5	0.13	FUAM
1	WTF27AHC-FLT	_	1/2	27	32	29.63	115	1/4	2.5	6.13	FLAT TOP
•	WTFD27AHC-2-FLT	2	-	21	32	29.03	115	1/4	2.3	0.13	PLATTOP
1	WTF32AHC	_	1/2	32	32	33.63	115	1/3+	4	7.2	REMOVABLE
•	WTFD32AHC-2	2	_	32	32						
1	WTF32AHC-FIP	_	1/2	32	32	33.63	115	1/3+	4	7.2	FOAM
•	WTFD32AHC-2-FIP	2	-	32	J2	33.03	113	1,3.		7.2	TOAM
2	WTF32AHC-FLT	_	1/2	32	32	29.63	115	1/3+	4	7.2	FLAT TOP
	WTFD32AHC-2-FLT	2	-	JŁ	JŁ	25.05	110	1, 3	_	7.2	1 EAT TO
2	WTF36AHC	-	2/4	36	32	33.63	115	1/4	6	8.69	REMOVABLE
	WTFD36AHC-2	2	_	30	JŁ	33.03	113	","			KEMOVADEE
2	WTF36AHC-FIP	_	2/4	36	32	33.63	115	1/4	6	8.69	FOAM
	WTFD36AHC-2-FIP	2	-	30	JŁ	33.03	113	1,-4		0.03	TOAM
2	WTF36AHC-FLT	_	2/4	36	36 32	33.63	115	1/4	6	8.69	FLAT TOP
_	WTFD36AHC-2-FLT	2	-	30	JŁ	33.03	113	1/4	U	0.03	TEATTO

FREEZERS - REAR MOUNTED

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	BACKSPLASH	
	WTF48AHC	_	2/4									
2	WTFD48AHC-2	2	1/2	48	32	33.63	115	1/2	7	11.04	REMOVABLE	
	WTFD48AHC-4	4	-									
	WTF48AHC-FIP	_	2/4									
2	WTFD48AHC-2-FIP	2	1/2	48	32	33.63	115	1/2	7	11.04	FOAM	
	WTFD48AHC-4-FIP	4	_									
	WTF48AHC-FLT	_	2/4									
2	WTFD48AHC-2-FLT	2	1/2	48	32	29.63	115	1/2	7	11.04	FLAT TOP	
	WTFD48AHC-4-FLT	4	_									
	WTF60AHC	_	2/4									
2	WTFD60AHC-2	2	1/2	60	32	33.63	115	1/2	7	14.39	REMOVABLE	
	WTFD60AHC-4	4	_									
	WTF60AHC-FIP	_	2/4									
2	WTFD60AHC-2-FIP	2	1/2	60	32	33.63	115	1/2	7	14.39	FOAM	
	WTFD60AHC-4-FIP	4	_									
	WTF60AHC-FLT	-	2/4									
2	WTFD60AHC-2-FLT	2	1/2	60	60 32	32 29.6	29.63	115	1/2	7	14.39	FLAT TOP
	WTFD60AHC-4-FLT	4	_			20.03						





Shallow Depth Freezers (Rear-Mounted)

FREEZERS (SHALLOW DEPTH)

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

SECTIONS	MODEL#	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	BACK SPLASH
	WTF20HC	1/2	20	24.5	30.13	115	1/4	2.5	2.34	REMOVABLE
1	WTF20HC-FIP	1/2	20	24.5	30.13	115	1/4	2.5	2.34	FOAM
	WTF20HC-FLT	1/2	20	24.5	26.13	115	1/4	2.5	2.34	FLAT TOP
	WTF27HC	1/2	27	29.88	33.63	115	1/4	2.5	5.25	REMOVABLE
1	WTF27HC-FIP	1/2	27	29.88	33.63	115	1/4	2.5	5.25	FOAM
	WTF27HC-FLT	1/2	27	29.88	29.63	115	1/4	2.5	5.25	FLAT TOP

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.



ORDER YOUR UNIT TO YOUR SPECIFICATIONS WITH AVAILABLE OPTIONS SUCH AS:

GLASS DOORS (-25)

Increase visibilty by swapping the solid doors with glass doors on select refrigerator and freezer models.

3-INCH CASTERS (-23)

Lower the height of the unit for workflow or ADA compliance by selecting the 3-inch casters instead of the standard 6-inch ones.

Rear-Mounted Dual-Temps

DUAL-TEMPS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F (REFRIGERATOR), AND 0°F (FREEZER).

SECTIONS	MODEL#	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	BACK SPLASH
2	WTRF48AHC	2/4	40	22	22.62	445	R: 1/6	R: 2.0	L: 5.31	DEMOVADIE
2	WTFR48AHC	2/4	48	32	33.63	115	F: 1/4	F: 2.5	R: 5.31	REMOVABLE

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers. "RF" in the model # designates refrigerator on the left, freezer on the right. "FR" in the model # designates freezer on the left, refrigerator on the right.







Side-Mounted

REFRIGERATORS - SIDE MOUNTED

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	HP	AMPS	CUBIC FEET	BACK SPLASH
1	WTR41AHC	-	1/2	41	34	33.5	115	1/6	2.2	7.94	FOAM
1	WTR46AHC	-	1/2	46	34	33.5	115	1/6	3	10.8	FOAM
'	WTRD46AHC-2	2	-	40	34	33.3	115	1/6	3	10.0	FOAM
	WTR67AHC	-	2/4								
2	WTRD67AHC-2	2	1/2	67	34	33.5	115	1/5	3	18.97	FOAM
	WTRD67AHC-4	4	-								
	WTR93AHC	-	3/6								
3	WTRD93AHC-2	2	2/4	93	34	33.5	115	1/3	5	29.7	FOAM
3	WTRD93AHC-4	4	1/2	33	34	33.3	115		3	25.7	FOAM
	WTRD93AHC-6	6	-								
	WTR119AHC	-	4/8								
	WTRD119AHC-2	2	3/6								
4	WTRD119AHC-4	4	2/4	119	34	33.5	115	1/3	5	40.12	FOAM
	WTRD119AHC-6	6	1/2								
	WTRD119AHC-8	8	-								

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

FREEZERS - SIDE MOUNTED

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	HP	AMPS	CUBIC FEET	BACK SPLASH
2	WTF67AHC	-	2/4	67	34	33.5	115	3/4	8.9	20.8	FOAM

REAR MOUNT VERSUS SIDE MOUNT

REAR MOUNTED COMPRESSOR UNITS

Worktops and undercounter units that have a rear mounted compressor offer the advantage of a compressed footprint on the kitchen floorplan.



WTRD72AHC-4

SIDE MOUNTED COMPRESSOR UNITS

Worktops and undercounter units that have a side mounted compressor are a little wider than rear mounted units, but gain a considerable amount of interior cubic capacity.



WTRD93AHC-4





UNDERCOUNTERS

Refrigerators & Freezers



Designed to perform in high ambient conditions

3 year parts and labor warranty with an additional 4 year compressor part warranty

Made in USA

Undercounter units feature a 1/2" thick sub-top

Full electronic control

Interior thermometer

Self-closing doors

with 120° stay-open feature, on cartridge style hinges

Easy door removal for service and cleaning

Magnetic gasket attached to each door

for positive seal

6" heavy duty casters standard

3" casters or 6" leg option available at no charge when specified on order


Two epoxy-coated steel wire shelves

per section

Field-reversible doors

On select models



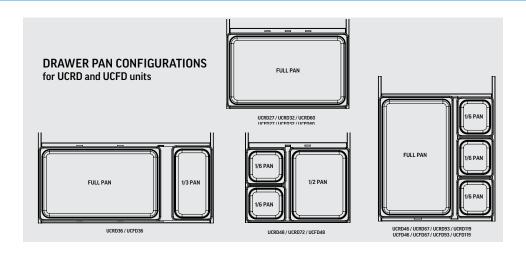



EXTERIOR FINISHES

- · Stainless steel with galvanized back
- · Stainless steel with stainless back

INTERIOR FINISHES

- · Corrosion-resistant aluminum
- · Stainless steel

AVAILABLE OPTIONS

- · Left hinge doors
- · Remote models available
- Glass doors (rear-mount units only)

AVAILABLE ACCESSORIES

- Bun tray rack
- · Locks (doors only, spec at time of order)

MOUNTING OPTIONS

- · 6" casters
- · 3" casters (allows for ADA compliant working height)
- 6" legs

AGENCY CERTIFICATIONS







AVAILABLE IN REAR MOUNTED AND SIDE MOUNTED SYSTEMS, WITH SOLID OR GLASS DOORS







UNDERCOUNTERS

Rear-Mounted Refrigeration

REFRIGERATORS - REAR MOUNTED

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	HP	AMPS	CUBIC FEET
1	UCR24AHC	_	1/2	24	32	28.63	115	1/10	2	5.16
1	UCR27AHC	_	1/2	27	32	28.63	115	1/10	2	6.13
ı	UCRD27AHC-2	2	_	21	32	20.03	115	1/10	2	6.13
1	UCR32AHC	_	1/2	32	32	28.63	115	1/10	2	7.2
ı	UCRD32AHC-2	2	_	32	32	28.03	115	1/10	2	7.2
	UCR36AHC	_	2/4	20	22	20.62	445	1/0	_	8.5
2	UCRD36AHC-2	2	_	36	32	28.63	115	1/6	2	8.5
	UCR48AHC	_	2/4							11.82
2	UCRD48AHC-2	2	1/2	48	32	28.63	115	1/6	2	11.6
	UCRD48AHC-4	4	_							11.6
	UCR60AHC	_	2/4							14.75
2	UCRD60AHC-2	2	1/2	60	32	28.63	115	1/5	3	14.4
	UCRD60AHC-4	4	_							14.4
	UCR72AHC	_	3/6							17.88
	UCRD72AHC-2	2	2/4	70	20	20.00	445	4/5		17.1
3	UCRD72AHC-4	4	1/2	72	32	28.63	115	1/5	3	17.1
	UCRD72AHC-6	6	_							17.1

Shallow Depth Refrigeration (Rear-Mounted)

REFRIGERATORS (SHALLOW DEPTH)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1	UCR20HC	1/2	20	24.5	25.13	115	1/10	2	2.25
1	UCR24HC	1/2	24	29.88	28.63	115	1/10	2	4.48
1	UCR27HC	1/2	27	29.88	28.63	115	1/10	2	5.25
2	UCR34HC	2/2	34	24.63	25.13	115	1/10	2	5.96







UNDERCOUNTERS

Rear-Mounted Freezers

FREEZERS - REAR MOUNTED

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1	UCF24AHC	_	1/2	24	32	28.63	115	1/4	2.5	4.9
_	UCF27AHC	_	1/2	27	22	20.02	445	1/4	2.5	6.13
1	UCFD27AHC-2	2	_	27	32	28.63	115	1/4	2.5	6.13
1	UCF32AHC	_	1/2	32	32	28.63	115	1/3+	4	7.2
ı	UCFD32AHC-2	2	-	32	32	28.03	115	1/3+	4	7.2
2	UCF36AHC	_	2/4	36	32	28.63	115	1/2	6	8.7
2	UCFD36AHC-2	2	_	30	32	20.03	115	1/2	0	8.7
	UCF48AHC	_	2/4							11.04
2	UCFD48AHC-2	2	1/2	48	32	28.63	115	1/2	7	11.6
	UCFD48AHC-4	4	_							11.6
	UCF60AHC	_	2/4							14.39
2	UCFD60AHC-2	2	1/2	60	32	28.63	115	1/2	7	15.8
	UCFD60AHC-4	4	_							15.8

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

Shallow Depth Freezers (Rear-Mounted)

FREEZERS (SHALLOW DEPTH)

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

SECTIONS	MODEL#	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
1	UCF20HC	1/2	20	24.5	25.13	115	1/4	2.5	2.34
1	UCF24HC	1/2	24	29.88	28.63	115	1/4	2.5	4.53
1	UCF27HC	1/2	27	29.88	28.63	115	1/4	2.5	5.25

Rear-Mounted Dual-Temps

DUAL-TEMPS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F (REFRIGERATOR), AND 0°F (FREEZER).

SECTIONS	MODEL#	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	HP	AMPS	CUBIC FEET
	UCRF48AHC	2/4	40	22	20.02	445	R: 1/6	R: 2.0	L: 5.31
2	UCFR48AHC	2/4	48	32	28.63	115	F: 1/4	F: 2.5	R: 5.31

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers. "RF" in the model # designates refrigerator on the left, freezer on the right. "FR" in the model # designates freezer on the left, refrigerator on the right.







UNDERCOUNTERS

Side-Mounted

REFRIGERATORS - SIDE MOUNTED

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DRAWERS	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	HP	AMPS	CUBIC FEET
1	UCR41AHC	-	1/2	41	34.75	28.5	115	1/5	2	7.94
1	UCR46AHC	-	1/2	46	2475	28.5	115	1/5	2	10.8
•	UCRD46AHC-2	2	_	40	34.75	20.3	115	1/5	2	10.8
	UCR67AHC	-	2/4							18.97
2	UCRD67AHC-2	2	1/2	67	34.75	28.5	115	1/5	2	19.2
	UCRD67AHC-4	4	_							19.2
	UCR93AHC	-	3/6							29.7
3	UCRD93AHC-2	2	2/4	93	34.75	28.5	115	1/3	5	29.7
3	UCRD93AHC-4	4	1/2	33	34./3	20.3	115	1/3	5	29.7
	UCRD93AHC-6	6	_							29.7
	UCR119AHC	-	4/8							40.12
	UCRD119AHC-2	2	3/6							40.5
4	UCRD119AHC-4	4	2/4	119	34.75	28.5	115	1/3	5	40.5
	UCRD119AHC-6	6	1/2							40.5
	UCRD119AHC-8	8	-							40.5

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

FREEZERS - SIDE MOUNTED

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

SECTIONS	MODEL#	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET
2	UCF67AHC	2/4	67	34.75	28.5	115	3/4	6.4	20.8







Worktop & Undercounter Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING/ORGANIZERS		
Epoxy Coated Wire Shelf (Large)	UCF/UCR/WTF/WTR27A	403-826B
Epoxy Coated Wire Shelf (Small)	UCF/UCR/WTF/WTR27A	403-912D-01
Epoxy Coated Wire Shelf (Large)	UCF/UCR/WTF/WTR36A	403-911D-01
Epoxy Coated Wire Shelf (Small)	UCF/UCR/WTF/WTR36A	403-915D-01
Epoxy Coated Wire Shelf (Large)	UCF/UCR/WTF/WTR48A	403-828B
Epoxy Coated Wire Shelf (Small)	UCF/UCR/WTF/WTR48A	403-913D-01
Epoxy Coated Wire Shelf (Large)	UCF/UCR/WTF/WTR60A	403-829B
Epoxy Coated Wire Shelf (Small)	UCF/UCR/WTF/WTR60A	403-914D-01
Epoxy Coated Ctr Section Wire Shelf (Large)	UCR/WTR72A	403-827B
Epoxy Coated Wire Shelf L&R (Large)	UCR/WTR72A	403-828B
Epoxy Coated Ctr Section Wire Shelf (Small)	UCR/WTR72A	403-912D-01
Epoxy Coated Wire Shelf L&R (Small)	UCR/WTR72A	403-913D-01
Epoxy Coated Wire Shelf	UCR46A/67A, UCF67A	403-834D
Epoxy Coated Wire Shelf	UCR93A/119A	403-834D
Epoxy Coated Wire Shelf	WTR41/46/67A/93A	403-834D
Epoxy Coated Wire Shelf	WTR119A, WTF67A	403-834D
Epoxy Coated Wire Shelf	UCF/UCR/WTR20	403-419D
Epoxy Coated Wire Shelf	UCR/WTR34Y	403-339D
Epoxy Coated Wire Shelf	UCR/UCF/WTF/WTR27 Shallow Depth	403-294D
Shelf Clip	UCR/WTR/UCRD/WTRD	403-169A
Large Wire Shelf Divider	WTR27A/UCR27A	403-722C
Small Wire Shelf Divider	WTR27A/UCR27A	403-721C
Large Wire Shelf Divider	WTR36A, UCR36A	403-723C
Small Wire Shelf Divider	WTR36A, UCR36A	403-721C
Large Wire Shelf Divider	WTR48A/UCR48A	403-723C
Small Wire Shelf Divider	WTR48A/UCR48A	403-721C
arge Wire Shelf Divider	WTR60A/UCR60A	403-723C
Small Wire Shelf Divider	WTR60A/UCR60A	403-721C
arge Wire Shelf Divider	WTR72A/UCR72A	403-723C
Small Wire Shelf Divider	WTR72A/UCR72A	403-721C

STACKING COLLARS		
Stacking Collar	UCR20HC, UCF20HC	00C32-015A-01
Wall Mount Shelf	UCR20HC, UCF20HC (3/16" anchors recommended for mounting)	00A24-136D-05
Stacking Collar	UCR27HC, UCF27HC	00C32-004A
Stacking Collar	UCR27AHC, UCF27AHC	00C32-012A

DESCRIPTION	UNIT(S)	PART NUMBER
MOUNTING		
3" Caster	UCR20,UCF20,UCR27,UCF27,UCR34	00C31-041A
6" Caster	UCR20,UCF20,UCR27,UCF27,UCR34	00C31-038A
3" Caster	29" Undercounter/Worktop (set of four)	00C31-041A
6" Caster	29" Undercounter/Worktop (set of four)	00C31-038A
3" Caster	32" Undercounter/Worktop (set of four)	61C01-013A
6" Caster	32" Undercounter/Worktop (set of four)	61C01-001A
3" Caster	UCR/WTR 119A (set of six)	61C01-012A
6" Black Leg	29" Undercounter/Worktop (set of four)	58B02-001A
6" Black Leg	32" Undercounter/Worktop (set of four)	58B02-001A
6" Black Leg	UCR/WTR 119A (set of six)	58B02S002A
6" Seismic/Flanged Legs	29" WT/UC (set of four)	00C31-055A
6" Seismic/Flanged Legs	32" WT/UC (set of four)	00C31-055A
6" Seismic/Flanged Legs	UC Shallow Depth (set of four)	00C31-055A
2 3/4 in Caster Kit	WT/UC	00C31-049A
2" Roller Kit	WT/UC	00C31-045A

WORKTOP WHITE POLY CUTTING BOARDS (1/2" THICK)								
Set of (2) Brackets Required	00C23-076A-01							
29" Cutting Board	WTR27A/WTF27A	705-397D-05						
29" Cutting Board	WTR36A/WTF36A	705-397D-19						
29" Cutting Board	WTR48A/WTF48A	705-397D-06						
29" Cutting Board	WTR60A/WTF60A	705-397D-07						
29" Cutting Board	WTR72A/WTF72A	705-397D-08						

COMPOSITE CUTTING BOARDS (1/2" THICK)								
Set of (2) Brackets Required	All Units	00C23-076A-01						
Composite Cutting Board	WTR27A/WTF27A	705-397D-03						
Composite Cutting Board	WTR36A/WTF36A	705-397D-17						
Composite Cutting Board	WTR41	705-397D-18						
Composite Cutting Board	WTR48A/WTF48A	705-397D-02						
Composite Cutting Board	WTR60A/WTF60A	705-397D-04						
Composite Cutting Board	WTR72A	705-397D-01						

ADDITIONAL ACC	ESSORIES		
Door Lock (solid	doors only)	UCR,WTR (per door; solid doors only)	00C30-099A







CHEF BASES

AMPLE COLD STORAGE WHILE SUPPORTING WORK SPACES







CHEF BASES

Refrigerators & Freezers



Designed to perform in high ambient conditions

3 year parts and labor warranty with an additional 4 year compressor part warranty

LIFETIME WARRANTY on all drawers and slides (parts only)

12-gauge stainless steel drawer slides with Delrin° rollers rated at 275 lbs

Heavy-duty, fireproof, reinforced, insulated 16-gauge top with fully integrated heat-shield (must adhere to manufacturer's clearance)

Compressor available on left or right side (specify at time of order)

Consistent product temperature with intelligent airflow design

Improved drawer systems for easier installation, field adjustment, and increased pan capacity

Full refrigeration system serviceability from the front of the cabinet, eliminating the need to remove the lid

Accommodates 6-inch-deep full-size food service pans in top & bottom drawers

Featuring environmentally friendly energy-efficient R290 refrigerant





Optional overhang top

(up to 6-inches on either side)



12-GAUGE DRAWER SLIDES with 3 Delrin encased stainless steel roller bearings per each drawer slide



ACCOMMODATES 6" PANS IN top and bottom drawers

EXTERIOR FINISHES

· Stainless steel with galvanized back

INTERIOR FINISHES

- · Corrosion-resistant aluminum
- · Stainless steel

AVAILABLE OPTIONS

- Flat Top edge in lieu of marine edge on standard sizes
- · Remote models available

AVAILABLE ACCESSORIES

- Custom flat top sizes available, up to 6" overhang on either side to create a custom sized top
- · Gasket guards

MOUNTING OPTIONS

- 6" casters
- 3" casters (allows for ADA compliant working height)
- 6" legs

AGENCY CERTIFICATIONS










CHEF BASES

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DRAWERS	TOP WIDTH	CABINET WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	FULL SIZE PAN CAPACITY
1	WTRCS36HC	2 small	36	36	34.75	1.75 24.38	115	1/6	1.7	5.64	4
	WTRCS36HC-48		48		0 11.2 0			., •	,	0.0 .	
1	WTRCS48HC	2 medium	48	48	34.75	24.38	115	1/6	1.7	8.59	4
1	WTRCS52HC	2 large	52	52	34.75	24.38	115	1/6	17	0.50	c
'	WTRCS52HC-60	Ziarge	60	32	34./3	24.30	115	1/6	1.7	9.58	6
1	WTRCS60HC	2 X-large	60	60	34.75	24.38	115	1/6	1.7	11.55	6
•	WTRCS60HC-64	Z A-lai ge	64	60	34./5	24.38					
2	WTRCS72HC	4 medium	72	72	34.75	24.38	115	1/3	5	14.51	8
	WTRCS72HC-76		76								
	WTRCS84HC		84		34.75	24.38	115	1/3	5	17.46	10
2	WTRCS84HC-89	2 medium 2 X-large	89	84							
	WTRCS84HC-96		96								
2	WTRCS96HC	4 X-large	96	96	24 7F	24.38	115	1/3	5	20.42	12
2	WTRCS96HC-108	4 A-large	108	30	96 34.75		115			20.42	
3	WTRCS112HC	4 medium	112	112	2475	34.75 24.38	115	1/3	5	24.36	14
	WTRCS112HC-120	2 large	120		34./3						

Height measurement includes casters. Depth measurement includes handles and rear bumpers.

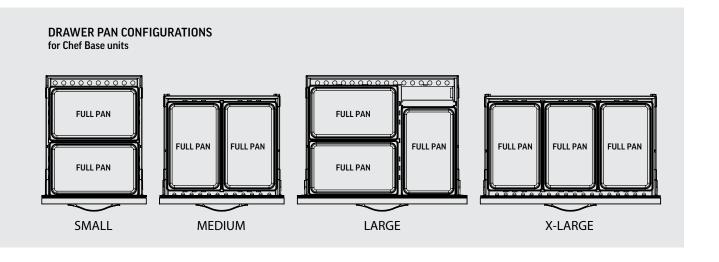

FREEZERS

MAINTAINS PRODUCT TEMPERATURE AT -10° F AND BELOW.

SECTIONS	MODEL#	DRAWERS	TOP WIDTH	CABINET WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	FULL SIZE PAN CAPACITY
1	WTFCS36HC	2 small	36	36	0475	04.00	445	1/2		5.64	4
	WTFCS36HC-48	Z Silidii	48	30	34.75	24.38	115		4.5		
1	WTFCS48HC	2 medium	48	48	34.75	24.38	115	1/2	4.5	8.59	4
1	WTFCS52HC	2 large	52		34.75	24.38	115	1/2	4.5	9.58	6
	WTFCS52HC-60	Z lai ge	60	52	34./3	24.30	115				
1	WTFCS60HC	2 X-large	60	60	34.75	24.38	115	3/4	6.5	11.55	6
•	WTFCS60HC-64	Z A-large	64								
2	WTFCS72HC	4 medium	72 76	72	34.75	24.38	115	3/4	6.5	14.51	8
	WTFCS72HC-76	4 medium									
	WTFCS84HC		84								
2	WTFCS84HC-89	2 medium 2 X-large	89		34.75 24.38	115	3/4	6.5	17.46	10	
	WTFCS84HC-96		96								
2	WTFCS96HC	4 V laws	96		34.75	24.38	115	3/4	6.5	20.42	12
	WTFCS96HC-108	4 X-large	108	96							

Height measurement includes casters. Depth measurement includes handles and rear bumpers.









BAR & WINE EQUIPMENT

DYNAMIC PERFORMANCE THAT ENHANCES THE FRONT OF THE HOUSE



Direct Draws / Bar Mobiles



Back Bar Coolers



Bottle Coolers



Glass & Plate Chillers





DIRECT DRAWS



3-IN-1 DRAFT SOLUTIONS

Dispense beer, wine, or coffee (other non-alcoholic beverages) with the same tap—no line/manifold changes needed!

Wide variety of options and accessories

3 year parts and labor warranty with an additional 4 year compressor part warranty

Made in USA

Stainless steel top with drip tray

Galvanized steel interior liner

with heavy duty stainless steel floor

Full electronic control

Drain tube located at bottom front of cooler

connects to floor drain

Self-closing doors with locks

Magnetic gasket attached to each door

for positive seal

Field-reversible door

Compressor available on left or right side

specify at time of order



LEFT OR RIGHT COMPRESSOR

Specify which side the compressor should be located at time of order



DRAIN TUBE

bottom front of cooler (condensor side) and connects directly to floor drain

REFRIGERATED UNITS


MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS	# OF STRAIGHT WALL KEGS	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
1	DD24HC-1-B DD24HC-1-S	- 1	1	24	30.13	37.75	115	1/6	2	7.66	BLACK STAINLESS FRONT
1	DD36HC-1-B DD36HC-1-S	- 1	1	36	24.5	36	115	1/4	2.5	8.31	BLACK STAINLESS
2	DD48HC-1-B DD48HC-1-S	2	2	48	24.5	36	115	1/4	2.50	12.4	BLACK STAINLESS
2	DD50HC-1-B DD50HC-1-S	2	2	50.5	29	37.38	115	1/4	2.50	17.86	BLACK STAINLESS FRONT
2	DD58HC-1-B DD58HC-1-S	2	3	59	29	37.38	115	1/4	2.50	21.86	BLACK STAINLESS FRONT
2	DD68HC-1-B DD68HC-1-S	2	3	69	29	37.38	115	1/3	5.5	25.93	BLACK STAINLESS FRONT
3	DD72HC-1-B DD72HC-1-S	3	3	72	24.5	36	115	1/3	3.1	19.95	BLACK STAINLESS
3	DD78HC-1-B DD78HC-1-S	3	4	79	29	37.38	115	1/3	5.5	33.59	BLACK STAINLESS FRONT
3	DD94HC-1-B DD94HC-1-S	3	5	95	29	37.38	115	1/3	5.5	37.82	BLACK STAINLESS FRONT

Depth measurement includes handles. Height measurement includes mounting height (DD24 only), but excludes tap height. Add average tap height of 15" for total unit height.

12-Tap Tower Option

Available for DD78 and DD94.



Club Top Option

Adds sliding lid(s) to top. Available for DD50, DD58 and DD68.



EXTERIOR FINISHES

- Black
- · Stainless Steel

INTERIOR FINISHES

- · Galvanized walls with reinforced stainless steel floor
- Stainless steel

AVAILABLE OPTIONS

- · Left or right side compressor
- · Remote models available

AVAILABLE ACCESSORIES

- · Wine Models
- Wine Taps
- Faucet Locks
- · Glass Rinser • 1-6 Insulated Stainless Towers/Taps
- Optional 12 Tap Tower for DD78 & 94
- Dual Tap Placement Option
- No Draft Arm with Hole Cover
- · Club Top available on DD50,58, & 68

MOUNTING OPTIONS

- 6" casters
- 3" casters
- 6" legs

AGENCY CERTIFICATIONS









DIRECT DRAWS

Keg Capacities



RC-500 SERIES RAPID CHILL GLASS FROSTER

Freeze any type of glass in a flash

Ideal for chilling beer, champagne, wine, and cocktail glasses

Also ideal for chilling the exterior of bottles

Simply push down on the froster head to dispense jet of CO2

Neon, color changing lights illuminate the glass as you frost

Does not taint the taste of drinks

RC-500 mounts to any table or bar counter

Sterilizes the glass due to the cooling process, for a more hygienic drink service

Will not affect the carbonation or temperature of drinks

No need for electrical connection, for greater portability and practicality

LED lights require (2) AA batteries

Requires food grade CO2 cylinders with liquid dip tube (siphon tank)

MODEL#	WIDTH	DEPTH	HEIGHT	CRATED WEIGHT
RC-500	10.63	5.11	16.14	12







BAR MOBILES



Wide variety of options and accessories

3 year parts and labor warranty with an additional 4 year compressor part warranty

Made in USA

Stainless steel drip tray for easy cleaning

Heavy-duty stainless steel floor

Stainless steel top with black glass rails

4" casters

Full electronic control

Interior thermometer

Tower has continuous source of cold air

Portable unit with waste bottle

for beer and wine from drain

Self-closing doors with locks

Field-reversible door

Magnetic gasket attached to each door

for positive seal



PORTABLE WASTE BOTTLE for beer and wine from drain



STAINLESS STEEL DRIP TRAY for easy cleaning

REFRIGERATED UNITS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS	# OF STRAIGHT WALL KEGS	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
	ВМ23НС-В	1	1	24	30.13	53	115	1/6	2	7.66	BLACK
	BM23HC-B-28	1	1	24	30.13	39.37	115	1/6	2	7.66	BLACK
1	BM23HC-S-31	1	1	24	30.13	53	115	1/6	2	7.66	STAINLESS
	ВМ23НС-С-В	1	1	24	30.13	53.25	115	1/6	2	7.66	BLACK
	вм23нс-с-ѕ	1	1	24	30.13	53.25	115	1/6	2	7.66	STAINLESS

Depth measurement includes handles. Height measurement includes mounting height and tap height if applicable.

DUAL ZONE Not intended for beer/beer configuration.

LEFT COMPARTMENT MAINTAINS 32-40°F. RIGHT COMPARTMENT MAINTAINS 50-65°F.

SECTIONS	MODEL#	DOORS	# OF STRAIGHT WALL KEGS	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
	DZ24-1-B	4	(4) 1/C	24	20.12	Fo	115	1/5	4	710	BLACK
I	DZ24-1-S	•	(4) 1/6	24	30.13	53	115	1/5	4	7.12	STAINLESS

Depth measurement includes handles. Height measurement includes mounting height and tap height if applicable.

EXTERIOR FINISHES

- Black
- Stainless Steel

INTERIOR FINISHES

- · Galvanized walls with reinforced stainless steel floor
- Stainless steel

AVAILABLE OPTIONS

· Outdoor approved unit available (BM23 only)

AVAILABLE ACCESSORIES

- Club top (BM23 only)
- 1-4 insulated stainless towers/taps
- Wine models available
- 2, 3, or 4-way manifolds
- Faucet locks
- · No draft arm with hole cover

MOUNTING OPTIONS

· 4" casters

AGENCY CERTIFICATIONS









BACK BAR COOLERS



Wide variety of options and accessories

3 year parts and labor warranty with an additional 4 year compressor part warranty

Made in USA

Galvanized Steel Interior

Stainless Steel Floor

Full electronic control

Compressor Available on Left or Right Side

specify at time of order right side only on pass-thru models

LED Lighting

Two Epoxy Coated Shelves per section

Stay Open Door and Locks

Field-reversible Doors

on select models

Sliding Glass Doors

on select models (door frames only come in black)

Pass Thru Models Available


Magnetic gasket attached to each door

for positive seal



DOOR OPTIONS

- · Solid doors (hinged)
- · Glass doors (hinged)
- · Glass doors (sliding)

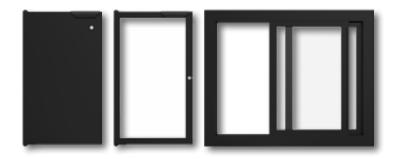



LEFT OR RIGHT COMPRESSOR Specify which side the compressor should be located at time of order; right side only on pass-thru's



OPEN FOOD RATED MODELS for increased storage options

EXTERIOR FINISHES

- Black
- Stainless Steel front/sides
- · Stainless steel front with gray painted steel sides

INTERIOR FINISHES

- · Galvanized steel with reinforced stainless steel floor
- Stainless steel

AVAILABLE OPTIONS

- · Left or right side compressor (right side only on pass-thru's)
- · Remote models available

AVAILABLE ACCESSORIES

- · Wine models available
- Food rated models
- · Glass door
- Stainless steel top and galvanized subtops available
- Extra shelves

MOUNTING OPTIONS

- 6" casters
- · 3" casters
- 6" legs

AGENCY CERTIFICATIONS



AVAILABLE IN REACH-IN OR PASS-THRU, WITH OR WITHOUT TOP, WITH OR WITHOUT OPEN FOOD RATED







BACK BAR COOLERS

Standard

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS/ SHELVES	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK Bottles	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
	ВВ24НС-1-В	1/0		180	140	110	24	30.13	27.75	115	1/6		7.66	BLACK
1	BB24HC-1-S	1/2	1	180	140	110	24	30.13	37.75	115	1/6	2	7.00	STAINLESS FRONT
1	ВВЗ6НС-1-В	1/0	1	240	220	170	36	24.5	34	115	1/4	2.5	8.31	BLACK
•	ВВ36HC-1-S	1/2	l	240	220	170	30	24.5	34	115	1/4	2.5	8.31	STAINLESS
1	BB36HC-1-B-27	1/2	1	240	220	170	36	24.5	36	115	1/4	2.5	8.31	BLACK
•	BB36HC-1-S-27	1/2	ı	240	220	170	30	24.5	30	115	1/4	2.5	0.31	STAINLESS
	BB48HC-1-B	2/4		288	300	325	48	24.5	34	115	1/4	2.5	12.4	BLACK
2	BB48HC-1-S	2/4	2	288	300	325	48	24.5	34	115	1/4	2.5	12.4	STAINLESS
2	BB48HC-1-B-27	2/4	2	288	300	325	48	24.5	36	115	1/4	2.5	12.4	BLACK
	BB48HC-1-S-27	2/4	2	200	300	323	40	24.5	30	115	1/4	2.5	12.4	STAINLESS
2	BB58HC-1-B	2/4	2	528	440	365	59	29.13	37.25	115	1/4	2.5	21.86	BLACK
2	BB58HC-1-S	2/4	2	520	440	303	33	25.13	37.23	115	1/4	2.5	21.00	STAINLESS FRONT
2	BB68HC-1-B	2/4	3	672	550	435	69	29.13	37.25	115	1/3	5.3	25.93	BLACK
	BB68HC-1-S	2/4	3	672	550	433	03	25.13	37.23	115	1/3	5.5	25.55	STAINLESS FRONT
3	BB72HC-1-B	3/6	3	540	480	505	72	24.5	34	115	1/3	3.1	19.92	BLACK
3	BB72HC-1-S	3/0	3	540	400	505	12	24.5	34	115	1/3	3.1	19.92	STAINLESS
3	BB72HC-1-B-27	3/6	3	540	480	505	72	24.5	36	115	1/3	3.1	19.92	BLACK
3	BB72HC-1-S-27	3/0	3	540	400	303	12	24.5	30	115	1/3	3.1	15.52	STAINLESS
3	ВВ78НС-1-В	3/6	4	740	630	560	79	29.13	37.25	115	1/3	5.5	33.59	BLACK
3	BB78HC-1-S	3/0	4	740	030	300	/3	23.13	37.23	115	1/3	5.5	33.39	STAINLESS FRONT
3	ВВ94НС-1-В	3/6	5	920	785	675	95	29.13	37.25	115	1/3	5.5	37.82	BLACK
3	ВВ94НС-1-S	3/0	5	920	765	0/3	90	25.13	37.23	113	1/3	5.5	37.02	STAINLESS FRONT

Depth measurement includes handles. BB24 height measurement includes mounting height.

AVAILABLE TOPS



1.5-INCH STAINLESS STEEL TOP indicated with green model # example: BB58HC-1-B



2-INCH STAINLESS STEEL TOP indicated with black model # and "-27" example: BB48HC-1-B-27



GALVANIZED SUB-TOP indicated with black model # example: BB48HC-1-B

GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS/ SHELVES	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK Bottles	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
1	BB24HC-1-G-B	1/2	1	180	140	110	24	30.13	37.75	115	1/6	2	7.66	BLACK STAINLESS
	BB24HC-1-G-S	·				-								FRONT
1	BB36HC-1-G-B	1/2	1	240	220	170	36	24.5	34	115	1/4	2.5	8.36	BLACK
	BB36HC-1-G-S	,,_	-			., •								STAINLESS
1	BB36HC-1-G-B-27	1/2	1	240	220	170	36	24.5	36	115	1/4	2.5	8.36	BLACK
•	BB36HC-1-G-S-27	., _	·	L-10	220	., 0	30	2-1.0	30	110	., -	2.0	0.00	STAINLESS
2	BB48HC-1-G-B	2/4	2	288	300	325	48	24.5	34	115	1/4	2.5	12.4	BLACK
	BB48HC-1-G-S	2/4			300	323	70	24.5	J-1			2.3	12.7	STAINLESS
2	BB48HC-1-G-B-27	2/4	2	288	300	325	48	24.5	36	115	1/4	2.5	12.4	BLACK
_	BB48HC-1-G-S-27	2,4	_	200	300	323	70	2-1.0	30	110	.,-	2.0	12.7	STAINLESS
2	BB58HC-1-G-B	2/4	2	528	440	365	59	29.13	37.25	115	1/4	2.5	21.86	BLACK
_	BB58HC-1-G-S	2,4	_	320	440	303	33	23.13	J7.LJ	110	.,	2.0	21.00	STAINLESS FRONT
2	BB68HC-1-G-B	2/4	3	672	550	435	69	29.13	37.25	115	1/3	5.3	25.93	BLACK
	BB68HC-1-G-S	2/4	3	072	330	433	03	23.13	37.23	113	1,3	3.3	25.55	STAINLESS FRONT
3	BB72HC-1-G-B	3/6	3	540	480	505	72	24.5	34	115	1/3	3.1	19.92	BLACK
	BB72HC-1-G-S	3/0	3	J40	400	303	,,	24.3	J4	113	1/3	3.1	13.32	STAINLESS
3	BB72HC-1-G-B-27	3/6	3	540	480	505	72	24.5	36	115	1/3	3.1	19.92	BLACK
•	BB72HC-1-G-S-27	3/0	3	340	400	303	, _	24.5	Ju	113	1, 3	3.1	13.32	STAINLESS
3	BB78HC-1-G-B	3/6	4	740	630	560	79	29.13	37.25	115	1/3	5.5	33.59	BLACK
	BB78HC-1-G-S	3/0	4	/40	030	300	/5	23.13	37.23	113	1/3	3.3	33.35	STAINLESS FRONT
3	ВВ94НС-1-G-В	3/6	5	920	785	675	95	29.13	37.25	115	1/3	5.5	37.82	BLACK
3	BB94HC-1-G-S	3/0	3	920	765	0/3	90	25.13	37.23	115	1/3	5.5	37.02	STAINLESS FRONT

Depth measurement includes handles. BB24 height measurement includes mounting height.

GLASS DOORS (SLIDING) (Door frame only comes in black)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS/ SHELVES	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK Bottles	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
	BB48HC-1-GS-B	0/4		200	200	205	40	00.00	24	445	4/4	0.5	40.4	BLACK
2	BB48HC-1-GS-S	2/4	2	288	300	325	48	23.63	34	115	1/4	2.5	12.4	STAINLESS
2	BB48HC-1-GS-B-27	2/4	2	288	300	225	40	00.00	20	445	4/4	2.5	10.4	BLACK
	BB48HC-1-GS-S-27	2/4	2	288	300	325	48	23.63	36	115	1/4	2.5	12.4	STAINLESS
2	BB58HC-1-GS-B	2/4	2	528	440	365	59	28.25	27.25	445	1/4	2.5	24.00	BLACK
2	BB58HC-1-GS-S	2/4	2	528	440	305	29	28.23	37.25	115	1/4	2.5	21.86	STAINLESS FRONT
	BB72HC-1-GS-B	2/0	2	F 40	400	505	70	00.00	24	445	1/0	2.4	40.00	BLACK
3	BB72HC-1-GS-S	3/6	3	540	480	505	72	23.63	34	115	1/3	3.1	19.92	STAINLESS
	BB72HC-1-GS-B-27	2/0	_	F 40	400	505	70	00.00	20	445	1/0	2.4	40.00	BLACK
3	BB72HC-1-GS-S-27	3/6	3	540	480	505	72	23.63	36	115	1/3	3.1	19.92	STAINLESS

Depth measurement includes handles







BACK BAR COOLERS

Standard Pass-thru

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS/ SHELVES	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK Bottles	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
	ВВ48НС-1-РТ-В	4/4		200	200	225	40	27.38	24	445	1/0	2.4	10.0	BLACK
2	BB48HC-1-PT-S	4/4	2	288	300	325	48	27.38	34	115	1/3	3.1	13.6	STAINLESS
	BB48HC-1-PT-B-27	4/4	2	200	300	225	48	27.20	20	445	1/2	2.4	10.0	BLACK
2	BB48HC-1-PT-S-27	4/4	2	288	300	325	48	27.38	36	115	1/3	3.1	13.6	STAINLESS
	ВВ72НС-1-РТ-В	6.46	2	E 40	400	505	70	07.00	24	445	1/0	24	00.4	BLACK
3	BB72HC-1-PT-S	6/6	3	540	480	505	72	27.38	34	115	1/3	3.1	22.1	STAINLESS
	BB72HC-1-PT-B-27	6.46	2	F 40	400	505	70	07.00	20	445	1/0	24	00.4	BLACK
3	BB72HC-1-PT-S-27	6/6	3	540	480	505	72	27.38	36	115	1/3	3.1	22.1	STAINLESS

Depth measurement includes handles.



GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS/ SHELVES	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK Bottles	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
2	BB48HC-1-G-PT-B	4/4	2	288	300	325	48	27.20	24	445	1/0	2.4	12.0	BLACK
	BB48HC-1-G-PT-S	4/4	2	288	300	325	48	27.38	34	115	1/3	3.1	13.6	STAINLESS
2	BB48HC-1-G-PT-B-27	4/4	2	288	300	325	48	27.38	36	115	1/2	3.1	13.6	BLACK
	BB48HC-1-G-PT-S-27	4/4	2	200	300	323	40	27.30	30	115	1/3	3.1	13.0	STAINLESS
•	BB72HC-1-G-PT-B	6.46	2	F.40	400	505	70	07.00	24	445	1/0	24	004	BLACK
3	BB72HC-1-G-PT-S	6/6	3	540	480	505	72	27.38	34	115	1/3	3.1	22.1	STAINLESS
	BB72HC-1-G-PT-B-27	C/C	_	F40	400	505	70	27.20	20	445	1/2	2.4	22.4	BLACK
3	BB72HC-1-G-PT-S-27	6/6	3	540	480	505	72	27.38	36	115	1/3	3.1	22.1	STAINLESS

Depth measurement includes handles.

GLASS DOORS (SLIDING) (Door frame only comes in black)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS/ SHELVES	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONG NECK Bottles	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
	BB48HC-1-GS-PT-B	4/4	2	200	200	225	40	25.75	24	445	1/2	2.4	10.0	BLACK
2	BB48HC-1-GS-PT-S	4/4	2	288	300	325	48	25.75	34	115	1/3	3.1	13.6	STAINLESS
2	BB48HC-1-GS-PT-B-27	4/4	2	288	300	325	40	25.75	20	115	1/3	2.1	13.6	BLACK
	BB48HC-1-GS-PT-S-27	4/4	2	200	300	323	48	25.75	36	115	1/3	3.1	13.0	STAINLESS
	BB72HC-1-GS-PT-B	0.40	2	F.40	400	505	70	05.75	24	445	1/0	24	004	BLACK
3	BB72HC-1-GS-PT-S	6/6	3	540	480	505	72	25.75	34	115	1/3	3.1	22.1	STAINLESS
	BB72HC-1-GS-PT-B-27	0.40		F.40	400	505	70	05.75	20	445	1/0	24	004	BLACK
3	BB72HC-1-GS-PT-S-27	6/6	3	540	480	505	72	25.75	36	115	1/3	3.1	22.1	STAINLESS

Depth measurement includes handles.

AVAILABLE TOPS



2-INCH STAINLESS STEEL TOP indicated with black model # and "-27" example: BB48HC-1-G-PT-B-27



GALVANIZED SUB-TOP indicated with black model # example: BB48HC-1-G-PT-B







BACK BAR COOLERS

Food Rated

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS/ SHELVES	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK Bottles	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
_	BB24HC-1-F-B	1/2	1	100	140	110	0.4	20.42	2775	445	1/6		7.00	BLACK
1	BB24HC-1-F-S	1/2	I	180	140	110	24	30.13	37.75	115	1/6	2	7.66	STAINLESS FRONT
1	BB36HC-1-F-B	1/2	1	240	220	170	36	24.5	34	115	1/4	2.5	8.31	BLACK
	BB36HC-1-F-S	1/2	I	240	220	170	30	24.5	34	115	1/4	2.5	0.31	STAINLESS
1	BB36HC-1-F-B-27	1/2	1	240	220	170	36	24.5	36	115	1/4	2.5	8.31	BLACK
•	BB36HC-1-F-S-27	1/2	ı	240	220	170	30	24.5	30	115	1/4	2.5	0.31	STAINLESS
2	BB48HC-1-F-B	2/4	2	288	300	325	48	24.5	34	115	1/4	2.5	12.4	BLACK
	BB48HC-1-F-S	2/4	2	200	300	323	40	24.5	34	115	1/4	2.5	12.4	STAINLESS
2	BB48HC-1-F-B-27	2/4	2	288	300	325	48	24.5	36	115	1/4	2.5	12.4	BLACK
	BB48HC-1-F-S-27	2/4	2	200	300	323	40	24.5	30	115	1/4	2.5	12.4	STAINLESS
2	BB58HC-1-F-B	2/4	2	528	440	365	F0	29.13	27.25	115	1/4	2.5	21.86	BLACK
2	BB58HC-1-F-S	2/4	2	520	440	303	59	29.13	37.25	115	1/4	2.5	21.00	STAINLESS FRONT
2	BB68HC-1-F-B	2/4	3	672	550	435	69	29.13	37.25	115	1/3	5.3	25.93	BLACK
	BB68HC-1-F-S	2/4	3	672	550	433	09	25.13	37.23	115	1/3	5.5	25.55	STAINLESS FRONT
3	BB72HC-1-F-B	3/6	3	540	480	505	72	24.5	34	115	1/3	3.1	19.92	BLACK
3	BB72HC-1-F-S	3/0	3	540	400	505	12	24.5	34	115	1/3	3.1	19.92	STAINLESS
3	BB72HC-1-F-B-27	3/6	3	540	480	505	72	24.5	36	115	1/3	3.1	19.92	BLACK
3	BB72HC-1-F-S-27	3/0	3	540	400	505	12	24.5	30	115	1/3	3.1	19.92	STAINLESS
3	BB78HC-1-F-B	3/6	4	740	630	560	79	29.13	37.25	115	1/3	5.5	33.59	BLACK
3	BB78HC-1-F-S	3/0	4	740	630	300	/5	23.13	37.23	115	1/3	5.5	33.33	STAINLESS FRONT
	ВВ94НС-1-F-В	2/6	_	020	705	675	OF	20.42	27.25	445	1/2		27.02	BLACK
3	BB94HC-1-F-S	3/6	5	920	785	675	95	29.13	37.25	115	1/3	5.5	37.82	STAINLESS FRONT

Depth measurement includes handles. BB24 height measurement includes mounting height.

AVAILABLE TOPS



1.5-INCH STAINLESS STEEL TOP indicated with green model # example: BB58HC-1-F-B



2-INCH STAINLESS STEEL TOP indicated with black model # and "-27" example: BB48HC-1-F-B-27



GALVANIZED SUB-TOP indicated with black model # example: BB48HC-1-F-B

GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS/ SHELVES	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK Bottles	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
1	BB24HC-1-FG-B BB24HC-1-FG-S	1/2	1	180	140	110	24	30.13	37.75	115	1/6	2	7.66	BLACK STAINLESS FRONT
1	BB36HC-1-FG-B BB36HC-1-FG-S	1/2	1	240	220	170	36	24.5	34	115	1/4	2.5	8.36	BLACK STAINLESS
1	BB36HC-1-FG-B-27 BB36HC-1-FG-S-27	1/2	1	240	220	170	36	24.5	36	115	1/4	2.5	8.36	BLACK STAINLESS
2	BB48HC-1-FG-B BB48HC-1-FG-S	2/4	2	288	300	325	48	24.5	34	115	1/4	2.5	12.4	BLACK STAINLESS
2	BB48HC-1-FG-B-27 BB48HC-1-FG-S-27	2/4	2	288	300	325	48	24.5	36	115	1/4	2.5	12.4	BLACK STAINLESS
2	BB58HC-1-FG-B BB58HC-1-FG-S	2/4	2	528	440	365	59	29.13	37.25	115	1/4	2.5	21.86	BLACK STAINLESS FRONT
2	BB68HC-1-FG-B BB68HC-1-FG-S	2/4	3	672	550	435	69	29.13	37.25	115	1/3	5.3	25.93	BLACK STAINLESS FRONT
3	BB72HC-1-FG-B BB72HC-1-FG-S	3/6	3	540	480	505	72	24.5	34	115	1/3	3.1	19.92	BLACK STAINLESS
3	BB72HC-1-FG-B-27 BB72HC-1-FG-S-27	3/6	3	540	480	505	72	24.5	36	115	1/3	3.1	19.92	BLACK STAINLESS
3	BB78HC-1-FG-B BB78HC-1-FG-S	3/6	4	740	630	560	79	29.13	37.25	115	1/3	5.5	33.59	BLACK STAINLESS FRONT
3	BB94HC-1-FG-B BB94HC-1-FG-S	3/6	5	920	785	675	95	29.13	37.25	115	1/3	5.5	37.82	BLACK STAINLESS FRONT

Depth measurement includes handles. BB24 height measurement includes mounting height.

GLASS DOORS (SLIDING) (Door frame only comes in black)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS/ SHELVES	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONG NECK Bottles	WIDTH	DEPTH	HEIGHT	VOLTS	HP	AMPS	CUBIC FEET	COLOR		
	BB48HC-1-F-GS-B	0./4		200	200	205	40	00.00	24	445	4/4	0.5	40.4	BLACK		
2	BB48HC-1-F-GS-S	2/4	2	288	300	325	48	23.63	34	115	1/4	2.5	12.4	STAINLESS		
	BB48HC-1-F-GS-B-27	0/4	_	200	200	205	40	00.00	20	445	4/4	0.5	40.4	BLACK		
2	BB48HC-1-F-GS-S-27	2/4	2	288	300	325	48	23.63	36	115	1/4	2.5	12.4	STAINLESS		
	BB58HC-1-F-GS-B	2/4	2	F20	440	205	F0	20.25	37.25	115	1/4	2.5	24.00	BLACK		
2	BB58HC-1-F-GS-S	2/4	2	528	440	365	59	28.25	37.25	115	1/4	2.5	21.86	STAINLESS FRONT		
	BB72HC-1-F-GS-B	2/6	_	F 40	400	505	70	00.00	24	445	1/0	2.4	10.00	BLACK		
3	BB72HC-1-F-GS-S	3/6	3	540	480	505	72	23.63	34	115	1/3	3.1	19.92	STAINLESS		
	BB72HC-1-F-GS-B-27	2/6	_	F 40	400	505	70	00.00	20	445	1/0	24	40.00	BLACK		
3	BB72HC-1-F-GS-S-27	3/6	3/6	3/6	3	540	480	505	72	23.63	36	115	1/3	3.1	19.92	STAINLESS

Depth measurement includes handles.







BACK BAR COOLERS

Food Rated Pass-thru

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS/ SHELVES	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK Bottles	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
2	ВВ48НС-1-F-РТ-В	4/4	2	288	300	325	48	27.38	34	115	1/3	3.1	13.6	BLACK
2	BB48HC-1-F-PT-S	4/4	2	200	300	323	40	27.30	34	115	1/3	3.1	13.0	STAINLESS
2	BB48HC-1-F-PT-B-27	4/4	2	288	300	325	48	27.38	36	115	1/2	3.1	13.6	BLACK
2	BB48HC-1-F-PT-S-27	4/4	2	200	300	323	40	27.30	30	115	1/3	3.1	13.0	STAINLESS
3	ВВ72НС-1-F-РТ-В	C/C	3	540	480	505	72	27.38	24	445	1/2	3.1	22.1	BLACK
3	BB72HC-1-F-PT-S	6/6	3	540	480	505	12	27.38	34	115	1/3	3.1	22.1	STAINLESS
3	BB72HC-1-F-PT-B-27	6/6	3	540	480	505	72	27.38	36	115	1/3	3.1	22.1	BLACK
3	BB72HC-1-F-PT-S-27	0/0	3	540	400	505	12	27.30	30	115	1/3	ა.1	22.1	STAINLESS

Depth measurement includes handles.



GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS/ SHELVES	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK Bottles	WIDTH	DEPTH	HEIGHT	VOLTS	HP	AMPS	CUBIC FEET	COLOR
	BB48HC-1-FG-PT-B	4/4	2	200	200	225	40	27.20	24	445	1/0	2.4	12.0	BLACK
2	BB48HC-1-FG-PT-S	4/4	2	288	300	325	48	27.38	34	115	1/3	3.1	13.6	STAINLESS
2	BB48HC-1-FG-PT-B-27	4/4	2	288	300	325	48	27.20	36	115	1/2	3.1	12.6	BLACK
2	BB48HC-1-FG-PT-S-27	4/4	2	200	300	323	40	27.38	30	115	1/3	3.1	13.6	STAINLESS
3	BB72HC-1-FG-PT-B	C/C	3	F40	400	гог	72	27.38	24	445	1/2	2.4	224	BLACK
3	BB72HC-1-FG-PT-S	6/6	3	540	480	505	12	27.38	34	115	1/3	3.1	22.1	STAINLESS
3	BB72HC-1-FG-PT-B-27	6/6	3	540	400	505	72	27.38	36	115	1/3	3.1	22.1	BLACK
3	BB72HC-1-FG-PT-S-27	6/6	3	540	480	505	12	27.38	30	115	1/3	3.1	22. I	STAINLESS

Depth measurement includes handles.

GLASS DOORS (SLIDING) (Door frame only comes in black)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

SECTIONS	MODEL#	DOORS/ SHELVES	# OF STRAIGHT WALL KEGS	12oz CANS	12oz BOTTLES	LONGNECK Bottles	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR	
	BB48HC-1-GS-F-PT-B	4/4		200	200	225	40	0F 7F	0.4	445	1/0	0.4	40.0	BLACK	
2	BB48HC-1-GS-F-PT-S	4/4	2	288	300	325	48	25.75	34	115	1/3	3.1	13.6	STAINLESS	
2	BB48HC-1-GS-F-PT-B-27	4/4	2	288	200	225	40	25.75	20	445	1/0	2.4	40 C	BLACK	
2	BB48HC-1-GS-F-PT-S-27	4/4	2	288	300	325	48	25.75	36	115	1/3	3.1	13.6	STAINLESS	
3	BB72HC-1-GS-F-PT-B	C/C	3	F40	400	505	72	25.75	34	445	1/0	3.1	22.1	BLACK	
3	BB72HC-1-GS-F-PT-S	6/6	3	540	480	505	12	25./5	34	115	1/3	3.1	22.1	STAINLESS	
3	BB72HC-1-GS-F-PT-B-27	C/C	2	F40	400	F0F	70	25.75	20	445	1/2	2.1	22.4	BLACK	
3	BB72HC-1-GS-F-PT-S-27	6/6	3	540	480	505	505 7	72	2 25.75	5 36	115	1/3	3.1	22.1	STAINLESS

Depth measurement includes handles.

AVAILABLE TOPS



2-INCH STAINLESS STEEL TOP indicated with black model # and "-27" example: BB48HC-1-FG-PT-B-27



GALVANIZED SUB-TOP indicated with black model # example: BB48HC-1-FG-PT-B







BOTTLE COOLERS



Heavy-duty sliding lids

3 year parts and labor warranty with an additional 4 year compressor part warranty

Made in USA

Galvanized steel interior and floor

Full electronic temperature control

100% Metal lids

reinforced to prevent bowing

Stainless steel top

Bottle opener and cap catcher standard

Adjustable wire dividers



ADJUSTABLE DIVIDERS
to organize cooler to meet your specific needs



100% METAL LIDS reinforced to prevent bowing

FROSTY BREW™ 30-32°

MAINTAINS PRODUCT TEMPERATURES OF 30-32°F.

MODEL#	LIDS/ DIVIDERS	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR		
DW49HC-B-29	0.00		20.5	00.75	445	4/4		40.7	BLACK		
DW49HC-S-29	2/3	50	26.5	33.75	115	1/4	2.5	13.7	STAINLESS FRONT		
DW64HC-B-29	0/4	05	00 F	20.75	445	4/4		40.5	BLACK		
DW64HC-S-29	2/4	65	26.5	33.75	115	1/4	2.5	18.5	STAINLESS FRONT		
DW79HC-B-29	0.45								BLACK		
DW79HC-S-29	3/5	80	26.5	33.75	115	1/4	2.5	24.1	STAINLESS FRONT		
DW94HC-B-29									BLACK		
DW94HC-S-29	4/6	4/6	4/6	95	26.5	33.75	115	1/4	2.5	28.63	STAINLESS FRONT

Depth measurement includes handles. Height measurement includes mounting height.

STANDARD 36-40°

MAINTAINS PRODUCT TEMPERATURES OF 36-40°F.

MODEL#	LIDS/ DIVIDERS	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR															
SF34HC-B	1/0	04.00	20.5	00.00		1 (10			BLACK															
SF34HC-S	1/2	34.88	26.5	33.63	115	1/10	1.2	7.5	STAINLESS FRONT															
DW49HC-B	0./0	50	00 F	22.75	445	4/4	2.5	40.7	BLACK															
DW49HC-S	2/3	50	26.5	33.75	115	1/4	2.5	13.7	STAINLESS FRONT															
DW64HC-B	0/4	05	20.5	20.75	445	4/4	0.5	40.5	BLACK															
DW64HC-S	2/4	65	26.5	33.75	115	1/4	2.5	18.5	STAINLESS FRONT															
DW79HC-B	0/5	20	20.5	20.75	445	4/4	0.5	044	BLACK															
DW79HC-S	3/5	80	26.5	33.75	115	1/4	2.5	24.1	STAINLESS FRONT															
DW94HC-B	4/0	0.5	20.5	20.75	445	4/4	0.5	20.00	BLACK															
DW94HC-S	4/6	4/6	4/6	4/6	4/6	4/6	4/6	4/6	4/6	4/6	4/6	4/6	4/6	4/6	4/6	95	26.5	33.75	115	1/4 2.5	2.5	28.63	STAINLESS FRONT	

Depth measurement includes handles. Height measurement includes mounting height.

ACCESS OPTIONS

Metal lids

EXTERIOR FINISHES

- Black
- Stainless Steel

INTERIOR FINISHES

- · Galvanized steel
- Stainless steel

AVAILABLE OPTIONS

Remote models available

AVAILABLE ACCESSORIES

- Frosty brew model (30-32° F)
- Extra wide dividers
- Locks

MOUNTING OPTIONS

- 3" casters
- 6" legs

AGENCY CERTIFICATIONS









GLASS & PLATE CHILLERS



Heavy-duty sliding lids

3 year parts and labor warranty with an additional 4 year compressor part warranty

Made in USA

Front or top loading

Interior thermometer

Self-closing door with 120° stay-open feature

(Front Loading Models)

Field-reversible door

(Front Loading Models)

Easy door removal

for service and cleaning (Top Loading)

Magnetic gasket attached to each door

for positive seal

Auto-defrost

Built-in Condensate Evaporator System

Operating Temperature -10F

Two Epoxy Coated Shelves

R290 Refrigerant



ADJUSTABLE DIVIDERS

to organize cooler to meet your specific needs



100% METAL LIDS

reinforced to prevent bowing (GF models)

FRONT LOADING

CHILLS TO 0°F, PRODUCING FROST WHEN REMOVED

MODEL#	DOORS/ SHELVES		APACITY 8" PLATES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	COLOR
FLG24HC-1-B	1/0	00	100	24	20.42	22	445	1/4	2.5	E 00	BLACK
FLG24HC-1-S	1/2	80	100	24	30.13	32	115	1/4	2.5	5.06	STAINLESS

Front breathing

needs no installation clearances on the side, back or bottom

Depth measurement includes handles.



TOP LOADING

CHILLS TO 0°F, PRODUCING FROST WHEN REMOVED

MODEL#	LIDS/ DIVIDERS		APACITY 8" PLATES	WIDTH	DEPTH	HEIGHT	VOLTS	HP	AMPS	CUBIC FEET	COLOR
GF24HC-B	1/2	76	100	24	26.13	33.63	115	1/2	3.5	4	BLACK
GF24HC-S	1/2	70	100	24	20.13	33.03	115	1/2	3.5	4	STAINLESS
GF34HC-B	1/0	94	150	24	26.13	33.63	115	1/2	2.5	6.4	BLACK
GF34HC-S	1/2	94	150	34	20.13	33.03	115	1/2	3.5	0.4	STAINLESS
GF48HC-B	2/4	104	250	40	20.42	22.62	445	1/2	2.5	0.05	BLACK
GF48HC-S	2/4	164	250	48	26.13	33.63	115	1/2	3.5	9.65	STAINLESS

Depth measurement includes handles.

ACCESS OPTIONS

- Doors
- · Metal lids

EXTERIOR FINISHES

- Black
- Stainless Steel

INTERIOR FINISHES

- · Galvanized steel with reinforced stainless steel floor
- · Stainless steel

AVAILABLE OPTIONS

· Remote models available

AVAILABLE ACCESSORIES

· Locks factory installed available for GF24L & GF34L

MOUNTING OPTIONS

• 6" legs (GF models only)

AGENCY CERTIFICATIONS









Bar & Wine Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
SHELVING/ORGANIZERS		
Epoxy Coated Wire Shelf	DD48	403-322D
Epoxy Coated Wire Shelf	DD50/50C Shelf Kit (set of 2)	00C21-022A
Epoxy Coated Wire Shelf	DD58 Shelf Kit (set of 2)	00C21-007A
Epoxy Coated Wire Shelf	DD68 Shelf Kit (set of 2)	00C21-006A
Epoxy Coated Wire Shelf	DD72	403-326D
Epoxy Coated Wire Shelf	DD78 Shelf Kit (set of 3)	00C21-023A
Epoxy Coated Wire Shelf	DD94 Left/Right Shelf	403-216D
Epoxy Coated Wire Shelf	DD94 Center Shelf	403-249D
Epoxy Coated Wire Shelf	BB24	403-943D-02
Epoxy Coated Wire Shelf	BB36	403-924D-02
Epoxy Coated Wire Shelf	BB48/48G	403-322D
Epoxy Coated Wire Shelf	BB58/58G	403-582D
Epoxy Coated Wire Shelf	BB68/68G	403-216D (RH) 403-249D (LH)
Epoxy Coated Wire Shelf	BB72/72G	403-326D
Epoxy Coated Wire Shelf	BB78/78G CTR	403-582D
Epoxy Coated Wire Shelf	BB78/78G RH	403-584D
Epoxy Coated Wire Shelf	BB94/94G CTR	403-216D
Epoxy Coated Wire Shelf	BB94/94G RH	403-249D
Epoxy Coated Wire Shelf	DP46/67/93/119, DPD46/67/93/119	403-834D
Shelf Clip	DD48/72/94	403-168A
Shelf Clip	All BB's	403-168A

DESCRIPTION	UNIT(S)	PART NUMBER
MOUNTING		
6" Caster	BB24/BB36	00C31-038A
6" Caster	BB48,BB72 (set of four)	00C31-038A
3" Caster	BB48,BB72 (set of four)	00C31-041A
3" Caster	BB58,BB68 (set of four)	00C26-012A
3" Caster	BB78,BB94 (set of six)	00C26-017A
3" Caster	DD36	00C31-041A
6" Caster	DD36	00C31-038A
6" Caster	DD48,DD72 (set of four)	00C31-038A
3" Caster	DD48,DD72 (set of four)	00C31-041A
3" Caster	DD50,DD58,DD68 (set of four)	00C26-012A
3" Caster	DD78,DD94 (set of six)	00C26-017A
3" Caster	DW49 (set of four)	00C31-034ABB
3" Caster	DW64 (set of four)	00C31-031ABB
3" Caster	DW79, DW94 (set of six)	00C31-030ABB
6" Adjustable with Plate	DW49 (set of four)	00C31-036A
6" Adjustable with Plate	DW64 (set of four)	00C31-033ABB
6" Adjustable with Plate	DW79, 94 (set of six)	00C31-032ABB
6" Adjustable with Plate	SF34 (set of four)	00C31-035AAA
Leg Accessory Kit	BM23 (set of four)	00C06-002A
6" Adjustable with Plate	GF24,34,48 (set of four)	00C31-035AAA
6" Black Leg	BB/DD 24, 36, 48, 72 (set of four)	58B02-001A
6" Adjustable with Plate	BB58,68, DD50,58,68 (set of four)	00C26S014A
6" Adjustable with Plate	BB/DD 78,94 (set of six)	00C26S015A

LID LOCKS		
Lid Lock	GF24/34	00C30-100A
Lid Lock	GF48	00C30-101A
Lid Lock	SF34	00C30-031ABB
Lid Lock	DW49 Solid Lid	00C30-030AAA
Lid Lock	DW64 Solid Lid	00C30-029AAA
Lid Lock	DW79 Solid Lid	00C30-028AAA
Lid Lock (2 required for DW94)	DW94 Solid Lid	00C30-030AAA





Bar & Wine Accessories

DESCRIPTION	UNIT(S)	PART NUMBER
TAPS/FAUCETS/MANIFOLDS		
Hole cover for cut out on DD units	ALL DD UNITS	00C10-006A
1 Tap 3" OD Beer Faucet	ALL DD UNITS	406-053A
1 Tap 2 1/2" OD Beer/Wine Faucet	ALL DD UNITS	406-004A
2 Tap 3" OD Beer/Wine Faucet	ALL DD UNITS	406-054A
3 Tap 3" OD Beer/Wine Faucet	ALL DD UNITS	406-055A
4 Tap 3" OD Beer/Wine Faucet	ALL DD UNITS	406-064A
5 Tap 3" OD Beer/Wine Faucet	ALL DD UNITS	406-075A
Single Faucet Adapter	ALL DD UNITS	406-056A
Double Faucet Adapter	ALL DD UNITS	406-057A
2 Way Manifold	ALL DD UNITS	402-188A
3 Way Manifold	ALL DD UNITS	402-189A
4 Way Manifold	ALL DD UNITS	402-191A

ADDITIONAL ACCESSORIES		
Wire Divider (Step)	DW UNITS	403-114D
Wire Divider (Adjustable)	DW UNITS	403-113D
Wire Divider Spring	DW UNITS	401-090AAB
Cap Catcher (black)	DW & SF UNITS	09B30S025C
Draft Arm Faucet Lock (slide on)	ALL DD UNITS	401-909A
Glass Rinser	ALL DD UNITS	406-067A





Super Bright RGB LED Liquor Shelves

- 50,000 hours minimum life
- · Environmentally friendly: no mercury, lead or toxic gases
- · Color-rich, programmable LED's
- · Available up to 8' Long
- · 44 Key RGB Wireless Remote Control to control unlimited colors with multiple lighting effects
- Independent level control: choose colors for each step independent of the others
- · Plugs into any standard wall outlet
- · Modular Construction
- · Includes UL listed power supply
- 100% Black Acrylic bottle tiers. Glossy black on front and sides with frosted acrylic tops.

DESCRIPTION	PART NUMBER
2' LED Liquor Shelf, 24"L X 4.5"W X .75" Thick, 2 wall brackets	LS2-24L
3' LED Liquor Shelf, 36"L X 4.5"W X .75"Thick, 2 wall brackets	LS3-36L
4' LED Liquor Shelf, 48"L X 4.5"W X .75" Thick, 3 wall brackets	LS4-48L
5' LED Liquor Shelf, 60"L X 4.5"W X .75" Thick, 4 wall brackets	LS5-60L
6' LED Liquor Shelf, 72"L X 4.5"W X .75" Thick, 5 wall brackets	LS6-72L
2' Double Wide LED Liquor Shelf, 24"L X 9"W X .75 Thick, 2 wall brackets	LS2-24L-DW
3' Double Wide LED Liquor Shelf, 36"L X 9"W X .75 Thick, 2 wall brackets	LS3-36L-DW
4' Double Wide LED Liquor Shelf, 48"L X 9"W X .75 Thick, 3 wall brackets	LS4-48L-DW
5' Double Wide LED Liquor Shelf, 60"L X 9"W X .75 Thick, 4 wall brackets	LS5-60L-DW
6' Double Wide LED Liquor Shelf, 72"L X 9"W X .75 Thick, 5 wall brackets	LS6-72L-DW
2' Two Tier LED Bottle Display, 24"L X 9"D X 8"H	LBD2-24L
3' Two Tier LED Bottle Display, 36"L X 9"W X 8"H	LBD2-36L
4' Two Tier LED Bottle Display, 48"L X 9"W X 8"H	LBD2-48L
5' Two Tier LED Bottle Display, 60"L X 9"W X 8"H	LBD2-60L
6' Two Tier LED Bottle Display, 72"L X 9"W X 8"H	LBD2-72L
2' Three Tier LED Bottle Display, 24"L X 13.5"D X 12"H	LBD3-24L
3' Three Tier LED Bottle Display, 36"L X 13.5"D X 12"H	LBD3-36L
4' Three Tier LED Bottle Display, 48"L X 13.5"D X 12"H	LBD3-48L
5' Three Tier LED Bottle Display, 60"L X 13.5"D X 12"H	LBD3-60L
6' Three Tier LED Bottle Display, 72"L X 13.5"D X 12"H	LBD3-72L
2' Four Tier LED Bottle Display, 24"L X 18"W X 16"H	LBD4-24L
3" Four Tier LED Bottle Display, 36"L X 18"W X 16"H	LBD4-36L
4' Four Tier LED Bottle Display, 48"L X 18"W X 16"H	LBD4-48L
5' Four Tier LED Bottle Display, 60"L X 18"W X 16"H	LBD4-60L
6' Four Tier LED Bottle Display, 72"L X 18"W X 16"H	LBD4-72L









MILK COOLERS

MADE TO DELIVER CONSISTENT PERFORMANCE DURING REPEATED ACCESS





Forced Air







MILK COOLERS



One-piece bottom for maximum support

3 year parts and labor warranty with an additional 4 year compressor part warranty

Made in USA

CFC & HCFC-free insulation is foamed-in-place

for increased structural strength & energy efficiency

Epoxy coated, steel wire racks included

for added floor protection

Flexible compression door gaskets

ensure a tight seal for added temperature control

Cylinder Locks

Bottom drain for connection to drain hose and easy cleaning

External digital thermometer

Coolers hold milk between 36°-38°F

until ready to serve for maximum refreshment





ONE-PIECE REINFORCED FLOOR

for maximum milk crate support and made with stainless steel



SINGLE AND DUAL ACCESS

models available

COLD WALL - SINGLE ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

MODEL#	CASE CA 13 X 13 X 11"	19 X 13 X 11"	WIDTH	DEPTH	HEIGHT	VOLTS	HP	AMPS	CUBIC FEET	EXTERIOR FINISH	INTERIOR FINISH
SM34HC-S										STAINLESS	STAINLESS
SM34HC-W	8	4	34	30.63	41.13	115	1/3	2.2	12.73	WHITE	GALVANIZED
SM34HC-W-02										WHITE	STAINLESS
SM49HC-S										STAINLESS	STAINLESS
SM49HC-W	12	8	49	30.63	41.13	115	1/3	2.2	20.32	WHITE	GALVANIZED
SM49HC-W-02										WHITE	STAINLESS
SM58HC-S										STAINLESS	STAINLESS
SM58HC-W	16	10	58	30.63	41.13	115	1/3	2.2	22.63	WHITE	GALVANIZED
SM58HC-W-02										WHITE	STAINLESS

Depth measurement includes handles. Height measurement includes mounting height.

FORCED AIR - SINGLE ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

MODEL#	CASE CA 13 X 13 X 11"	APACITY 19 X 13 X 11"	WIDTH	DEPTH	HEIGHT	VOLTS	HP	AMPS	CUBIC FEET	EXTERIOR FINISH	INTERIOR FINISH
SMF34HC-1-S										STAINLESS	STAINLESS
SMF34HC-1-W	8	4	34	33.63	46.88	115	1/4	1.87	13.59	WHITE	GALVANIZED
SMF34HC-1-W-02										WHITE	STAINLESS
SMF49HC-1-S								1/4 2.46		STAINLESS	STAINLESS
SMF49HC-1-W	12	8	49	33.63	46.88	115	1/4		19.66	WHITE	GALVANIZED
SMF49HC-1-W-02										WHITE	STAINLESS
SMF58HC-1-S							1/4			STAINLESS	STAINLESS
SMF58HC-1-W	16	10	58	33.63	46.88	115		2.46	24	WHITE	GALVANIZED
SMF58HC-1-W-02										WHITE	STAINLESS

Depth measurement includes handles. Height measurement includes mounting height.

ACCESS OPTIONS

Metal lids

EXTERIOR FINISHES

- · White coated steel
- · Stainless steel

INTERIOR FINISHES

- Galvanized steel
- Stainless steel

AVAILABLE ACCESSORIES

- Cow Spot graphics
- · Custom graphics available
- Corner & Wrap-around bumpers

MOUNTING OPTIONS

- 4" casters (SM models only)
- 6" casters (SMF models only)

AGENCY CERTIFICATIONS













MILK COOLERS

COLD WALL - DUAL ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

MODEL#	CASE CA 13 X 13 X 11"	APACITY 19 X 13 X 11"	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	EXTERIOR FINISH	INTERIOR FINISH
ST34HC-S					41.13					STAINLESS	STAINLESS
ST34HC-W	8	4	34	31.25		115	1/2	3.7	12.37	WHITE	GALVANIZED
ST34HC-W-02										WHITE	STAINLESS
ST49HC-S				31.25	41.13	115	1/2		18.97	STAINLESS	STAINLESS
ST49HC-W	12	8	49					3.7		WHITE	GALVANIZED
ST49HC-W-02										WHITE	STAINLESS
ST58HC-S										STAINLESS	STAINLESS
ST58HC-W	16	10	58	31.25	41.13	115	1/2	3.7	22.5	WHITE	GALVANIZED
ST58HC-W-02										WHITE	STAINLESS

Depth measurement includes handles. Height measurement includes mounting height.

FORCED AIR - DUAL ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

MODEL#	CASE CAPACITY 13 X 13 X 11" 19 X 13 X 11"		WIDTH	DEPTH	HEIGHT	VOLTS	HP	AMPS	CUBIC FEET	EXTERIOR FINISH	INTERIOR FINISH
STF49HC-1-S				34	47.75	115	1/4	2.46		STAINLESS	STAINLESS
STF49HC-1-W	12	8	49						20.55	WHITE	GALVANIZED
STF49HC-1-W-02										WHITE	STAINLESS
STF58HC-1-S				34	47.75	115	1/4			STAINLESS	STAINLESS
STF58HC-1-W	16	10	58					2.46	24.3	WHITE	GALVANIZED
STF58HC-1-W-02										WHITE	STAINLESS

 ${\it Depth\ measurement\ includes\ handles.\ Height\ measurement\ includes\ mounting\ height.}$

DESCRIPTION	UNIT(S)	PART NUMBER
MOUNTING		
4" Plate Caster (standard)	SM/ST 34,49,58 (per caster-2 required per cabinet)	401-094A
4" Plate Caster w/brake (standard)	SM/ST 34,49,58 (per caster-2 required per cabinet)	401-099A
7" Plate Caster (standard)	SMF34,SMF49,SMF58 (per caster-2 requred per cabinet)	401-519A
7" Plate Caster w/brake (standard)	SMF34,SMF49,SMF58 (per caster-2 requred per cabinet)	401-520A
5" Plate Caster w/brake (standard)	STF49/STF58 (per caster-2 required per cabinet)	401-127A
5" Plate Caster (standard)	STF49/STF58 (per caster-2 required per cabinet)	401-209A
6" Adjustable with Plate	SM34,49,58 ST34,49,58 (set of four)	00C06-003A

BUMPERS (Require field tapping and in	nstallation)	
Wrap Around Bumpers	SM34/ST34	00C01-004A
Wrap Around Bumpers	SM49 / ST49	00C01-005A
Wrap Around Bumpers	SM58 / ST58	00C01-006A
Wrap Around Bumpers	SMF34/STF34	00C01-009A
Wrap Around Bumpers	SMF49 / STF49	00C01-010A
Wrap Around Bumpers	SMF58 / STF58	00C01-011A
Corner Bumpers (single)	All Milk Coolers	703-868A
Corner Bumpers (Set of 4)	Corner Bumper Kit (set of 4)	00C01-012A-01

DECALS		
Base Kit (Cow Spots)	SM34, ST34, SMF34	807-836C
1 Base Kit (Cow Spots)	SM49, ST49, SMF49	807-836C
Supplemental Kit (Cow Spots)	SM49, ST49, SMF49	807-837C
1 Base Kit (Cow Spots)	SM58, ST58, SMF58	807-836C
Supplemental Kit (Cow Spots)	SM58, ST58, SMF58 (2 kits required)	807-837C
Got Milk Lid Decal	SMF/SM/ST34	807-839C-001
Got Milk Lid Decal	SMF/SM/ST49	807-839C-002
Got Milk Lid Decal	SMF/SM/ST58	807-839C-003
Got Milk Lid Decal	STF49	807-839C-004
Got Milk Lid Decal	STF58	807-839C-005
Got Milk Door Decal	SMF/SM/ST34	807-839C-006
Got Milk Door Decal	SMF/SM/ST49	807-839C-007
Got Milk Door Decal	SMF/SM/ST58	807-839C-008







BLAST CHILLERS / SHOCK FREEZERS

RAPID CHILLING FOR OPTIMAL FOOD SAFETY AND KITCHEN EFFICIENCY



Self Contained



Remote





BLAST CHILLERS/SHOCK FREEZERS

Self Contained





Compact construction

Electronic control board display

Custom chill/freeze cycles

Core temperature probe

Manual defrost

Insulation is CFC and HCFC free, high density polyurethane

R404A refrigeration

Self-contained refrigeration

3 Year parts and labor / Additional 2 year compressor part warranty

Automatic product storing at end of cycle

Up to 99 custom programmable cycles

USB Port for HACCP report download



CORE PROBEmeasures product temperature



ELECTRONIC CONTROL DISPLAY intuitive programmable display

WHAT IS BLAST CHILLING AND FREEZING?

Blast Chilling extracts the heat out of food, rapidly lowering the temperature. Department of Health guidelines require that all food temperatures be reduced from 150°F to 38°F degrees within a 90 minute period to keep food out of the "danger zone" of 145°F to 46°F, where bacteria multiplies fast.

Blast freezing rapidly lowers food temperatures from 150°F to 0°F vs. chilling temperatures above.

WHAT IS SOFT CHILL?

The Soft Chill cycle is ideal for the rapid, but gentle chilling of any dish (i.e., rice, pasta, fish, and fruit). This cycle brings the temperature of the food down while maintaining positive air temperatures of 37°F or above. This prevents ice crystals from forming that can damage the structure of delicate foods and allows for delicate foods to keep their brilliant colors.

WHAT IS HARD CHILL?

The Hard Chill cycle is ideal for chilling "standard products" such as cooked meat, lasagna, and individually portioned meals.

BENEFITS OF BLAST CHILLING

- Always serve fresh, top quality products
- · Color, texture, and nutritional value are locked in
- · The fast cooling process of blast chilling dramatically reduces bacteria reproduction, minimizing food spoilage
- · Delicate foods like rice, pasta, fish, and fruit are protected
- · Kitchen Efficiency Saves Time & Money
- Allows advance food prep by preparing larger batches that can be refrigerated or frozen for later use
- · Can enhance profits by increasing product capacity and reducing food waste
- · Allows left over food from serving line to be quickly and safely chilled for later use
- · Use Blast Chiller/Freezers on raw or cooked food

BLAST CHILLER/SHOCK FREEZERS

MODEL#	PAN CAPACITY	CHILLING CYCLE	CHILLING CAPACITY	WIDTH	DEPTH	HEIGHT	VOLTS	AMPS	CUBIC FEET
CEUSTAG	3 - 12x20" 194° to 37° F (90 minutes) 17.6 lbs 194° to 0° F (240 minutes) 11 lbs 22.05 27.	276	20.47	115-120	0.0	7.3			
CF031AG		194° to 0° F (240 minutes)	11 lbs	22.05	27.6	20.47	115-120	9.9	7.3

Depth measurement includes handles. Height measurement includes mounting height.

BLAST CHILLER/SHOCK FREEZERS

Self-closing doors

with still position at 100 degrees

Ergonomic handles

6" legs standard

MODEL#	PAN CAPACITY	CHILLING CYCLE	CHILLING CAPACITY	WIDTH	DEPTH	HEIGHT	VOLTS	AMPS
BF054AP	5 - 12x20"	194° to 37° F (90 minutes)	45 lbs	33.46	29.92	33.46	208-240	66
DIOJANI	J - 12X20	194° to 0° F (240 minutes)	30 lbs	33.40	25.52	33.40	6-15P	00
BF084AP	8 - 12x20"	194° to 37° F (90 minutes)	70 lbs	33.46	33.46	52	208-240	10.1
DFU04AP	or 4 - 18x26"	194° to 0° F (240 minutes)	40 lbs	33.40	33.40	32	6-15P	10.1
BF124AP	12 - 12x20"	194° to 37° F (90 minutes)	100 lbs	33.46	33.46	70.87	208-240	9
DF IZ4AP	or 6 - 18x26"	194° to 0° F (240 minutes)	70 lbs	33.40	33.40	/0.0/	15-20P	3
BF164AP	16 - 12x20"	194° to 37° F (90 minutes)	140 lbs	33.46	33.46	76.75	208-240	13.2
DF 104AP	or 8 - 18x26"	194° to 0° F (240 minutes)	100 lbs	33.40	33.40	/0./3	15-20P	13.2
DE400AD	24 - 12x20"	194° to 37° F (90 minutes)	200 lbs		24.05	70.07	208-240	24
BF122AP	or 12 - 18x26"	194° to 0° F (240 minutes)	140 lbs	43.31	34.85	70.87	15-30P	24

Depth measurement includes handles. Height measurement includes mounting height.

FINISHES

Stainless steel interior and exterior

ACCESSORIES

· UV Lamp (must be added at time of order)

AGENCY CERTIFICATIONS







REMOTE BLAST CHILLERS/SHOCK FREEZERS



Roll-in and Roll-thru Cabinets

Snap in place magnetic gaskets self closing door with hold open stop at 100°

On board recipe book with 99 free memory positions for custom programs

3 Year parts and labor / additional 2 year compressor part warranty

Stainless steel exterior and interior

Die-formed interior floor has rounded corners

Central drain for easy cleaning (select models)

Anti-condensation perimeter heating around door opening

Ergonomic door handle and stainless steel

Soft and hard, timed or core probe blast chilling

Multi point sensor temperature display button

HACCP alarm display button

Pre-cooling cycle button

Adjustable evaporator fan speed button

Manually initiated defrost, automatic termination

USB data recorder

Infinity mode program with adjustable set point (chilling only)

Automatic conservation mode at end of cycle

Contact factory for compatibility of refrigerants

AVAILABLE DOORS

• Solid (one full-door)

CONFIGURATIONS

- Roll-in
- · Roll-thru





EXTERIOR FINISHES

· Stainless steel

INTERIOR FINISHES

· Stainless steel

AVAILABLE OPTIONS

· Left hinge doors

AVAILABLE ACCESSORIES

- UV sterilization lamp (must be added at time of order)
- · Single sensor probes (up to 4 possible)
- · Stainless steel ramp

AGENCY CERTIFICATIONS



AVAILABLE IN ROLL-IN OR ROLL-THRU

Shown with optional ramp







REMOTE BLAST CHILLERS/SHOCK FREEZERS

ROLL-IN


MODEL#	CART CAPACITY	PAN SIZE	TEMP RANGE	LBS BC LBS SF	VOLTAGE	AMPS	BTU/HR (BASED ON R404A)
BF201DP-1P 47.25" x 45.25" x 87.75"	1	20 - 18" x 26" sheet pan cart or 20 - 12" x 20" steam pan cart	194/0	175-125	208-240	2.5	22014
BF201AP-1P 47.25" x 45.25" x 87.75"	1	20 - 18" x 26" sheet pan cart or 20 - 12" x 20" steam pan cart	194/0	230-155	208-240	5.7	24891
BF202DP-1P 47.25" x 76.75" x 87.75"	1	20 - 18" x 26" sheet pan cart or 40 - 12" x 20" steam pan cart	194/0	350-250	208-240	5.2	35584
BF202AP-1P 47.25" x 76.75" x 87.75"	1	20 - 18" x 26" sheet pan cart or 40 - 12" x 20" steam pan cart	194/0	465-300	208-240	7.9	44619
BF402DP-1P 59" x 92.5" x 87.75"	2	40 - 18" x 26" sheet pan cart or 80 - 12" x 20" steam pan cart	194/0	660-440	208-240	10.4	60070
BF402AP-1P 59" x 92.5" x 87.75"	2	40 - 18" x 26" sheet pan cart or 80 - 12" x 20" steam pan cart	194/0	925-595	208-240	15.8	73455
BF602DP-1P 59" x 131.88" x 87.75"	3	60 - 18" x 26" sheet pan cart or 120 - 12" x 20" steam pan cart	194/0	1000- 660	208-240	15.6	73455
BF602AP-1P 59" x 131.88" x 87.75"	3	60 - 18" x 26" sheet pan cart or 120 - 12" x 20" steam pan cart	194/0	1350- 900	208-240	23.7	114313

Depth measurement includes handles, but does not include ramp(s)

ROLL-THRU

MODEL #	CART CAPACITY	PAN SIZE	TEMP LBS BC RANGE LBS SF		VOLTAGE AMPS		BTU/HR (BASED ON R404A)	
BF201DP-2P 47.25" x 50.75" x 87.75"	1	20 - 18" x 26" sheet pan cart or 20 - 12" x 20" steam pan cart	194/0	175-125	208-240	2.5	22014	
BF201AP-2P 47.25" x 50.75" x 87.75"	1	20 - 18" x 26" sheet pan cart or 20 - 12" x 20" steam pan cart	194/0	230-155	30-155 208-240		24891	
BF202DP-2P 47.25" x 82.25" x 87.75"	1	20 - 18" x 26" sheet pan cart or 40 - 12" x 20" steam pan cart	194/0	350-250	208-240	5.2	35584	
BF202AP-2P 47.25" x 82.25" x 87.75"	1	20 - 18" x 26" sheet pan cart or 40 - 12" x 20" steam pan cart	194/0	465-300	208-240	7.9	44619	
BF402DP-2P 59" x 98" x 87.75"	2	40 - 18" x 26" sheet pan cart or 80 - 12" x 20" steam pan cart	194/0	660-440	208-240	10.4	60070	
BF402AP-2P 59" x 98" x 87.75"	2	40 - 18" x 26" sheet pan cart or 80 - 12" x 20" steam pan cart	194/0	925-595	208-240	15.8	73455	
BF602DP-2P 59" x 137.38" x 87.75"	3	60 - 18" x 26" sheet pan cart or 120 - 12" x 20" steam pan cart	194/0	1000- 660	208-240	15.6	73455	
BF602AP-2P 59" x 137.38" x 87.75"	3	60 - 18" x 26" sheet pan cart or 120 - 12" x 20" steam pan cart	194/0	1350- 900	208-240	23.7	114313	

 $\label{lem:decomp} \textit{Depth measurement includes handles, but does not include } \textit{ramp(s)}$

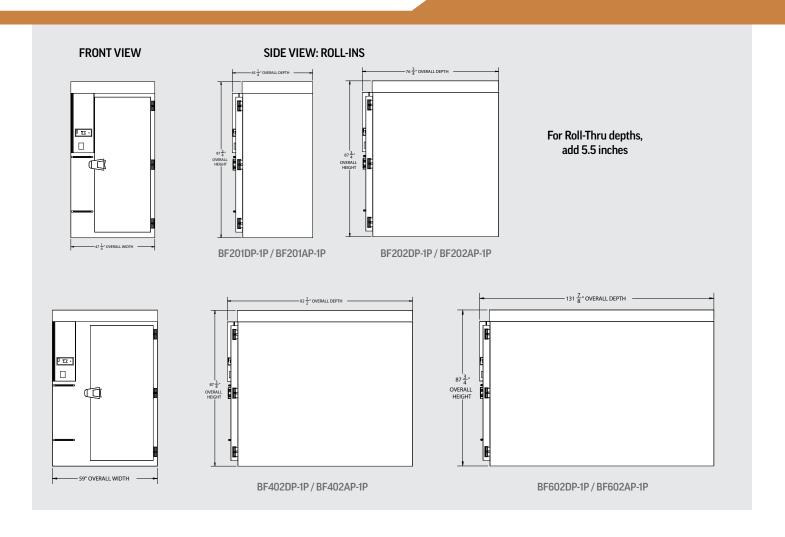

Blast Chiller Accessories

DESCRIPTION	UNIT(S)	PART NUMBER		
MOUNTING				
3.2" Casters	BF054AP	FR920596		
5" Casters	BF084AP / BF124AP / BF164AP	FR920839		
5" Casters	BF122AP	FR920735		
ADDITIONAL ACCESSORIES				
Replacement probe for BF series	placement probe for BF series All BF Models			
Secondary probe	FR966428			
RAMPS				
Stainless steel ramp (order 2 for roll-thru models) 35.3" wide by 31.9" deep	BF201DP / BF201AP	FR960075		
Stainless steel ramp (order 2 for roll-thru models) 39.2" wide by 31.9" deep	BF202DP and larger	FR960076		
Stainless steel ramp 43.2" wide by 31.9" deep	BF200RB-PF0-XL	FR960077		





BLAST CHILLER/FREEZER/THAWER

Self-Contained



5" High Definition, Easy-To-Use Touch Display Blast Chilling, Shock Freezing, Thawing Mode Self-Contained R404A Refrigeration System

Shown with optional ramp

Stainless Steel Exterior And Interior

Rounded interior corners for proper cleaning

High Density, Polyurethane Insulation

Hinged Door With Gasket

with Closing Ramp System and Ergonomic Vertical Door Handle

Anti-Condensation Resistance

Placed On The Door Under The Gasket

Stainless Steel Door Liner

Thick Stainless Steel Internal Bumper

to Avoid Damage Caused By The Cart

Die-Formed Leak-Proof Floor

Heated Core Probe

with 4 Measuring Points

Customized Blast Chilling, Blast Freezing and Thawing Cycles

320 cycles can be memorized

USB Connection

for Uploading And Downloading Data And Recipes



EXPANDABILITY AND CONTROL

easily add, edit or rename recipes, all organized by product type and function



TOUCH CONTROL PHOTO MENU

is easy to use, and the function selection is immediate and intuitive

BLAST CHILLER/FREEZERS

MODEL#	DOORS/ SHELVES	WIDTH	DEPTH	HEIGHT	VOLTS	НР	AMPS	CUBIC FEET	CHILLING CYCLE	CHILLING CAPACITY
BF200RB-PF0-XL	1/0	43.31	64.25	94.5	208	2.8	25.6	49.95	160° to 38° F (90 minutes)	187 lbs

Depth measurement includes handles. Height measurement includes mounting height.



EXTERIOR FINISHES

Stainless steel

INTERIOR FINISHES

· Stainless steel

AVAILABLE ACCESSORIES

- UV sterilization system
- Additional Single Sensor Probe
- · Stainless steel ramp

INTERIOR SPACE CAPACITY

· Maximum Interior Dimensions for Carts: 35"W x 40"D x 71"H (not included)

AGENCY CERTIFICATIONS











WARRANTY

SALES TERMS

PRICES & SPECIFICATIONS

Beverage-Air reserves the right to change the price and specifications of the equipment and/or material without notice. Prices are F.O.B. plant of manufacture.

CANCELLATION

Buyer may cancel its order, reduce quantities, revise specifications, or extend schedules only by mutual agreement as to reasonable and proper cancellation charges which shall take into account expenses already incurred and commitment made by seller, and buyer shall indemnify seller against any loss.

FREIGHT CLASS

All Beverage-Air products ship under 150 freight classification.

CUSTOMER'S FREIGHT DAMAGE PROCEDURE

Before signing the carrier's freight bill the customer should do the following:

Visible Damage

- Inspect shipment for any damage. If you see damage or feel there may be concealed damage, mark the carrier's copy of the freight bill "damaged".
- If there is damage to your shipment, action must be taken by you to notify Beverage-Air immediately. A freight claim must be filed with the carrier and an inspection scheduled by the carrier. It is the duty of the carrier to give you a written report upon notification. (VISIBLE AND CONCEALED).
- For visible damage, where possible, do not accept delivery unless the condition noted on your copy of the freight bill and signed by the driver.

Concealed Damage

If the damage is concealed, notify the carrier within 5 days of the receipt of the product by phone and in writing as well as Beverage Air. Ask them to send their agent to complete an inspection report. Retain all cartons and merchandise for inspection. It is critical that the customer take the above actions; without these steps claims for concealed damages may be denied.

3RD PARTY FREIGHT

3rd Party Freight shipments are FOB Beverage-Air and are not eligible for refusal at time of delivery.
ALL 3rd PARTY SHIPMENTS ARE THE RESPONSIBILITY OF THE SHIPPER.

Claims for damaged product are to be filed by the shipper and Beverage-Air will not be liable. This product is not eligible for return to our warehouse facility.

RETURN OF PRODUCT

EQUIPMENT - Prior Authorization must be granted by Beverage-Air before equipment can be returned for credit. Returns will only be authorized within 90 days of invoice date. Return authorizations are valid for 30 days. Equipment approved for return is subject to a 25% restocking charge.

Returned equipment must be shipped freight prepaid, packed in original carton, and received in good

PARTS - Prior Authorization must be granted by Beverage-Air before parts can be returned for credit. Returns will only be authorized within 30 days of invoice date. Return authorizations are valid for 30 days. Parts approved for return are subject to a 25% or \$25.00 restocking charge (whichever is greater). Returned parts must be shipped freight prepaid, in the original packaging, and received in good condition.

WARRANTY (Warranty valid in USA and Canada)

THREE (3) YEAR PARTS AND LABOR WARRANTY:

Beverage-Air Corporation warrants to the original purchaser of Beverage-Air branded equipment, including all parts thereof, that such equipment is free from defects in material and workmanship, under normal use, proper maintenance, and service as indicated by Beverage-Air installation and operation instructions, for a period of three (3) years from the date of installation, or thirty-nine

(39) Months from the date of shipment from the manufacturer, whichever is earlier.

ADDITIONAL FOUR (4) YEAR COMPRESSOR PART WARRANTY*:

In addition to the warranty set forth above, Beverage-Air warrants the hermetically/semi-hermetically sealed compressor (part only) for an additional FOUR (4) years beyond the first three (3) years warranty period; not to exceed eighty-seven (87) months from the date of shipment from Beverage-Air, provided upon receipt of the compressor, manufacturer examination shows the sealed compressor to be defective. This extended warranty does not cover freight for the replacement compressor or freight for the return of the failed compressor.

* Units shipped after 03/01/2020. Previous warranty applies to units shipped prior.

EXCEPTIONS:

- CT96 Models carry a one (1) year parts and labor warranty, limited to fifteen (15) months from date of shipment from Beverage-Air. These are excluded from additional compressor warranty.
- SR/SF (Slate) models carry a two (2) year parts and labor warranty, limited to twenty-seven (27) months from date of shipment from the Beverage-Air.
- Blast Chillers carry a three (3) year parts and labor warranty; additional two (2) years compressor
- TMR/TMF carry a two (2) year parts and labor warranty, limited to twenty-seven (27) months from date of shipment from the Beverage-Air.
- Units installed in Residential applications will be not covered under this warranty. Units are intended for Commercial use only.

Also, this extended compressor-part only warranty does NOT apply to any electrical controls, condenser, evaporator, fan motors, overload switch, starting relay, capacitors, temperature control, filter/drier, accumulator, refrigeration tubing, wiring harness, labor charges, or supplies which are covered by the warranty above.

Normal wear type parts, such as light bulbs/lamps and gaskets are not covered by this warranty. For the purpose of this warranty, the original purchaser shall be deemed to mean the individual or company for who the product was originally installed.

Our obligation under this warranty shall be limited to repairing or replacing, including labor, any part of such product, which proves thus defective. Beverage-Air reserves the right to examine any product claimed to be defective.

The labor warranty shall be for self-contained units only and for standard straight time, which is defined as normal service rate time, for service performed during normal working hours. Any service requested outside of a servicer's normal working hours will be covered under this warranty at the normal rate and any additional overtime rate will be at the responsibility of the equipment purchaser.

Any part or accessory determined to be defective in the product should be returned to the company within thirty (30) days under the terms of this warranty and must be accompanied by a record of the cabinet model, serial number, and identified with a return material authorization number (RMA#) issued by the manufacturer

Special installation/applications, including remote locations, are limited in coverage by this warranty. Any installation that requires extra work, and/or travel, to gain access to the unit for service is the sole responsibility of the equipment purchaser.

Improper operation resulting from factors, including but not limited to, improper or negligent cleaning and maintenance, low voltage conditions, inadequate wiring, outdoor use (unless otherwise specified) and accidental damage are no manufacturing defects and are strictly the responsibility of the purchaser.

With the exception of Blast Chillers product is designed for maintaining temperature and not bringing food to a desired temperature therefore cannot be held responsible for this function under warranty.

Units must be in a conditioned environment or warranty will be void.

Condensing coils must be cleaned at regular intervals. Failure to do so can cause compressor malfunction and will void warranty. Although cleaning requirements vary in accordance with operation of various products, Beverage-Air recommends a minimum monthly cleaning.

NO CLAIMS CAN BE MADE AGAINST THIS WARRANTY FOR SPOILAGE OF FOOD, PRODUCTS, LOSS OF SALES OR **CONSEQUENTIAL DAMAGES.**

THE FOREGOING WARRANTIES ARE EXPRESSLY GIVEN IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HERBY DISCLAIMED, ALL OTHER OBLIGATIONS OR LIABILI-TIES ON OUR PART, AND WE NEITHER ASSUME, NOR AUTHORIZE ANY OTHER PERSON TO ASSUME FOR US, ANY OBLIGATION OR LIABILITY IN CONNECTION WITH THE SALE OF SAID REFRIGERATION UNITS OR ANY PARTS THERE OF.

This warranty shall not be assignable and shall be honored only in so far as the original purchaser. This warranty does not apply outside the limits of the United States of America and Canada, nor does it apply to any part that has been subject to misuse, neglect alteration, accident, or to any damage caused by transportation, flood, fire, acts of terrorism, or acts of God.

LIMITATION OF LIABILITY:

Beverage-Air Corporation or their affiliates shall not be liable for any indirect, incidental, special or consequential damages, or losses of a commercial nature arising out of malfunction equipment or its parts components thereof, as a result of defects in material or workmanship.

THE ORIGINAL OWNER'S SOLE AND EXCLUSIVE REMEDY AND BEVERAGE-AIR'S SOLE AND EXCLUSIVE LI-ABILITY SHALL BE LIMITED TO THE REPAIR OR REPLACEMENT OF PARTS OR COMPONENTS CONTAINED IN THE EQUIPMENT IDENTIFIED ABOVE WHICH UNDER NORMAL USE AND SERVICE MALFUNCTION AS A RESULT OF DEFECTS IN MATERIAL OR WORKMANSHIP, SUBJECT TO THE APPLICABLE PROVISIONS AND LIMITATIONS STATED ABOVE.

Note: Additional Terms and Conditions of sale may apply. Notice: Specifications Subject to Change without Notice. Contact Beverage-Air for specific model agency approval. All prices are ex-works Brookville, Pennsylvania 03/01/2020







CONTACTS

CR Peterson

ph: (800) 257-4040 fax: (508) 238-3647 email: jim@crpeterson.com

territory: Maine, New Hampshire, Vermont, Connecticut, Rhode Island, Massachusetts

J Wilson Marketing

ph: (518) 692-8083 fax: (518) 692-8084

email: joe@jwilsonmarketing.com territory: New York (except Metro/ NYC)

TD Marketing

ph: (732) 339-3266 fax: (732) 902-2636

email: customerservice@tdmarketingco.com territory: New Jersey (Northern half of NJ), New York (Metro)

BSE Keystone

ph: (800) 242-9095 fax: (877) 753-5683

email: dpino@bsereps.com territory: Delaware (entire state), Pennsylvania (east of and including Bradford, Lycoming, Milton, Union, Mifflin, Juniata, Perry, Cumberland, & Adam Counties) New Jersey (south of and including Mercer, Burlington, and Ocean counties)

The Schmid-Wilson Group

ph: (410) 998-9191 email: swg@theswg.com

territory: Maryland, District of Columbia, Virginia

Phoenix Marketing

ph: (317) 986-4167 email: sammi@phoenix-reps.com territory: Indiana, Michigan

Professional Reps

ph: (877) 995-8922 fax: (602) 864-1754 email: sales@goproreps.com

territory: Ohio, Kentucky, Western quarter of Pennsylvania, West Virginia

Swanson-Girard

ph: (704) 521-8811 fax: (704) 521-8801

email: sgirard@swanson-girard.com territory: North Carolina, South Carolina

Charles Pace & Associates, Inc.

ph: (770) 969-0488 fax: (770) 969-7277 email: pace@pacereps.com territory: Georgia, Alabama, Tennessee (Central and Eastern). Florida (panhandle)

Tepper & Associates, Inc.

ph: (727) 322-1212 fax: (727) 322-1313 email: info@tepperreps.com territory: Florida (except the panhandle)

Marketing Agents South

ph: (601) 956-4661 fax: (601) 956-4726 email: sales@masouth.com territory: Mississippi, Western Tennessee, Arkansas, Louisiana

Ettinger-Rosini/Waypoint

ph: (214) 796-3421 email: chuck@ettros.com

territory: Oklahoma, Texas (except El Paso County)

Central Marketing Associates, Inc. ph: (913) 897-2390

fax: (913) 897-2391 email: steve@cmafoodservice.com territory: Missouri, Kansas, Iowa, Nebraska,

Illinois (Southern two thirds of state)

Cassidy's Pro Line

ph: (630) 627-7353 fax: (630) 628-3529

email: dennis@cassidysproline..com territory: Illinois (Central & Northern)

The YES Group

ph: (651) 452-9889 fax: (651) 452-3804

email: sales@thevesgroup.com territory: Minnesota, North Dakota, South Dakota, Wisconsin

Professional Reps ph: (877) 995-8922

fax: (602) 864-1754 email: sales@goproreps.com territory: Arizona, Colorado, New Mexico, Utah, Wyoming, Texas (El Paso County only)

Lund-Iorio

ph: (949) 443-4855 fax: (949) 443-4856 email: scott@lund-iorio.com territory: Nevada (Clark County),

California (CA/Mexico border and southern third of state)

Walter Zebrowski Associates

ph: (415) 883-3222

fax: (415) 883-9332

email: tom@walterzebrowskiassoc.com territory: Nevada (entire state except Clark County), California (Northern two thirds of state)

Kelly-Mincks ph: (425) 481–9036 fax: (425) 806-5283


email: james@kelly-mincks.com territory: Washington, Oregon, Alaska, Montana, Idaho, Hawaii

W.D. Colledge Services 26a - 26f

ph: (604) 999-8579 fax: (905) 677-5337

email: tmoffatt@wdcolledge.com

territory: Canada

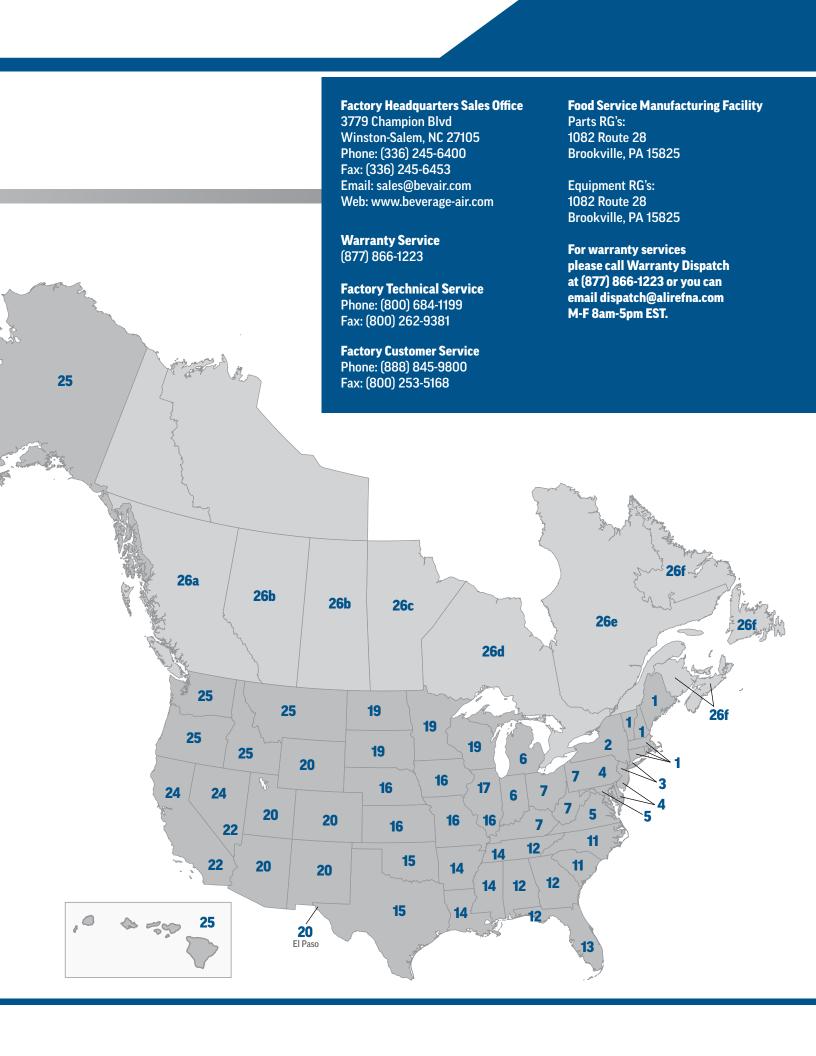

CHECK OUT THE ALL NEW

beverage-air.com









More content, more info, improved navigation.

Visit the new website today!

MASTER20230201

